

Code: SDIP-12-124

POE ADAPTER **SDIP-12-124** ATTE

Net: 7 504.76 HUF Gross: 7 504.76 HUF

The SDIP-12-124 PoE adapter lowers the voltage on the DC plug to 12V and simultaneously transfers the PoE power supply to the RJ45 output. Thanks to this, from one PoE line we can simultaneously power the IP camera and additional devices powered by 12V DC.

The device can be powered from the 802.3af or PoE PASSIVE switch.



SPECIFICATION

Output power:	max. 12 W (total)
Number of inputs:	1 pcs RJ-45
Input voltage:	35 ... 56 V DC - PoE
Output voltage:	<ul style="list-style-type: none">• 35 ... 56 V DC - equal to the input voltage• 12 V DC - 2.1/5.5 mm plug on the cable
Output current:	max. 1 A @ 12 V DC
LED indicators:	<ul style="list-style-type: none">• DC output voltage presence indication - DC OUT• Power supply PoE - Port RJ-45
Main features:	<ul style="list-style-type: none">• LAN ports - 10/100/1000 Mbps• Compliance with PoE (802.3af), Passive PoE• PoE IN ("+" : 1, 2 pins; "+/-" : 3, 6 pins) or ("+" : 4, 5 pins; "+/-" : 7, 8 pins)• PoE OUT ("+" : 4, 5 pins; "-" : 7, 8 pins)• "Index of Protection" : IP20
Protections:	<ul style="list-style-type: none">• Overcurrent (overload) - automatic return to normal operation after the failure has ceased : 2 A• Overvoltage : LAN + PoE IN, LAN + PoE OUT, DC OUT
Housing:	Plastic (polycarbonate)
Operation temp:	-25 °C ... 50 °C
Weight:	0.02 kg
Dimensions:	<ul style="list-style-type: none">• 63 x 20 x 19 mm• 15 cm (cable length)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION


Connectors:



Top view:

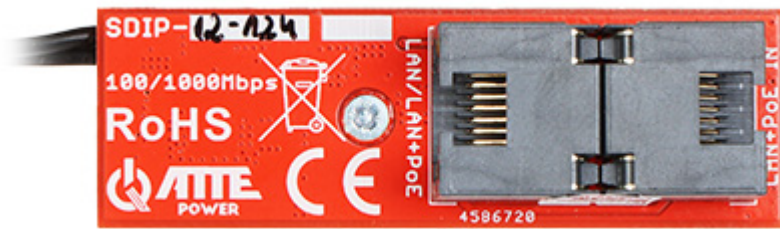

Bottom view:

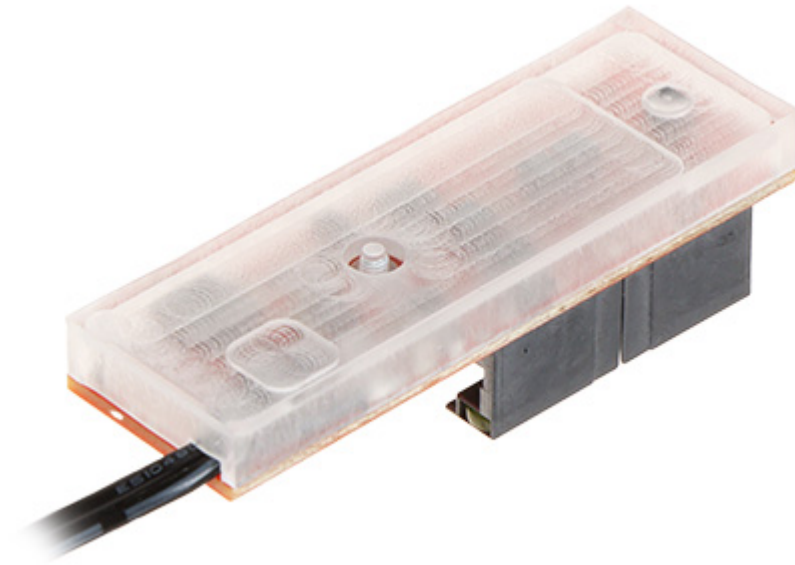

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------