

Code: PSBSH-1012B

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBSH-1012B**

Net: **38.49 EUR** Gross: **38.49 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.
Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION


Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	1 A
Battery charging current:	0.2 A / 0.5 A
Power:	17 W
Number of outputs:	1
Protections:	• Short-circuit • Overload • Overvoltage • Overheat • Tamper • Reverse polarity connection • Discharge
Adapter operation control:	FAC output - indicating AC power collapse
Place for battery:	12V/7Ah
Max. battery dimensions:	160 x 100 x 65 mm
Housing:	Plastic, hermetic
Weight:	1.85 kg
Dimensions:	263 x 184 x 97 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Internal view:

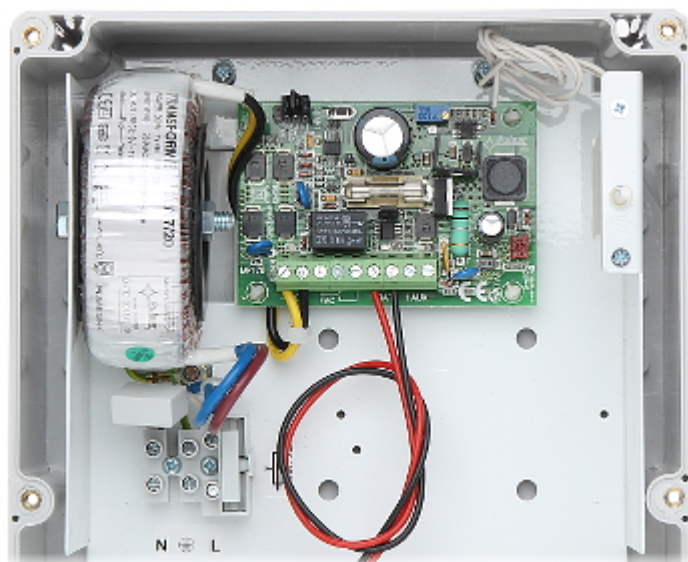


Front view:



Mounting side view:



Dimensions:

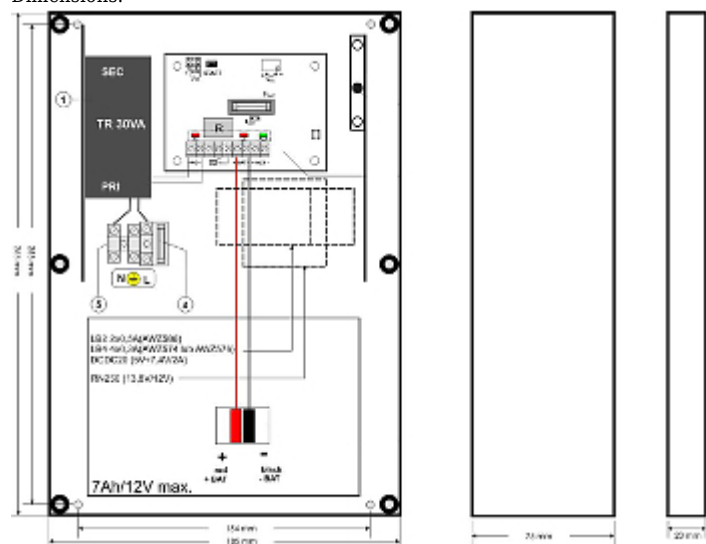

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------