

Code: PSBEN-2012B

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBEN-2012B**

Net: **66.82 EUR** Gross: **66.82 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.
Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Adapter type:	Transforming
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	2 A (max)
Battery charging current:	0.2 A / 0.6 switchable
Power:	31 W
Number of outputs:	1
Main features:	<ul style="list-style-type: none">• LED display• Intelligent management of Power Supply Unit power's output stage• Microprocessor-based automation system• Free software "PowerSecurity" for monitoring the Power Supply Unit operation parameters• Output voltage control• Load current control
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overheat• Tamper• Reverse polarity connection• Discharge• Overcharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• EPS FLT output - indicating AC power collapse• APS FLT output - Battery fault indication• PSU FLT output - Power Supply Unit fault indication• Failure codes with history display
Place for battery:	12V/7Ah
Supported norms:	PN-EN50131-6, 1÷3
Max. battery dimensions:	250 x 130 x 75 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp. / Relative humidity:	-10 ... 40 °C / 20 ... 90 %
Weight:	3.4 kg
Dimensions:	270 x 250 x 88 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Internal view:



Front view:




Example of displayed information:



Mounting side view:



Dimensions:

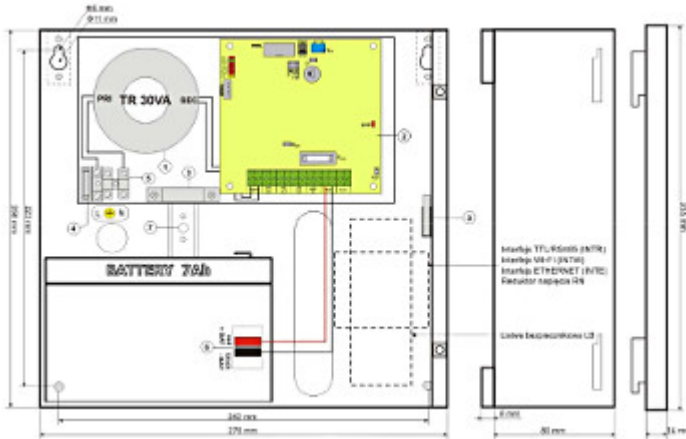

OUR OPINIONS



- The PSBEN-2012B complies with the PN-EN50131-6 standard alarm grade 1+3 and environmental class II.

PACKAGE



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

