


Code: PSBS-5012C

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBS-5012C**

Net: **144.69 EUR** Gross: **144.69 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Please pay attention for proper cooling conditions of the power adaptor during work!

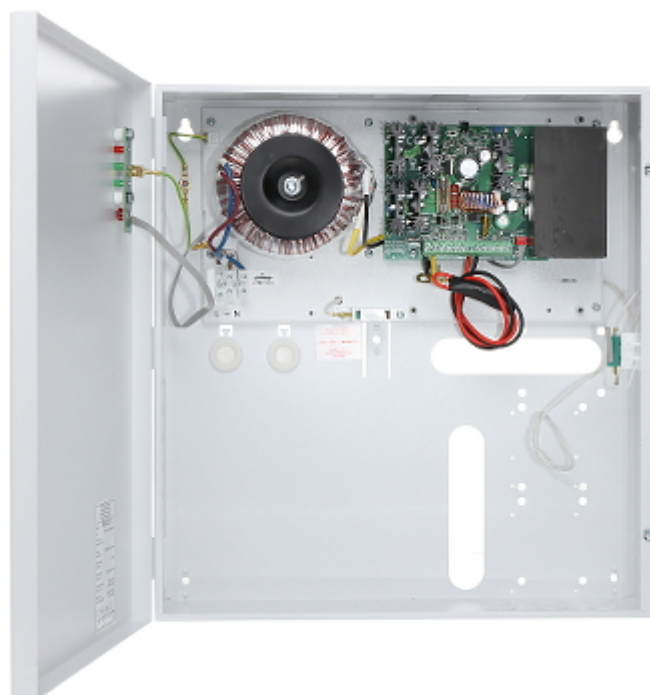

SPECIFICATION

Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	5.5 A
Battery charging current:	0.5 A / 1 A / 2 A / 3 A
Power:	76 W
Number of outputs:	1
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overheat• Tamper• Reverse polarity connection• Discharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• Battery fault indication• EPS FLT output - indicating AC power collapse• PSU output indicating DC voltage loss or power supply unit failure• LoB output - Low battery voltage
Place for battery:	12V/17Ah
Max. battery dimensions:	185 x 170 x 90 mm
Weight:	5.89 kg
Dimensions:	336 x 355 x 112 mm
Manufacturer / Brand:	PULSAR

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

2 years

PRESENTATION

Internal view:




Front view:



Mounting side view:



Dimensions:

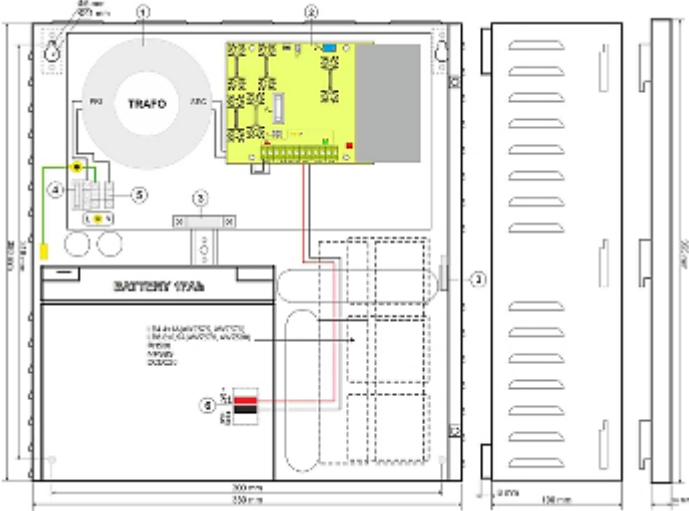

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------