

Code: TC-C32RN SPEC:I5/E/Y/QX/2.8MM/V4.2

DUAL IP CAMERA TC-C32RN SPEC:I5/E/Y/QX/2.8MM/V4.2 2 x 1080p 2 x 2.8 mm TIANDY

Net: 133.18 EUR Gross: 133.18 EUR

The TC-C32RN SPEC:I5/E/Y/QX/2.8MM/V4.2 camera is an IP Camera from Tiandy with DualView technology. Thanks to its unique design, the camera has a viewing angle of over 180°.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Attention! Enabling the ONVIF protocol in the camera disables P2P access.



SPECIFICATION

Standard:	IP
Resolution:	2 x 1920 x 1080 - 1080p
Sensor:	2 x 1/3 " Progressive Scan CMOS
Lens:	2 x 2.8 mm
View angle:	94 ° for single camera
Range of IR illumination:	50 m
RS-485 interface:	—
Image compression method:	S+265 / H.265 / H.264
Alarm inputs / outputs:	—
Audio:	• Microphone built-in • Audio transmission via network
Main stream frame rate:	25 fps @ 2.1 Mpx
Interface:	10/100 Base-T (RJ-45)
Memory card slot:	—
Mobile phones support:	Port no.: 3000 or access by a cloud (P2P) • Android: Free application EasyLive Plus • iOS (iPhone): Free application EasyLive Plus
Access from PC:	Port no.: 3000 or access by a cloud (P2P) - PC: Free application Easy7 Smart Client Express
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.2
Web browser access ports:	80, 443, 3000, 3001, 3002, 23002

Mobile client access ports:	3000, 3001
PC client access ports:	3000, 3001
Port ONVIF:	80
WEB Server:	Built-in
Max. number of on-line users:	2
ONVIF:	✓
Intelligent image analysis:	—
Main features:	• D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Possibility to change the resolution, quality and bit rate • Configurable: brightness, contrast, saturation • Motion Detection
Power supply:	• 12 V DC / 625 mA, • PoE (802.3af)
Power consumption:	≤ 8.5 W
Housing:	Plastic
Color:	White, Black
Mechanical protection class:	—
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.69 kg
Dimensions:	260 x 113 x 133 mm
Supported languages:	Polish, English, Albanian, Arabic, Spanish, Korean, Russian, Thai, French, Dutch, Hebrew, German, Portuguese, Turkish, Ukrainian, Vietnamese, Italian
Manufacturer / Brand:	TIANDY
Guarantee:	3 years

PRESENTATION

Front panel:



Side view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:



In the kit:

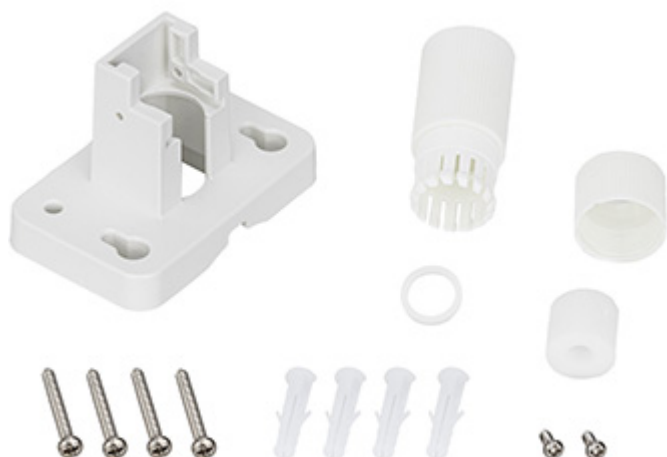

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

