

Code: DH-IPC-HDW1120SP

IP CAMERA **DH-IPC-HDW1120SP** -0280B - 1.3 Mpx 2.8 mm DAHUA

Net: **81.53 EUR** Gross: **81.53 EUR**



IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1280x960. Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Scanning system:	Progressive
Matrix size:	1.3 Mpx
Resolution:	1280 x 960 - 1.3 Mpx 1280 x 720 - 720p 704 x 576 - D1
Lens:	2.8 mm
View angle:	• 89 ° (manufacturer data) • 93 ° (our tests result)
Range of IR illumination:	30 m
S/N ratio:	> 50 dB
Memory card slot:	—
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	—
Bitrate:	4 ... 8192 kbps - H.264
Main stream frame rate:	25 fps @ 1280 x 960
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	2.42
Main features:	• 3D-DNR - Digital Noise Reduction • D-WDR - Wide Dynamic Range • BLC/HLC - Back Light / High Light Compensation • Possibility to change the resolution, quality and bit rate • Configurable Privacy Zones • Mirror - Mirror image
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS , Android: Free application IMOU • iOS (iPhone): Free application DMSS , iOS (iPhone): Free application IMOU
Color:	White
Power supply:	• PoE (802.3af) • 12 V DC / 300 mA
Housing:	Dome - Metal / Plastic
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Dimensions:	Ø 108 x 84 mm
Weight:	0.25 kg
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera is out from clamping ring:



Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




In the kit:



Example captures of device interface:



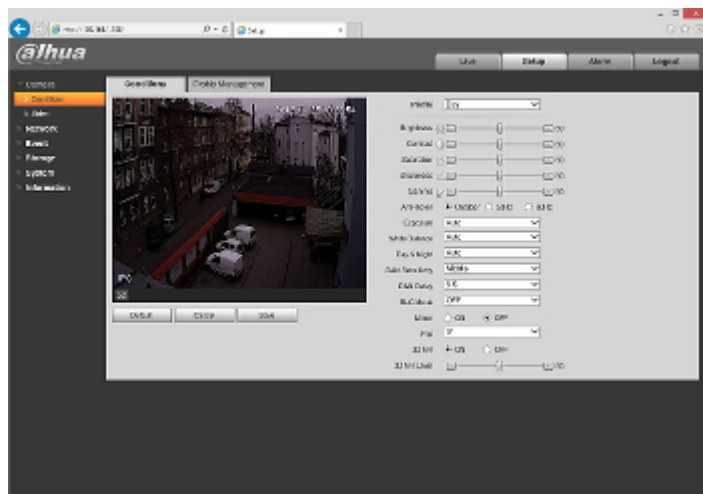

OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

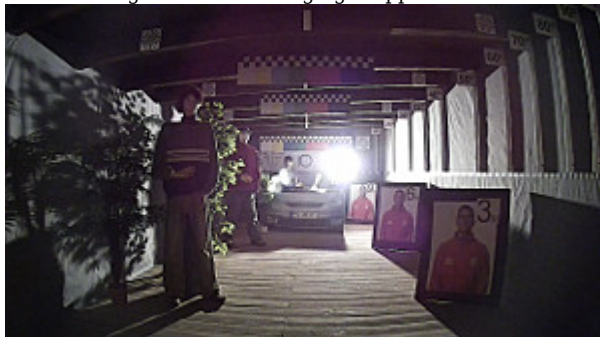

OUR OPINIONS



- The camera is full compatible with DAHUA recorders.

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

