

Code: CD-45A2

CARBON MONOXIDE (CO) DETECTOR **CD-45A2** EURA

Net: **754.96 CZK** Gross: **754.96 CZK**

The CD-45A2 microprocessor-based digital gas detectors are characterized by reliability and low current consumption. A digital temperature compensation feature allows to operate within a wide temperature range.

Gas concentration above the threshold level triggers visual and audible alarm signals. Device should be mounted at a height of about 0.7 ... 1.8 m above the floor.



SPECIFICATION


Detection:	Carbon Monoxide (CO)
Alarm signaling:	• Buzzer • Blinking LED
Gas concentration to trigger alarm:	• 300 ppm for max. 3 mins • 100 ppm for 10 ... 40 minutes • 50 ppm for 60 ... 90 minutes • 30 ppm for >120 minutes
Battery power supply:	2 x battery LR6 (AA) (included) Current consumption 20 µA (Standby mode) 25 mA (alarm)
Main features:	• Alarm signaling > 30 ppm • LCD display • Alarm siren > 85 dB/m • Test mode • Silent mode • Low battery level alarm • Failure signaling • Detector lifetime : 7 years
Operation temp:	0 °C ... 40 °C
Weight:	0.19 kg
Dimensions:	126 x 83 x 50 mm
Manufacturer / Brand:	EURA
Guarantee:	5 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

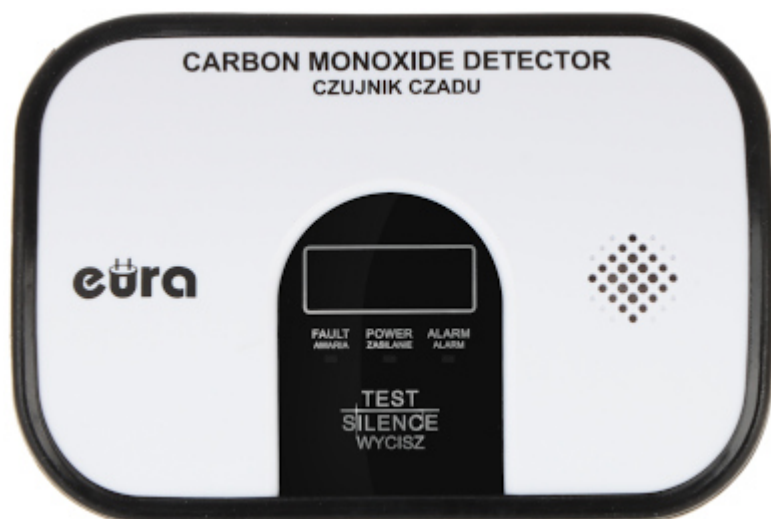

Rear view:



The device is secured with a silicone case, which also serves as a stand:



Place for batteries 2 x 1.5V AA:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------