

Code: DG-1-LPG

# LPG (PROPANE-BUTANE) GAS DETECTOR **DG-1-LPG** SATEL

Net: **204.00 PLN** Gross: **204.00 PLN**

The DG-1-LPG microprocessor-based digital gas detectors are characterized by reliability and low current consumption. A digital temperature compensation feature allows to operate within a wide temperature range.

Gas concentration above the threshold level triggers visual and audible alarm signals. The detectors are intended to be used as part of a security system. The device should be mounted in low position, just above the floor.



## SPECIFICATION

Detection:	LPG (propane-butane) gas
Alarm signaling:	<ul style="list-style-type: none"><li>• Buzzer</li><li>• Blinking LED</li><li>• Signal to control panel</li></ul>
Gas concentration to trigger alarm:	20% lower explosive limit
Prealarm feature:	✓ 10% Lower Explosive Limit (LEL)
Autodiagnosics:	✓
Relay contacts rating (resistive load):	40 mA / 16 V DC
Power supply:	30 ... 50 mA / 12 V DC
Operation temp:	-10 °C ... 55 °C
Weight:	0.050 kg
Dimensions:	Ø 97 x 35 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

## PRESENTATION

Internal view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Rear view + additional kit elements:



Description of particular elements of the device:

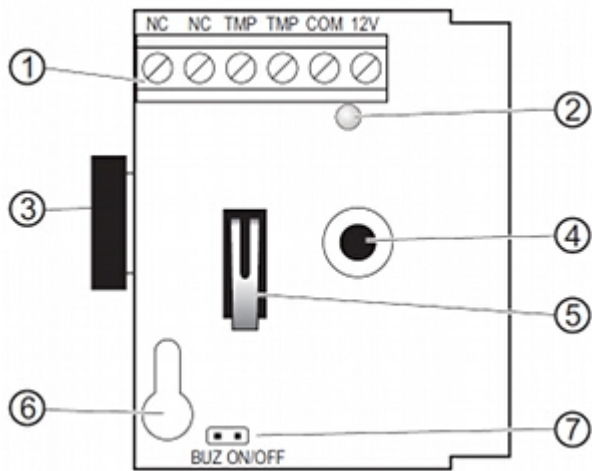

- 1. cable terminals
- 2. LED indicator
- 3. Buzzer
- 4. detector
- 5. tamper contact

- 6. fixing screw hole
- 7. configuration jumpers

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

