

Code: DS-2CC12D8T-AMM

HD-TVI, CVBS CAMERA **DS-2CC12D8T-AMM** - 1080p Hikvision

Net: **458.00 PLN** Gross: **458.00 PLN**

Megapixel camera with Progressive scan CMOS sensor and HD-TVI.

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 8 Mpx (4K). During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

Standard:	HD-TVI, PAL
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	• 1920 x 1080 - 1080p @ HD-TVI, • 960 x 576 - 960H @ PAL
Video output:	1 Vpp 75 Ω HD-TVI / PAL - selectable by switch
Lens:	—
Auto Iris socket:	DC
Min. illumination:	0.005 Lux @ F1.2 (color)
Audio:	—
Alarm inputs / outputs:	—
RS-485 interface:	—
OSD menu:	✓
Main features:	• WDR $\geq$ 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC - Back Light Compensation • Auto White Balance • AGC - Automatic Gain Control • Motion Detection • Privacy zones - max. 4 • Mirror - Mirror image • Sharpness - sharper image outlines

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	• 12 V DC / 250 mA, • 24 V AC / 130 mA
Power consumption:	≤ 3 W
Housing:	BOX, Metal
Color:	Black
Operation temp:	-30 °C ... 60 °C
Weight:	0.21 kg
Dimensions:	69 x 54 x 56 mm
Supported languages:	English
Manufacturer / Brand:	Hikvision
SAP Code:	300509533
Guarantee:	2 years

PRESENTATION

Front view:




Rear view:





Dimensions:

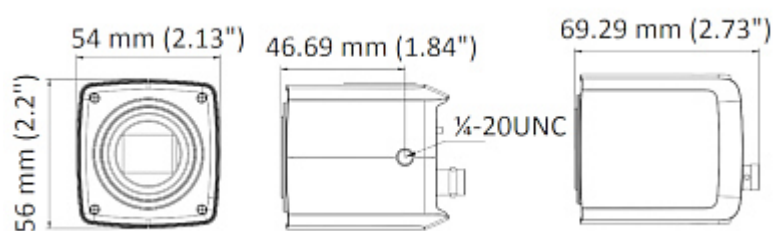

In the kit:



OUR TESTS

HD-TVI:

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:



Camera image at night conditions, at different illumination values show below:

10 LUX:




1 LUX:




0.1 LUX:



0.01 LUX:



0.001 LUX:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------