

Code: TL-PA4022P-KIT

NETWORK ADAPTER **TL-PA4022P-KIT** TP-LINK

Net: **54.00 EUR** Gross: **54.00 EUR**

The TL-PA4022P-KIT network transmitters kit is designed for Ethernet signal transmission through power line. Devices are an ideal solution when it is impossible to install UTP cables or the environment does not allow to use wireless connectivity. Built-in electric outlet allows to connect an additional device to the mains network (such as to a standard wall outlet). Devices must be plugged into the outlets using the same branch (phase).



SPECIFICATION

LAN ports:	1 Port LAN / 2 LAN ports
Modulation:	OFDM
Protections:	128-bit AES encryption
LED diodes:	Power supply, Link/Act, Power network
Transmission speed:	600 Mbps
Range:	300 m - Within a building
Power supply:	230 V AC
Power consumption:	< 2.93 W
Main features:	• Plug & Play • HomePlug AV compliance • Low current consumption • Max. number of supported devices : 6 pcs • Pair button - Encryption activation
Certificates:	CE, FCC, RoHS
Operation temp:	0 °C ... 40 °C
Weight:	0.16 kg
Dimensions:	95 x 79 x 58 mm
Manufacturer / Brand:	TP-LINK
Guarantee:	2 years


PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Bottom view:

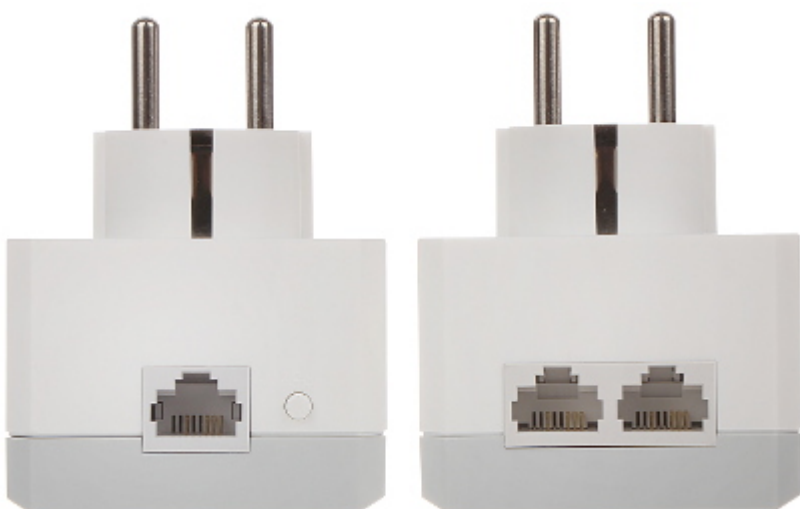


Rear view:





Typical operation diagram:

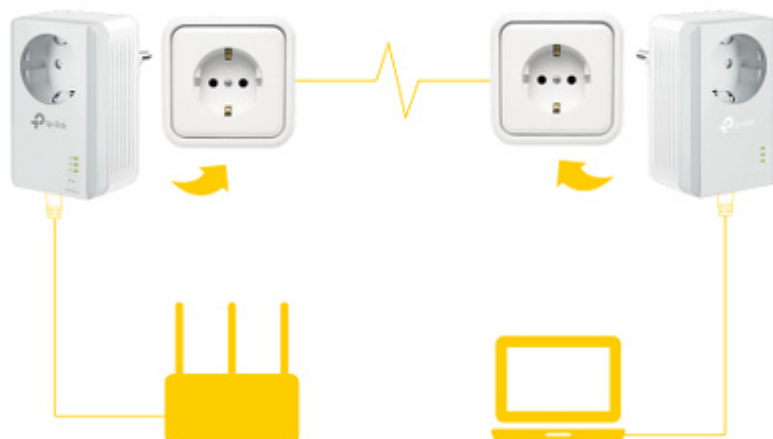

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

