

Code: PH-3

NETWORK ADAPTER **PH-3** Tenda

Net: **53.82 EUR** Gross: **53.82 EUR**

The PH-3 network transmitters kit is designed for Ethernet signal transmission through power line. Devices are an ideal solution when it is impossible to install UTP cables or the environment does not allow to use wireless connectivity.

Devices must be plugged into the outlets using the same branch (phase).




SPECIFICATION

LAN ports:	1 pcs - LAN module
Standards:	HomePlug AV2, IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
Protections:	128-bit AES encryption
LED diodes:	Power supply, Power network, Ethernet
Transmission speed:	1000 Mbps @ Ethernet
Transmission range via electrical installation:	300 m - Within a building
Power supply:	100 ... 240 V AC, 50 / 60 Hz
Power consumption:	max. 3.2 W (operation) 0.38 W (Standby mode)
Main features:	• Plug & Play • QoS • IGMP Snooping • IPTV compliance • Optimization of the video streaming : 1 Gb/s 4K UHD • HomePlug AV 2 compliance • Pair / Reset button - Encryption activation • Operating frequency : 2 ... 86 MHz • Power-saving mode - Energy saving up to 88%
Certificates:	CE, FCC, RoHS
Operation temp:	0 °C ... 40
Weight:	0.1 kg (single element)
Dimensions:	82 x 60 x 70 mm (single element)
Manufacturer / Brand:	Tenda
Guarantee:	2 years

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

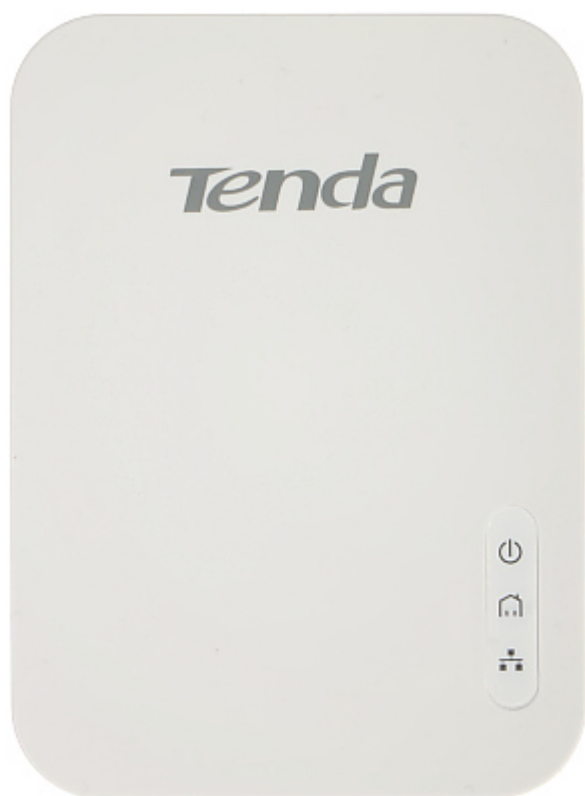

Bottom view:




Typical operation diagram:

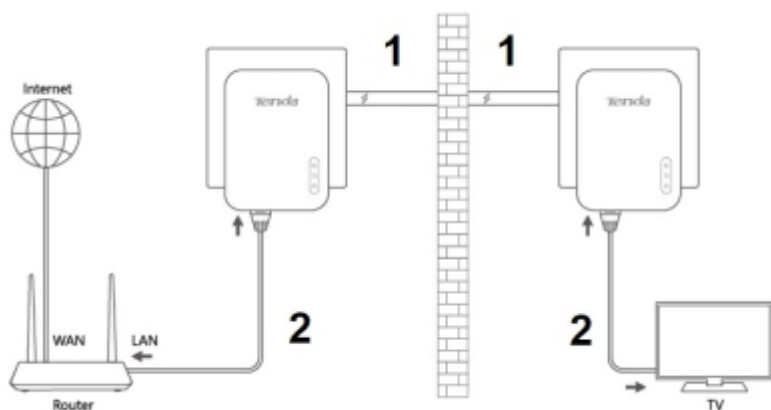

1. Electrical installation of the building

2. Ethernet

In the kit:

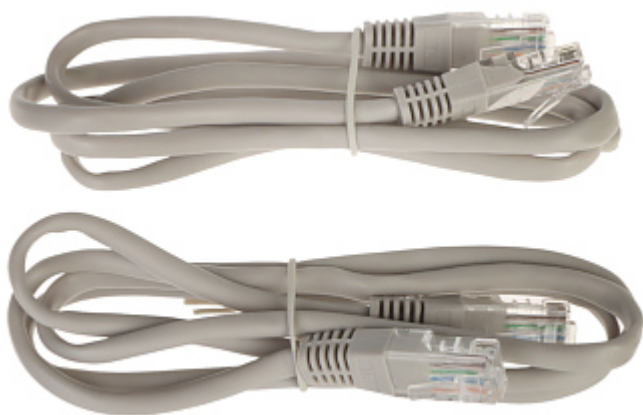

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

