

Code: RS-64

## SWITCH POE TO RACK CABINET **RS-64** 6-PORT PULSAR

Net: **91.06 EUR** Gross: **91.06 EUR**

The RS-64 PoE Switch is an industrial type device enabling fluent network transmission at rates 10 / 100 Mbps. PoE/PoE+ powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.

The device is mounted to RACK 19" cabinet.



### SPECIFICATION

|                       |                                                                                                                                                                                                                             |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN ports:            | <ul style="list-style-type: none"><li>• 4 x RJ45 - LAN &amp; PoE ( 802.3af/at ),</li><li>• 2 x RJ45 - Uplink</li></ul>                                                                                                      |
| Management:           | —                                                                                                                                                                                                                           |
| LED diodes:           | Power, PoE, Link/Act                                                                                                                                                                                                        |
| Transmission speed:   | 10 / 100 Mbps - 4 x LAN & PoE ports<br>10 / 100 Mbps - 2 x Uplink ports                                                                                                                                                     |
| Maximal output power: | 30 W / port PoE+                                                                                                                                                                                                            |
| Maximal total power:  | 48 W                                                                                                                                                                                                                        |
| MAC addresses table:  | 1k                                                                                                                                                                                                                          |
| Main features:        | <ul style="list-style-type: none"><li>• Auto-learning and Auto-aging functions support for MAC addresses</li><li>• (RJ45) 10/100 Mb Auto-Negotiation, Auto MDI/MDIX</li><li>• Industrial wide temperature design.</li></ul> |
| Certificates:         | CE                                                                                                                                                                                                                          |
| Power supply:         | 230 V AC                                                                                                                                                                                                                    |
| Housing:              | Steel - powder painted                                                                                                                                                                                                      |
| Color:                | Black (RAL 9005)                                                                                                                                                                                                            |
| Housing type:         | RACK 19", 1U                                                                                                                                                                                                                |
| Operation temp:       | -10 °C ... 40 °C                                                                                                                                                                                                            |
| Weight:               | 1.95 kg                                                                                                                                                                                                                     |
| Dimensions:           | 482 x 227 x 44 mm                                                                                                                                                                                                           |
| Manufacturer / Brand: | PULSAR                                                                                                                                                                                                                      |
| Guarantee:            | 2 years                                                                                                                                                                                                                     |

### PRESENTATION

Front view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Connectors:



- 1. LAN + PoE
  - 2. LAN + PoE
  - 3. LAN + PoE
  - 4. LAN + PoE
  - 5. LAN
  - 6. LAN
- Top view:

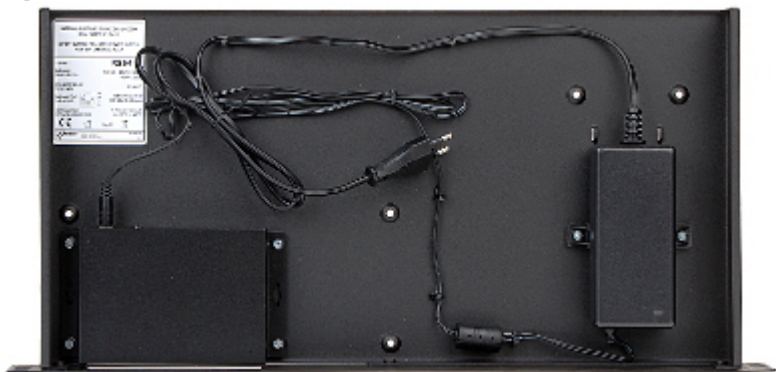

In the kit:



**PACKAGE**

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|