

Code: XPOE-3-11A

POE SWITCH / EXTENDER **XPOE-3-11A** 3-PORT ATTE

Net: **44.10 EUR** Gross: **44.10 EUR**

The small dimensions of the device allow convenient installation in an electrical box or camera bracket. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

The LAN 1 port functions as the Uplink port and PoE power input (standard: 802.3af, 802.3at or Passive PoE). The LAN 2, LAN 3 ports allow connected devices to be powered via Passive PoE.

Attention! To power devices that comply with the PoE 802.3af/at standard, the input voltage must not be lower than 44V DC. Do not connect devices that are not powered by PoE to ports LAN 2, LAN 3.




SPECIFICATION


LAN ports:	• 1 x RJ45 10/100 Base-T + power input : PoE (802.3af/at) / Passive PoE, • 2 x RJ45 10/100 Base-T + Passive PoE
Management:	—
LED diodes:	LAN, PoE
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 2 LAN & PoE ports
Maximal output power:	50 W @ port PoE
Maximal total power:	50 W
Main features:	• Switch powered by PoE in accordance with the IEEE 802.3af/at standard or via Passive PoE from ATTE devices • Possibility to connecting in cascade • The device can function as a LAN network and PoE power extender • The output PoE voltage is equal to the input voltage • Sequential start of PoE OUT outputs
Power supply:	• 35 ... 56 V DC - Passive PoE @ LAN 1 • 44 ... 56 V - PoE (802.3af/at) @ LAN 1
Power consumption:	< 0.5 W
Weight:	0.03 kg
Dimensions:	73 x 52 x 23 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

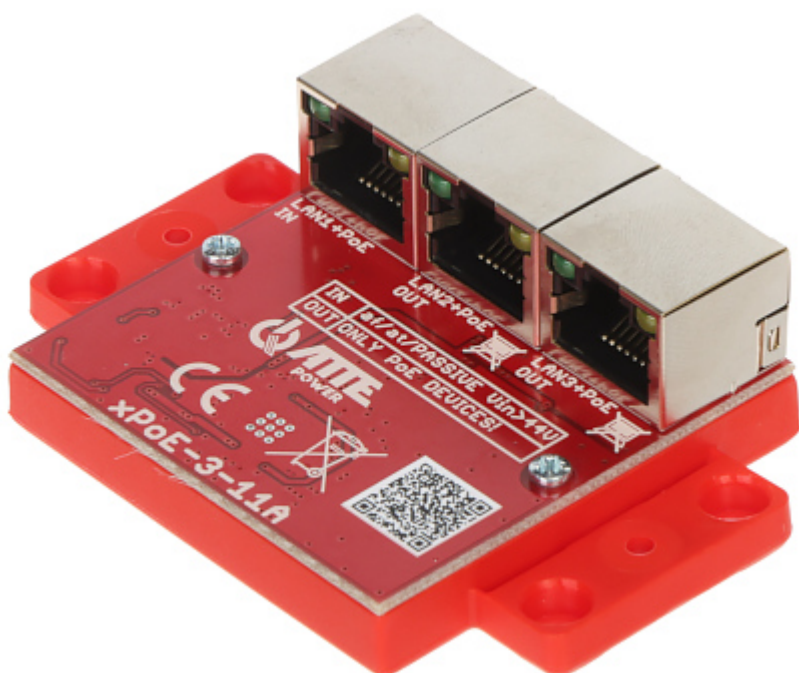

Connectors:

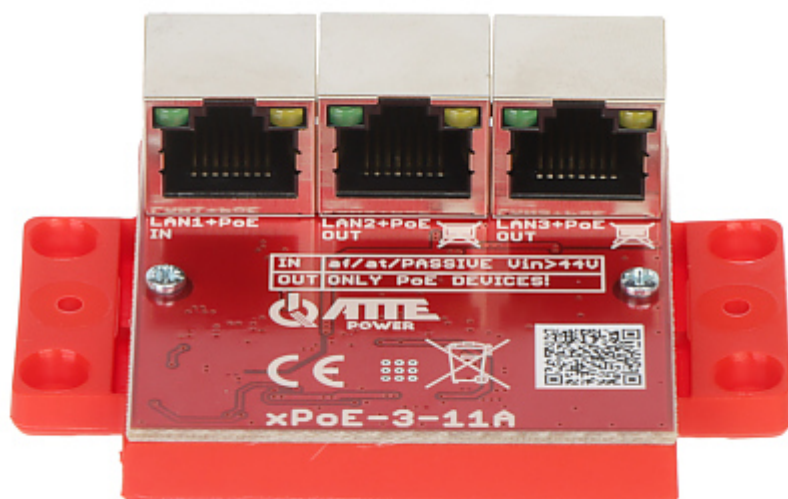

Top view:

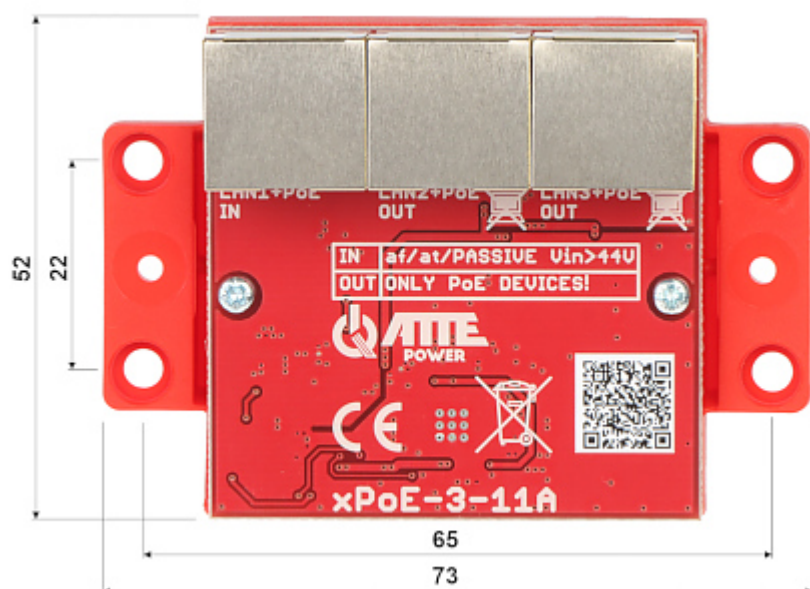

Bottom view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------