

Code: DS-3E1310HP-EI

SWITCH POE **DS-3E1310HP-EI** 8-PORT Hikvision

Net: **158.80 EUR** Gross: **158.80 EUR**

The DS-3E1310HP-EI switch is designed for large streams of video data in the CCTV IP surveillance networks.



SPECIFICATION

LAN ports:	• 8 x RJ45 10/100 Base-TX (2 x Hi-PoE (802.3af/at/bt) + 6 x PoE (802.3af/at)), • 2 x RJ45 10/100/1000 Base-TX - Uplink
Transmission speed:	• 10 / 100 Mbps - 8 LAN & PoE ports, • 10 / 100 / 1000 Mbps - 2 Uplink ports
Maximal output power:	• 90 W / port Hi-PoE / PoE 802.3bt - 1, 2 ports • 30 W / port PoE 802.3af/at - 3 ... 8 ports
Maximal total power:	110 W
MAC addresses table:	16k
Management:	—
Default IP address:	192.168.1.64
Default admin user / password:	admin / -
Operation modes:	• Extend On : 300 m, 10 Mbps @ UTP cat. 5e, 6 • Extend Off : 100 m, 100 Mbps @ UTP cat. 5e, 6
Main features:	• The device supports 8-pin power supply • Configuration and management from the iVMS-4200 application • Remote update of software • View topology and network status • Data Flow Control • Alarm notifications • Possibility to mount to the wall
LED diodes:	Power, Link/Act, PoE, PoE Max, 9 Uplink, 10 Uplink
Certificates:	CE
Housing:	Desktop, Metal
Protections:	Overvoltage 6 kV - PoE ports
Power supply:	54 V DC / 2.22 A (power adapter included)
Operation temp:	-10 °C ... 55 °C
Weight:	0.54 kg
Dimensions:	218 x 103 x 28 mm
Manufacturer / Brand:	Hikvision
SAP Code:	301802043


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

3 years

PRESENTATION

Front panel:

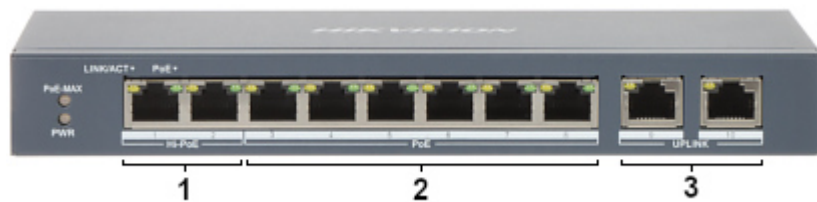

1 - LAN + Hi-PoE

2 - LAN + PoE

3 - Port Uplink

Rear panel:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg