

Code: GTX-PLM1-10-8G2SFP

## INDUSTRIAL POE SWITCH **GTX-PLM1-10-8G2SFP** 8-PORT SFP

Net: **175.96 EUR** Gross: **175.96 EUR**

The GTX-PLM1-10-8G2SFP PoE Switch is an industrial type device enabling fluent network transmission at rates 10 / 100 / 1000 Mbps. Devices of this type can be used in installations realized in industrial facilities in harsh environmental conditions like high or low temperature.

Attention! The SFP port requires the SFP module, which is available in our offer.

**Attention!** No power adapter included.



### SPECIFICATION

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN ports:                     | <ul style="list-style-type: none"><li>• 2 x port SFP 1000 Base-X Uplink,</li><li>• 8 x RJ45 10/100/1000 Base-T ( PoE 802.3af/at ) ,</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Management:                    | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Default IP address:            | 192.168.2.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Default admin user / password: | admin / admin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Transmission speed:            | <ul style="list-style-type: none"><li>• 10 / 100 / 1000 Mbps - 8 LAN &amp; PoE ports,</li><li>• 1000 Mbps - 2 SFP ports</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Maximal output power:          | <ul style="list-style-type: none"><li>• 90 W / port PoE 802.3bt : 1 ... 2,</li><li>• 30 W / port PoE : 3 ... 8 ,</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximal total power:           | 120 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| MAC addresses table:           | 8K                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Main features:                 | <ul style="list-style-type: none"><li>• Data Flow Control</li><li>• One programmable relay output</li><li>• QoS - mechanisms, which provide the high quality of transmission</li><li>• DHCP client/server support</li><li>• EXTEND mode - ports PoE1 ... PoE8 support transmission up to 250 m</li><li>• VLAN mode</li><li>• protection against lightning discharges and voltage differences and strokes between devices</li><li>• Industrial wide temperature design.</li><li>• Possibility to mount on a wall, or on the DIN TS-35 rail</li><li>• RESET button</li><li>• Temperature and Humidity Sensor</li><li>• Possibility to connect an external WZ activation indicator</li></ul> |
| LED diodes:                    | PWR 1, PWR 2, PoE, Link/Act                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                 |                                                                                    |
|-----------------|------------------------------------------------------------------------------------|
| Certificates:   | CE, FCC, RoHS                                                                      |
| Power supply:   | 48 ... 57 V DC, The ability to connect two power adapters - redundant power supply |
| Housing:        | Metal                                                                              |
| Operation temp: | -40 °C ... 75 °C                                                                   |
| Weight:         | 0.7 kg                                                                             |
| Dimensions:     | 165 x 123 x 52 mm                                                                  |
| Guarantee:      | <b>3 years</b>                                                                     |

## PRESENTATION


Front panel:




Power connector:



Rear view:

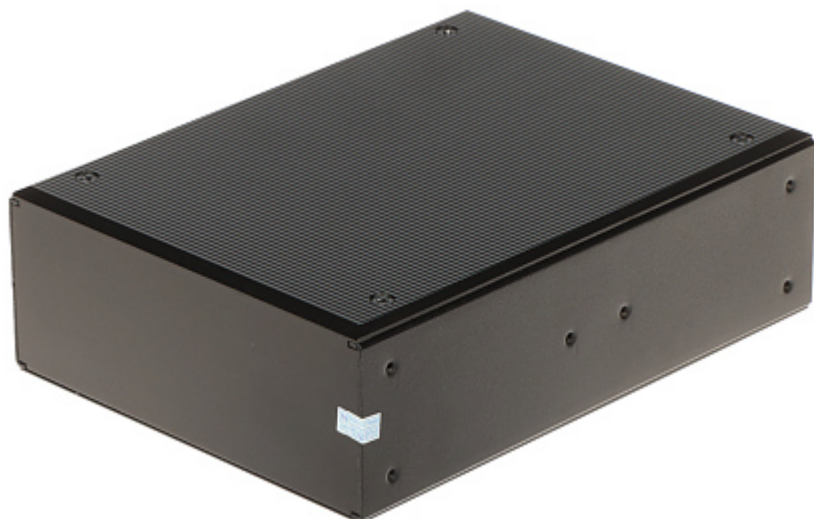

In the kit:

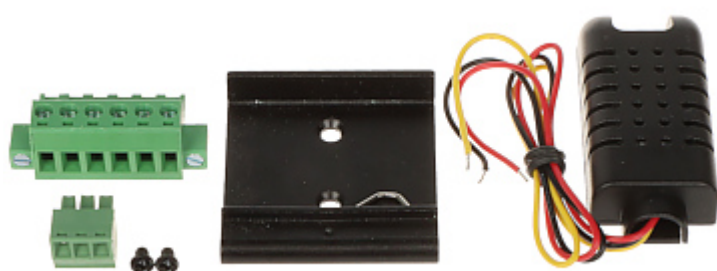

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60