

Code: SXT-LITE2

CUSTOMER PREMISES EQUIPMENT **SXT-LITE2** MIKROTIK

Net: **55.80 EUR** Gross: **55.80 EUR**

The SXT-LITE2 is an integrated solution for professional outdoor wireless networks. Thanks to a unique construction, device offers unparalleled performance in such a compact device.

The casing made of UV resistant plastic is resistant to even the most severe weather conditions. The device is compatible with MikroTik RouterOS platform.



SPECIFICATION

Frequency range:	2312 MHz ... 2732 MHz
Antenna type:	10 dBi Integrated, 2Tx 2Rx MIMO
Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Baud rates:	100 Mbps
Max. power consumption:	8 W
Ethernet interface:	10/100 Mbps
Vertical beam width (V):	60 °
Horizontal beam width (H):	60 °
Operation mode:	Client, WDS client, Router, Bridge (Point-to-Point) - 3 The level of license MikroTik RouterOS
Protections:	Overvoltage protection
Transmitter power:	27 dBm
Memory:	64 MB RAM, 16 MB Flash
Processor:	AR9344 600 MHz
Power supply PoE:	✓
Power supply:	8 V ... 30 V DC PoE (power adapter included)
Operation temp:	-40 °C ... 70 °C
Weight:	0.27 kg
Dimensions:	Ø 140 x 66 mm




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	MikroTik
Guarantee:	2 years

PRESENTATION

Side view:

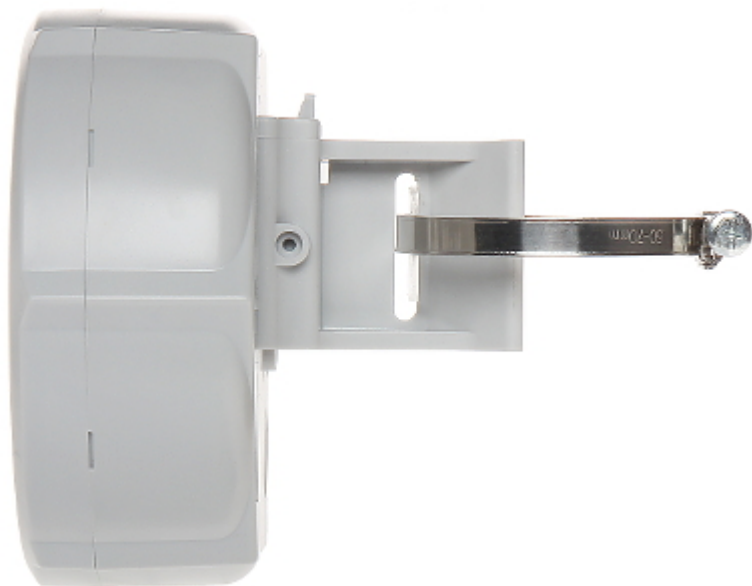

Top view:



Mounting side view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:



Polar pattern for horizontal polarization (respectively horizontal and vertical plane):

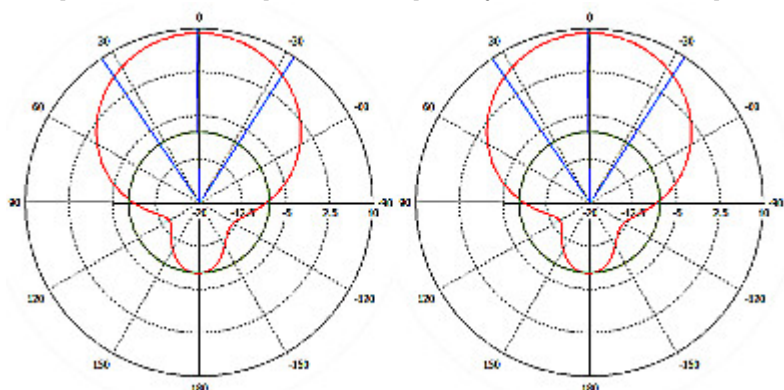

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

