

Code: SXT-LITE5

CUSTOMER PREMISES EQUIPMENT **SXT-LITE5** MIKROTIK

Net: **63.38 EUR** Gross: **63.38 EUR**

The SXT-LITE5 is an integrated solution for professional outdoor wireless networks. Thanks to a unique construction, device offers unparalleled performance in such a compact device.

The casing made of UV resistant plastic is resistant to even the most severe weather conditions. The device is compatible with MikroTik RouterOS platform.




SPECIFICATION

Frequency range:	4920 MHz ... 5920 MHz
Antenna type:	16 dBi - Integrated, 2Tx 2Rx MIMO
Standards:	IEEE 802.11a, IEEE 802.11n
Baud rates:	100 Mbps
LAN ports:	1 x 10/100 Mbps
Vertical beam width (V):	60 °
Horizontal beam width (H):	60 °
Operation modes:	Client, WDS client, Router, Bridge (Point-to-Point) - 3 The level of license MikroTik RouterOS
Protections:	Overvoltage protection
Transmitter power:	27 dBm
Memory:	64 MB RAM, 128 MB NAND
Processor:	AR9344 600 MHz
Power supply PoE:	✓
Power supply:	8 V ... 32 V DC PoE (power adapter included)
Power consumption:	8 W
Operation temp:	-30 °C ... 80 °C
Weight:	0.280 kg

Dimensions:	Ø 140 x 66 mm
Manufacturer / Brand:	MikroTik
Guarantee:	2 years

PRESENTATION

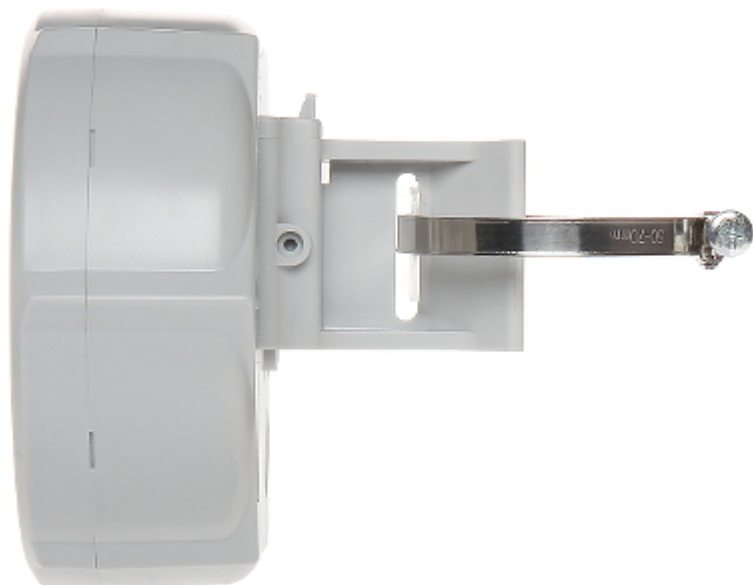

Mounting side view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Device connectors:



Polar pattern for horizontal polarization (respectively horizontal and vertical plane):

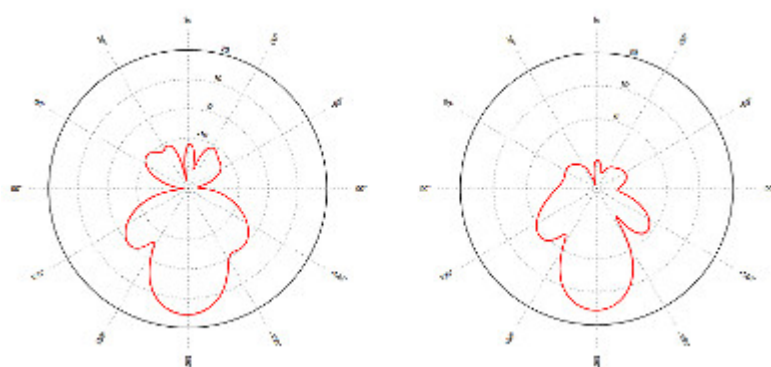

Polar pattern for vertical polarization (respectively horizontal and vertical plane):

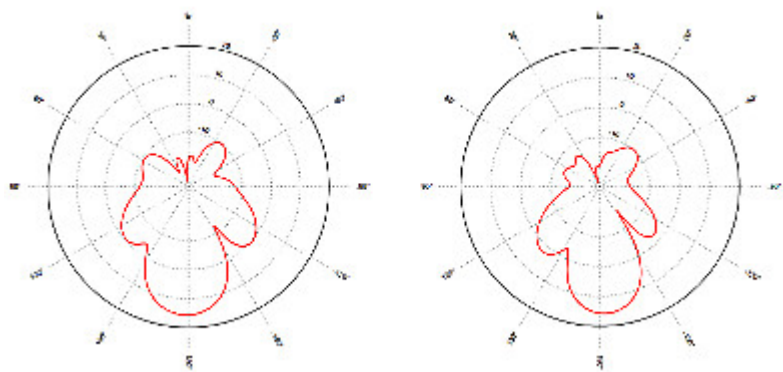

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------