

Code: SXTG-5HPACD-SA

ACCESS POINT WITH ANTENNA **SXTG-5HPACD-SA** MIKROTIK

Net: **144.58 EUR** Gross: **144.58 EUR**

The SXTG-5HPACD-SA is an integrated solution for professional outdoor wireless networks. Thanks to a unique construction, device offers unparalleled performance in such a compact device.

The casing made of UV resistant plastic is resistant to even the most severe weather conditions. The device is compatible with MikroTik RouterOS platform.



SPECIFICATION

Frequency range:	5745 MHz ... 5825 MHz
Antenna type:	13 dBi Integrated, 2Tx 2Rx MIMO
Standards:	IEEE 802.11ac, IEEE 802.11a, IEEE 802.11n
Baud rates:	866 Mbps
LAN ports:	1 x 10/100/1000 Mbps
Vertical beam width (V):	90 °
Horizontal beam width (H):	90 °
Operation modes:	Access Point, Access Point WDS, Sector Access Point, Client, WDS client, Router or Bridge - 4 The level of license MikroTik RouterOS
Protections:	Overvoltage protection
Transmitter power:	30 dBm
Memory:	128 MB RAM, 128 MB NAND
Processor:	QCA9882 720 MHz
Port USB:	2.0
Power supply PoE:	✓
Power supply:	• 15 V ... 60 V DC PoE (the set includes a power supply with 2.1/5.5mm connector and a compatible PoE power adapter) • PoE (802.3af/at)
Power consumption:	12 W




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-30 °C ... 80 °C
Weight:	0.292 kg
Dimensions:	Ø 140 x 66 mm
Manufacturer / Brand:	MikroTik
Guarantee:	2 years

PRESENTATION

Side view:

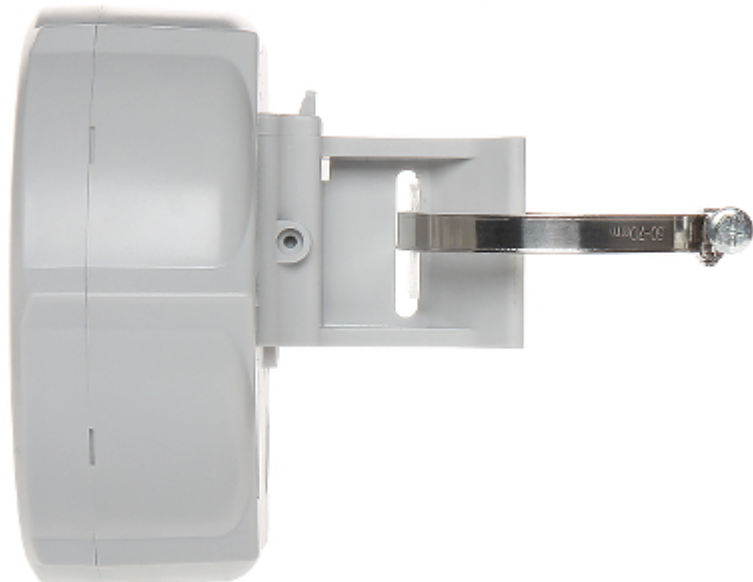

Top view:



Mounting side view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:



Polar pattern for horizontal polarization (respectively horizontal and vertical plane):

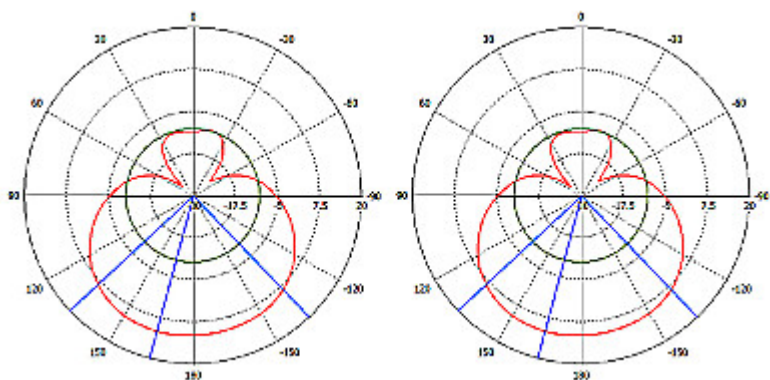

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

