

Code: DHI-HCVR5416L-V2

HD-CVI, PAL, TCP/IP DVR **DHI-HCVR5416L-V2** 16 CHANNELS +eSATA DAHUA

Net: **336.40 EUR** Gross: **336.40 EUR**

Tribrid DVR working in three standards: HD-CVI, IP and analog.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. Via single coaxial cable can be transmitted three signals: video, audio and control. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

Standard:	HD-CVI, PAL, TCP/IP
Maximal total frame rate:	HD-CVI, IP, PAL : 240 fps @ 1920 x 1080 400 fps @ 1280 x 720 400 fps @ 960 x 576
Recording speed adjustment:	HD-CVI, PAL, IP : 1 ... 15 fps @ 1920 x 1080 1 ... 25 fps @ 1280 x 720 1 ... 25 fps @ 960 x 576
Supported resolutions:	• 16 x HD-CVI @ 1080p / Composite Video (CVBS) @ 960H • 2 x IP @ 720p / 1080p
Operation modes:	• 16 x HD-CVI / PAL • 15 x HD-CVI / PAL + 1 x IP 720p / 1080p • 14 x HD-CVI / PAL + 2 x IP 720p / 1080p • 2 x IP 720p / 1080p
Video inputs:	16 pcs BNC - HD-CVI / PAL
Video outputs:	1 pcs HDMI 1 pcs VGA 1 pcs BNC
Audio inputs:	• 4 pcs BNC • 1 pcs BNC - Microphone
Audio outputs:	• 1 pcs BNC • 1 pcs BNC - Microphone
Image compression method:	H.264
Number of compression levels:	5
Image records resolutions:	1920 x 1080 1280 x 720 960 x 576 704 x 576 352 x 288 176 x 144
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	4 x 6 TB SATA + 1 x 6 TB eSATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive

Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy)
Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters
Network protocols:	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP
Bitrate:	max. 160 Mbps (total)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus
Alarm inputs / outputs:	16 / 6
PTZ control:	RS-485 PELCO-D/P
Motion Detection:	Split the screen into zones 22 x 18 motion zones Very good sensitivity after motion detection records detected channels only
Mouse support:	✓
IR remote controller in the set:	✓
Power supply:	230 V AC
Weight:	4.79 kg
Dimensions:	440 x 423 x 68 mm
Supported languages:	English, Polish
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



Front view:



Rear view:



In the kit:

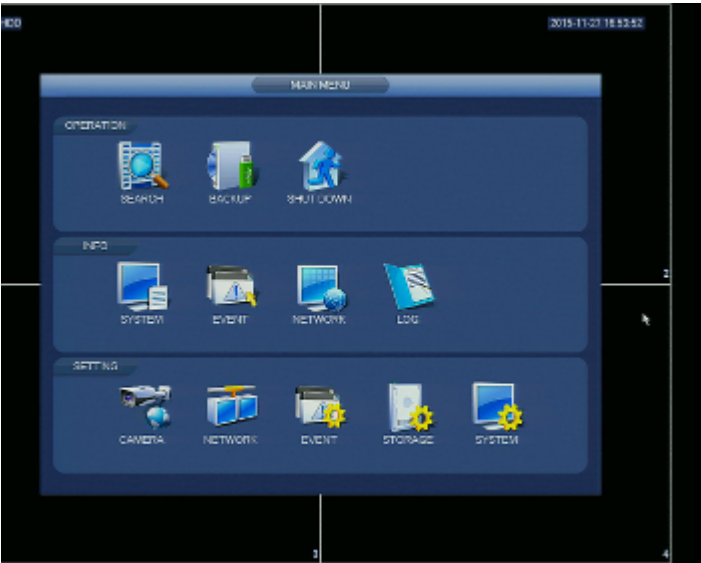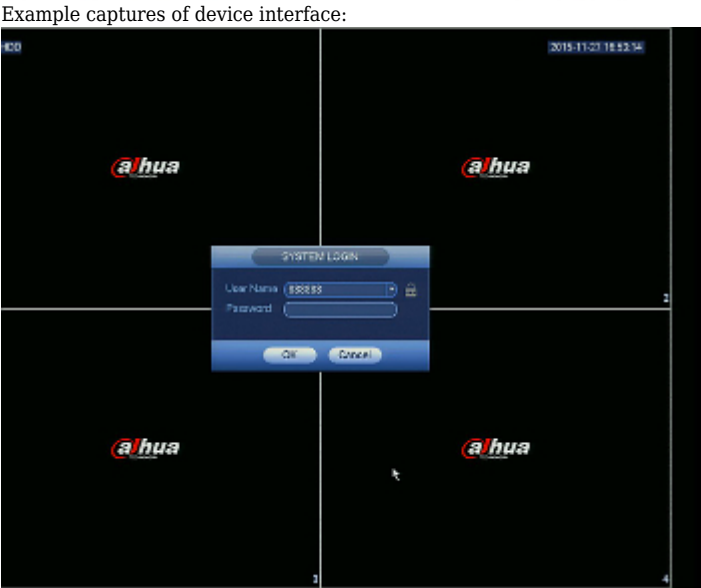

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

- The recorder is full compatible with Dahua cameras.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

