

Code: XVR5104HS-4KL-I3

AHD, HD-CVI, HD-TVI, CVBS, TCP/IP DVR **XVR5104HS-4KL-I3** 4 CHANNELS DAHUA

Net: **251.58 EUR** Gross: **251.58 EUR**

The XVR5104HS-4KL-I3 digital recorder with AHD (Analog High Definition), HD-CVI (High Definition Composite Video Interface), HD-TVI (High Definition Transport Video Interface), TCP/IP and CVBS interface is a professional device applicable in surveillance systems.

The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.

NVR equipped with advanced functions of intelligent image analysis.



SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, CVBS, TCP/IP
Video inputs:	4 pcs BNC
Video outputs:	1 pcs HDMI 4K 1 pcs VGA There is a possibility to configure a SPOT function on one of the output
Audio inputs:	• 1 pcs - CINCH • 4 - Audio support via coaxial cable, HD-CVI only
Audio outputs:	1 pcs CINCH
Image compression method:	AI Coding / H.265+ / H.265 / H.264+ / H.264
Image records resolutions:	• AHD / HD-CVI / HD-TVI : 8 Mpx - 3840 x 2160 , 6 Mpx - 2880 x 1920 - HD-CVI only , 5 Mpx - 2592 x 1944 , 4 Mpx - 2560 x 1440 , 4M-N - 1280 x 1440 , 3 Mpx - 2048 x 1536 - AHD / HD-TVI only , 1080p - 1920 x 1080 , 720p - 1280 x 720 • CVBS : 960H - 960 x 576 • IP : max. 8 Mpx - 3840 x 2160
Recording speed adjustment:	8 Mpx IP @ 1 ... 25 fps 8 Mpx @ 1 ... 7 fps 6 Mpx @ 1 ... 10 fps 5 Mpx @ 1 ... 12 fps 4 Mpx @ 1 ... 15 fps 4M-N @ 1 ... 25 fps 3 Mpx @ 1 ... 15 fps 1080p @ 1 ... 25 fps 720p @ 1 ... 25 fps 960H @ 1 ... 25 fps for each channel
Operation modes:	4 x AHD / HD-CVI / HD-TVI / CVBS / IP + 4 x IP
Recording modes:	Manual, Motion Detection, Schedule
Supported hard drives:	1 x 10 TB SATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy) Intelligent face search AI - simultaneous search in the archive of face recordings based on max 8 photos taking into account the similarity threshold (for each photo separately) 1/4 channel synchronous playback
Network functions:	Full support via network , Remote records copying , Web Server built-in max. 128 on-line users
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras Control compatible with coax PTZ HD-CVI RS-485 - PELCO-D/P
Motion Detection:	✓
Main features:	• Cooperation with Dahua devices working in the concept of the Internet of Things (IoT), • POS - support the machines installed in the points of sales and displaying the date from them as overlaid text on selected channel window, • SMD PLUS - searching for an object classified as: human, motor vehicle • Coax Audio/Alarm support, • Intelligent Image Analysis : crossing the line (tripwire), crossing the line (tripwire), abandoned/missing object, classification of people and vehicles • advanced face recognition and search functions • Support for up to 10 face databases, including 20 000 face images • Detection of faces not included in the device database • Searching for faces in recordings based on max 8 selected photos with the ability to independently set the similarity threshold for each photo
USB:	2 pcs USB 2.0
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 2 A (power adapter included)
Color:	Black
Weight:	0.89 kg
Dimensions:	260 x 236 x 48 mm
Supported languages:	Polish, English, Czech, Danish, Finnish, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Hungarian, Italian
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	5 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Rear view:



In the kit:



Example captures of device interface:

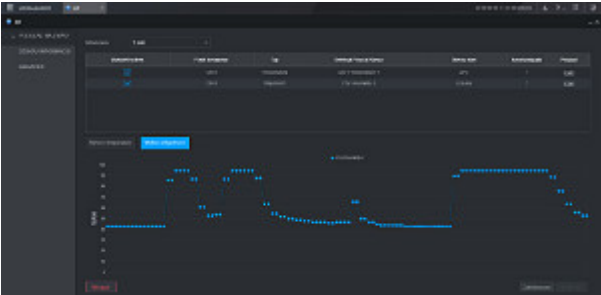

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------