

Code: DH-IPC-EBW8600P-IVC

IP VANDALPROOF CAMERA **DH-IPC-EBW8600P-IVC** - 6 Mpx 1.3 mm - Fish Eye DAHUA

Net: **645.81 EUR** Gross: **645.81 EUR**

IP camera with "fish eye" wide-angle lens.
Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.
PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.
The camera uses the Immervision Optics.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	6.0 Mpx
Scanning system:	Progressive
Resolution:	3072 x 2048 - 6 Mpx , 2048 x 2048 - 4.2 Mpx , 2048 x 1536 - 3.1 Mpx
Lens:	1.3 mm - Fish Eye / F2.8 The camera uses the Immervision Optics
View angle:	180 °
Range of IR illumination:	10 m
S/N ratio:	> 50 dB
RS-485 interface:	—
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	2 / 1
Audio:	• Microphone built-in • External microphone input • Audio output • Bi-directional audio streaming support
Bitrate:	8 ... 12288 kbps
Main stream frame rate:	25 fps @ 6 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS, TCP/IP, IPv4, UDP, SMTP, FTP, DHCP, DDNS, NTP, DNS, ARP, RTSP, RTP, UPnP
Memory card slot:	Micro SD memory cards up to 64GB support (possible local recording)


Mobile phones support:	Port 37777 • Android: Free application DMSS • iOS (iPhone): Free application DMSS There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	2.42
Main features:	• IVS analysis - crossing the line (tripwire), intrusion, FishEye Intelligent • Heat map - the selection in the image by corresponding colors the areas with different traffic • 3D-DNR - Digital Noise Reduction • D-WDR - Wide Dynamic Range • Possibility to change the resolution, quality and bit rate • Time mark and image description • Image rotation and mirror • Configurable: brightness, contrast, saturation • Privacy zones
Vandal-proof:	✓
Power supply:	• PoE (802.3af), • 12 V DC / 1080 mA
Power consumption:	≤ 13 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.624 kg
Dimensions:	Ø 150 x 51 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

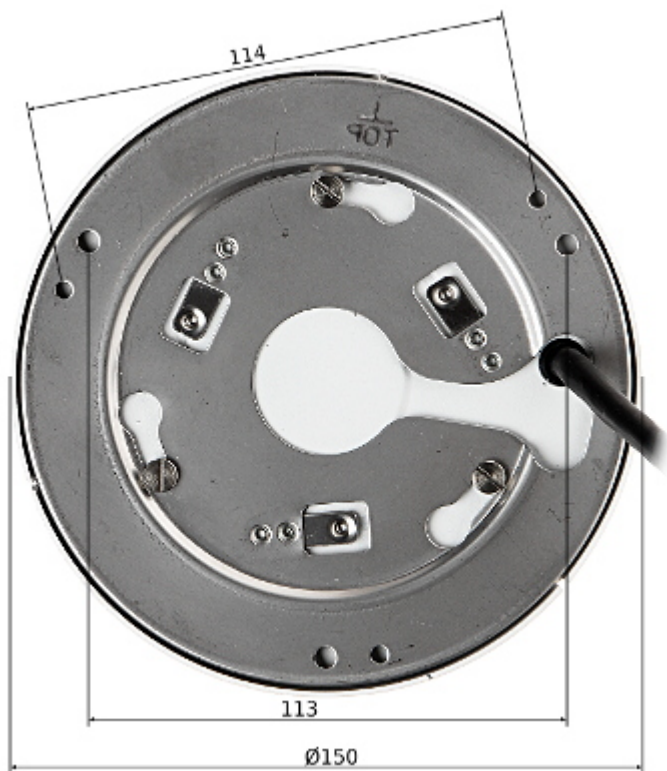


Connectors description:

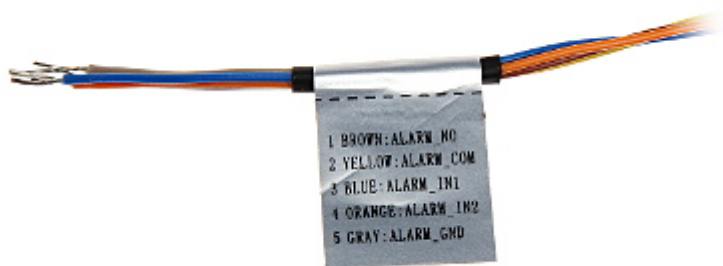

Micro SD card slot is located inside the camera:



Operation modes:

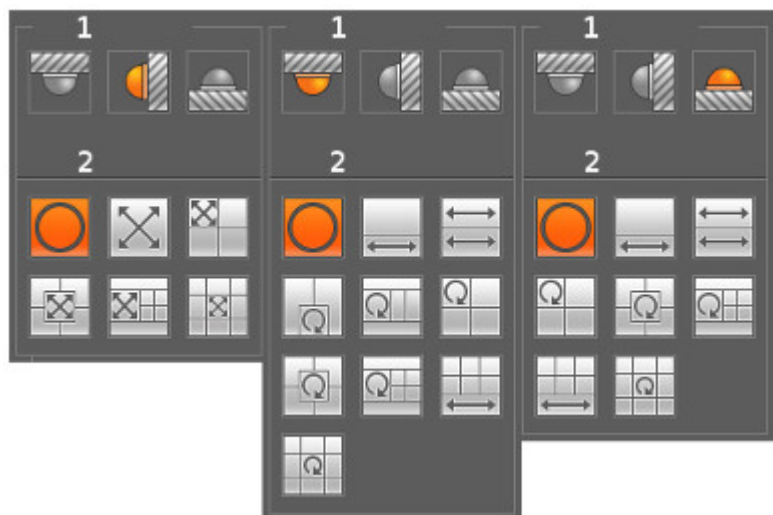

1. Installation type

2. Display modes

Display modes:

:

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------