

Code: HAC-HDBW2221FP-0360B

HD-CVI, PAL VANDALPROOF CAMERA **HAC-HDBW2221FP-0360B** - 1080p 3.6 mm DAHUA

Net: **83.51 EUR** Gross: **83.51 EUR**

Megapixel camera with 1/2.7" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

The camera has a very flat profile, it's only 51 mm out from the ceiling.



SPECIFICATION

Standard:	HD-CVI, PAL
Sensor:	1/2.7 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 720p 960 x 576 - 960H, PAL
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	3.6 mm
View angle:	• 90 ° (manufacturer data) • 86 ° (our tests result)
S/N ratio:	> 65 dB
Video output:	• HD-CVI, 1 Vpp / 75 Ω • PAL, 1 Vpp / 75 Ω
Audio:	Microphone built-in
Main features:	• WDR - 120 dB - Wide Dynamic Range • 2D-DNR / 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ICR - Movable InfraRed filter • BLC/HLC - Back Light / High Light Compensation • Mirror - Mirror image • Motion Detection • Privacy zones • Additional "Spot" CVBS output - allows to quick view the image from camera and its configuration without the need to disconnect it from monitoring system • Auto White Balance
OSD menu:	OSD menu available via DAHUA recorder
Power supply:	12 V DC / 280 mA
Power consumption:	≤ 3.5 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Housing:	Dome, Aluminum
Color:	White
Vandal-proof:	IK10
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.32 kg
Dimensions:	Ø 106 x 51 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Camera view after remove the Dome cover:



Mounting side view:

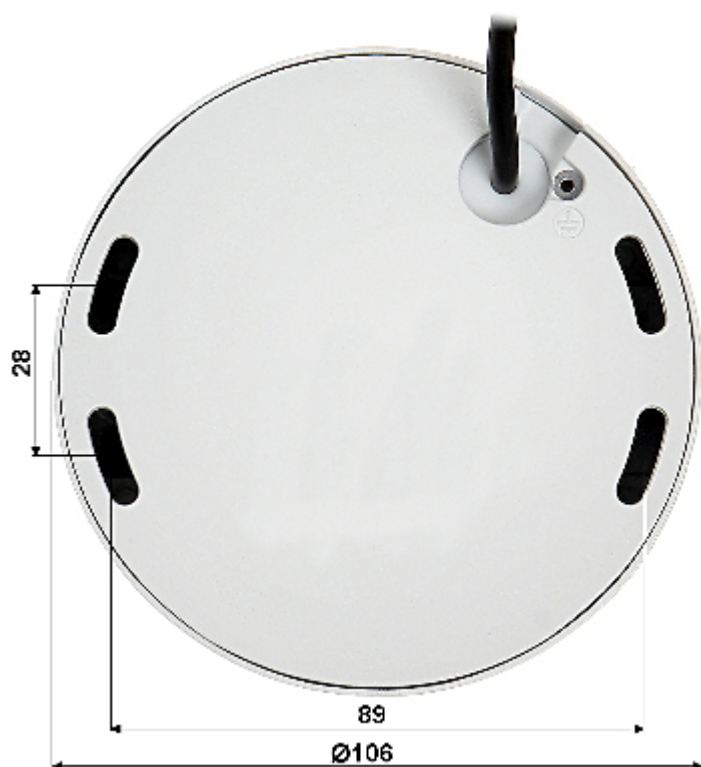

In the kit:

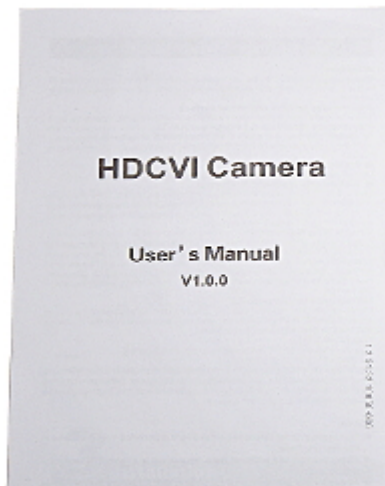

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

- The camera has a very flat profile, it's only 51 mm out from the ceiling.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

