

HD-CVI, PAL CAMERA DH-HAC-HFW2401EP-036 - 3.7 Mpx 3.6 mm DAHUANet: **111.40 EUR** Gross: **111.40 EUR**

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface).

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Attention! In 4 Mpx resolution camera works only with DAHUA recorders supporting that resolution.

**SPECIFICATION**

Standard:	HD-CVI, PAL
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4.1 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H, PAL
Lens:	3.6 mm
View angle:	• 79 ° (manufacturer data) • 77 ° (our tests result)
IR illuminator support:	ICR - Movable InfraRed filter
Video output:	• HD-CVI, 1 Vpp / 75 Ω • CVBS, 1 Vpp / 75 Ω
S/N ratio:	> 65 dB
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
OSD menu:	OSD menu available via DAHUA recorder
Main features:	• WDR - 120 dB - Wide Dynamic Range • 2D-DNR / 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ICR - Movable InfraRed filter • BLC/HLC - Back Light / High Light Compensation • AGC - Automatic Gain Control • Motion Detection - max. 4 zones • Privacy zones - max. 8 • Mirror - Mirror image • Auto White Balance
Power supply:	12 V DC / 490 mA
Power consumption:	< 5.9 W

Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.410 kg
Dimensions:	180 x 70 x 70 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:




Side view:



Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

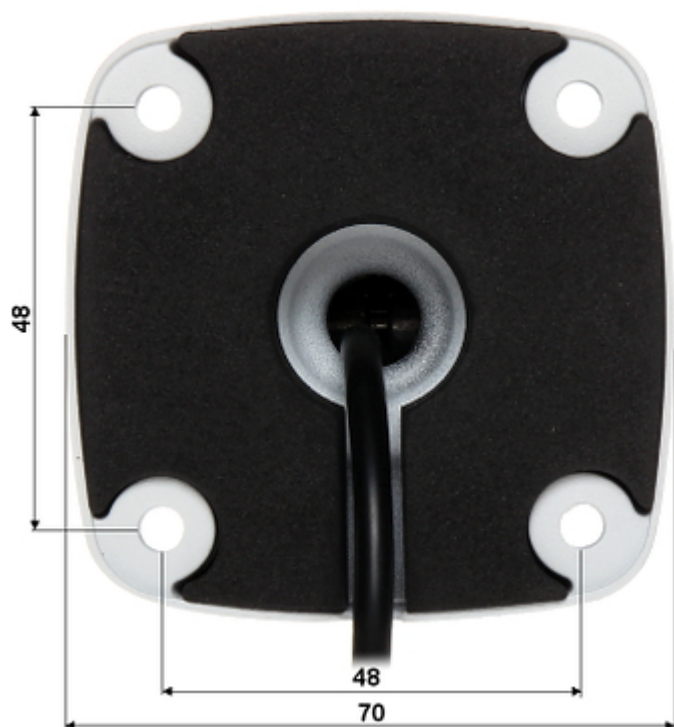

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------