

Code: HAC-HFW1400SLP-0360B

## HD-CVI CAMERA **HAC-HFW1400SLP-0360B** - 3.7 Mpx 3.6 mm DAHUA

Net: **51.54 EUR** Gross: **51.54 EUR**

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface).

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP67 Index of Protection norm.



### SPECIFICATION

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                        | HD-CVI, PAL                                                                                                                                                                                                                                                                                                                                                                                       |
| Matrix size:                     | 4.1 Mpx                                                                                                                                                                                                                                                                                                                                                                                           |
| Sensor:                          | 1/3 " Progressive Scan CMOS                                                                                                                                                                                                                                                                                                                                                                       |
| Resolution:                      | 2560 x 1440 - 3.7 Mpx ,<br>1920 x 1080 - 1080p<br>1280 x 720 - 720p<br>960 x 576 - 960H, PAL                                                                                                                                                                                                                                                                                                      |
| IR illuminator support:          | ICR - Movable InfraRed filter                                                                                                                                                                                                                                                                                                                                                                     |
| Video output:                    | HD-CVI / PAL - 1 Vpp / 75 Ω                                                                                                                                                                                                                                                                                                                                                                       |
| Lens:                            | 3.6 mm                                                                                                                                                                                                                                                                                                                                                                                            |
| View angle:                      | • 85 ° (manufacturer data)<br>• 77 ° (our tests result)                                                                                                                                                                                                                                                                                                                                           |
| S/N ratio:                       | > 65 dB                                                                                                                                                                                                                                                                                                                                                                                           |
| Range of IR illumination:        | 30 m                                                                                                                                                                                                                                                                                                                                                                                              |
| IR illuminator power adjustment: | Automatic                                                                                                                                                                                                                                                                                                                                                                                         |
| Main features:                   | <ul style="list-style-type: none"><li>• D-WDR - Wide Dynamic Range</li><li>• 2D-DNR - Digital Noise Reduction</li><li>• BLC/HLC - Back Light / High Light Compensation</li><li>• ICR - Movable InfraRed filter</li><li>• Sharpness - sharper image outlines</li><li>• AGC - Automatic Gain Control</li><li>• Privacy zones</li><li>• Mirror - Mirror image</li><li>• Auto White Balance</li></ul> |
| OSD menu:                        | OSD menu available via recorder                                                                                                                                                                                                                                                                                                                                                                   |
| Power supply:                    | 12 V DC / 380 mA                                                                                                                                                                                                                                                                                                                                                                                  |
| Power consumption:               | ≤ 4.6 W                                                                                                                                                                                                                                                                                                                                                                                           |

|                        |                                                                        |
|------------------------|------------------------------------------------------------------------|
| Housing:               | Compact, Aluminum                                                      |
| Color:                 | White                                                                  |
| "Index of Protection": | IP67                                                                   |
| Operation temp:        | -40 °C ... 60 °C                                                       |
| Weight:                | 0.23 kg                                                                |
| Dimensions:            | Ø 70 x 160 mm                                                          |
| Supported languages:   | Polish, English, French, Spanish, German, Portuguese, Russian, Italian |
| Manufacturer / Brand:  | DAHUA                                                                  |
| Guarantee:             | <b>3 years</b>                                                         |

## PRESENTATION

Front view:




Side view:




Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

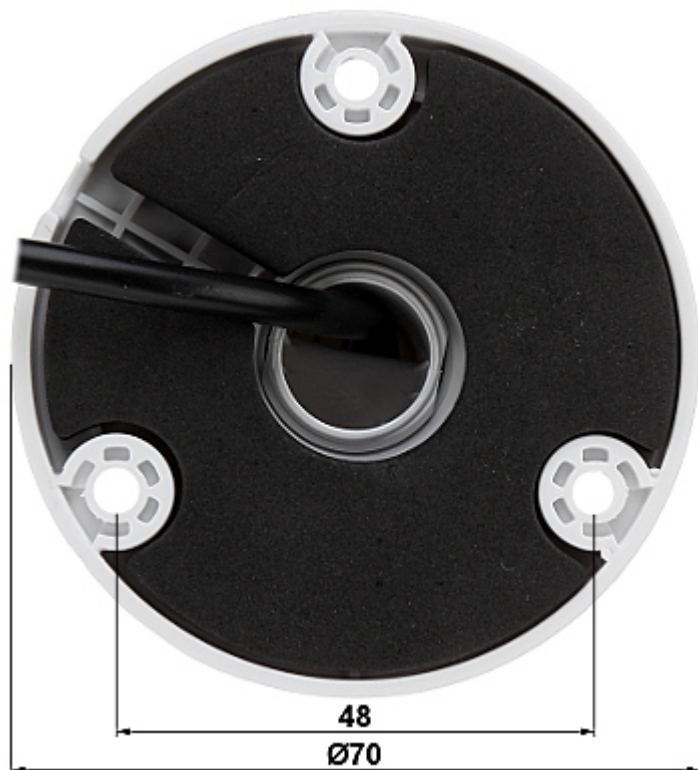

In the kit:

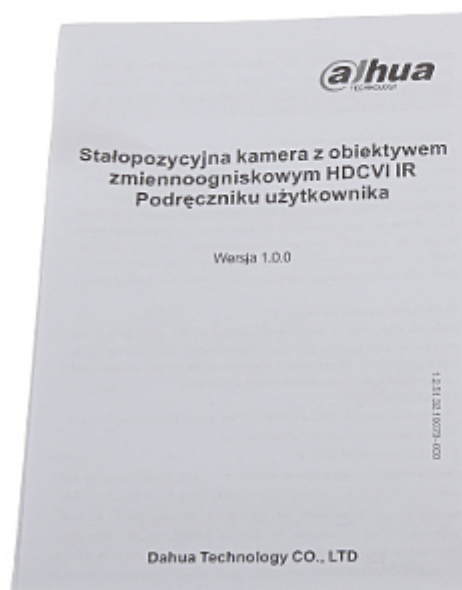

## OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



#### PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|