

Code: BCS-DMIP5201IR-AI

# IP VANDALPROOF CAMERA **BCS-DMIP5201IR-AI** - 1080p, 2.7 ... 13.5 mm - MOTOZOOM

Net: **149.40 EUR** Gross: **149.40 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p. Due to above, this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, entry gates, lounges, etc. Wide range of field of view adjustment allows to optimal set the monitoring area.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment.



## SPECIFICATION

|                           |                                                                                                                                                     |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                 | TCP/IP                                                                                                                                              |
| Sensor:                   | 1/2.8 " STARVIS™ CMOS                                                                                                                               |
| Matrix size:              | 2.1 Mpx                                                                                                                                             |
| Resolution:               | 1920 x 1080 - 1080p ,<br>1280 x 960 - 1.3 Mpx ,<br>1280 x 720 - 720p                                                                                |
| Lens:                     | 2.7 ... 13.5 mm - Motozoom                                                                                                                          |
| View angle:               | <ul style="list-style-type: none"><li>• 109 ° ... 30 ° (manufacturer data)</li><li>• 104 ° ... 31 ° (our tests result)</li></ul>                    |
| S/N ratio:                | > 50 dB                                                                                                                                             |
| Range of IR illumination: | 40 m                                                                                                                                                |
| RS-485 interface:         | —                                                                                                                                                   |
| Memory card slot:         | Micro SD memory cards up to 256GB support (possible local recording)                                                                                |
| Image compression method: | H.265+ / H.265 / H.264+ / H.264 / MJPEG                                                                                                             |
| Alarm inputs / outputs:   | 1 / 1                                                                                                                                               |
| Audio:                    | <ul style="list-style-type: none"><li>• External microphone input</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li></ul> |
| Main stream frame rate:   | 25 fps @ 1080p                                                                                                                                      |
| Network interface:        | 10/100 Base-T (RJ-45)                                                                                                                               |

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network protocols:             | HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, SNMP, QoS, UPnP, NTP, ICMP, HTTPS, IGMP, IEEE 802.1x, P2P                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| WEB Server:                    | Built-in                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Max. number of on-line users:  | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ONVIF:                         | 18.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mobile phones support:         | Port no.: 37777 or access by a cloud (P2P)<br>• Android: Free application <a href="#">DMSS</a><br>• iOS (iPhone): Free application <a href="#">DMSS</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Default IP address:            | 192.168.1.108                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Default admin user / password: | admin / -<br>The administrator password should be set at the first start                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Web browser access ports:      | 80, 37777                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| PC client access ports:        | 37777                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mobile client access ports:    | 37777                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| RTSP URL:                      | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream<br>rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Main features:                 | <ul style="list-style-type: none"> <li>• Motozoom lens</li> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 2D-DNR, 3D-DNR - Digital Noise Reduction</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• EIS - Electronic Image Stabilization</li> <li>• ICR - Movable InfraRed filter</li> <li>• White Balance - ATW/Manual</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• Motion Detection</li> <li>• Privacy zones</li> <li>• Possibility to change the resolution, quality and bit rate</li> <li>• Image rotation and mirror</li> <li>• Sharpness - sharper image outlines</li> <li>• Intelligent Image Analysis : crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, loitering detection, illegal parking, detection of people gathering, face detection</li> </ul> |
| Power supply:                  | <ul style="list-style-type: none"> <li>• ePoE,</li> <li>• PoE (802.3af),</li> <li>• 12 V DC / 980 mA,</li> <li>• 24 V AC / 490 mA</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Power consumption:             | ≤ 11.8 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Housing:                       | Dome - Metal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Color:                         | White                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| "Index of Protection":         | IP67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Vandal-proof:                  | IK10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Operation temp:                | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Weight:                        | 0.88 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Dimensions:                    | Ø 159 x 118 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Supported languages:           | Polish, English                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Manufacturer / Brand:          | BCS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Guarantee:                     | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Internal view:





Memory card slot and "Reset" button:



Mounting side view:



In the kit:



## OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

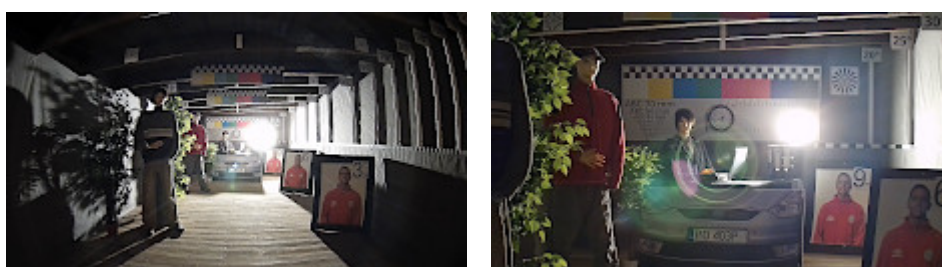

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|