

Code: DH-HAC-HFW2401RP-Z-

HD-CVI, PAL CAMERA **DH-HAC-HFW2401RP-Z** - 3.7 Mpx 2.7 ... 13.5 mm - MOTOZOOM DAHUA

Net: **166.31 EUR** Gross: **166.31 EUR**

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL. The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP67 Index of Protection norm.

Attention! At the first start-up, the camera displays the image at its maximum resolution. In 4 Mpx resolution camera works only with DAHUA recorders supporting that resolution.



SPECIFICATION

Standard:	HD-CVI, PAL
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4.1 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p , 960 x 576 - PAL
IR illuminator support:	ICR - Movable InfraRed filter
Video output:	• HD-CVI, 1 Vpp / 75 Ω • PAL, 1 Vpp / 75 Ω
OSD menu:	OSD menu available via DAHUA recorder
Lens:	2.7 ... 13.5 mm - Motozoom
View angle:	96 ° ... 25 °
S/N ratio:	> 65 dB
Range of IR illumination:	60 m
IR illuminator power adjustment:	Automatic
Main features:	• Motozoom lens • WDR - 120 dB - Wide Dynamic Range • ICR - Movable InfraRed filter • 2D-DNR / 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • BLC/HLC - Back Light / High Light Compensation • AGC - Automatic Gain Control • Privacy zones • Motion Detection • Auto White Balance

Power supply:	12 V DC / 920 mA
Power consumption:	≤ 11.1 W
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.59 kg
Dimensions:	213 x 90 x 90 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:




Side view:



Mounting side view:



In the kit:

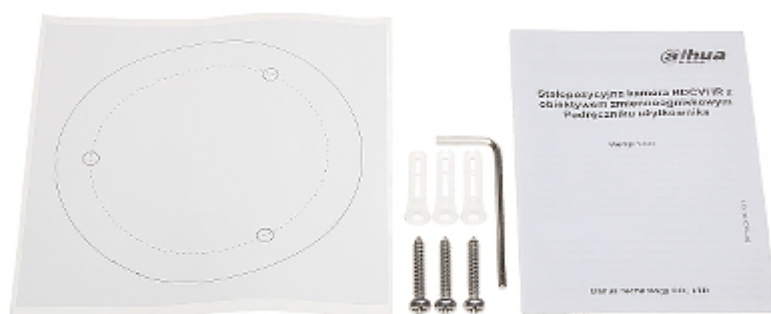

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------