

Code: APTI-AT33C62-2812W

AHD, HD-TVI CAMERA **APTI-AT33C62-2812W** - 3.0 Mpx 2.8 ... 12 mm

Net: **32.68 EUR** Gross: **32.68 EUR**

Megapixel camera with 1/3" CMOS sensor and AHD / HD-TVI.

The AHD / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 3.0 Mpx resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu.

Camera is according to IP66 Index of Protection norm.

Attention! in HD-TVI mode, the camera does not work with the HYBRO-H recorders supporting the 3 Mpx resolution.



SPECIFICATION

Standard:	AHD, HD-TVI
Sensor:	1/3 " Aptina AR0330 CMOS
Digital Image Processor:	Nextchip NVP2470H
Matrix size:	3.0 Mpx
Resolution:	2048 x 1536 - 3.0 Mpx @ AHD, HD-TVI
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 ... 12 mm, 3 Mpx
View angle:	• 81 ° ... 23 ° (manufacturer data) • 72 ° ... 28 ° (our tests result)
S/N ratio:	> 50 dB
Video output:	1 Vpp 75 Ω, AHD / HD-TVI - selectable by switch
Main features:	• ICR - Movable InfraRed filter • D-WDR - Wide Dynamic Range • DNR - Digital Noise Reduction • AGC - Automatic Gain Control • BLC/HLC - Back Light / High Light Compensation • Auto White Balance • Day/Night mode - configurable • Mirror - Mirror image • Sharpness - sharper image outlines • NRT - adjusting the number of fps for a given resolution : NRT ON: 18 fps, NRT OFF: 25 fps
OSD menu:	✓
Power supply:	12 V DC / 460 mA
Power consumption:	≤ 5.5 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-10 °C ... 50 °C
Weight:	0.61 kg
Dimensions:	287 x 100 x 89 mm
Supported languages:	English, Chinese, French, Spanish, Italian
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

Front view:



Side view:



Bottom view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Mounting side view:



The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu:

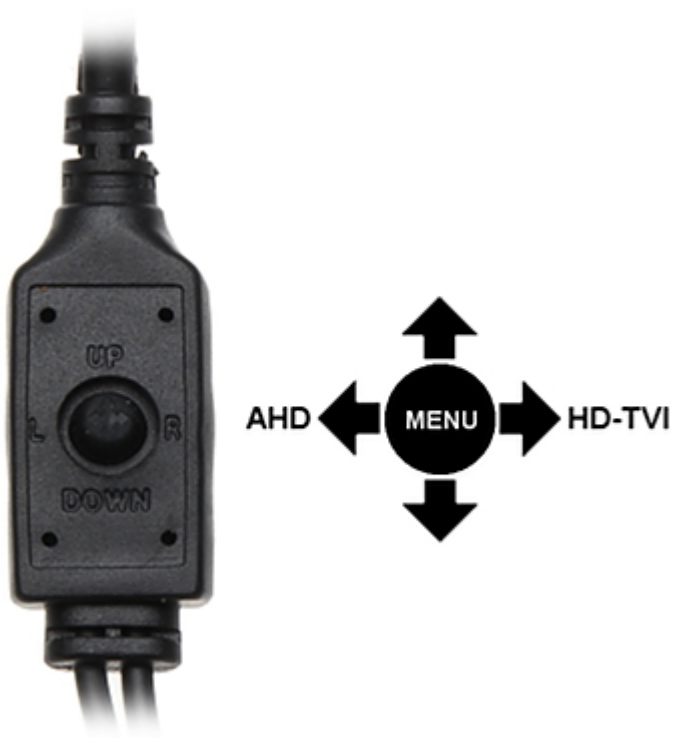


In the kit:

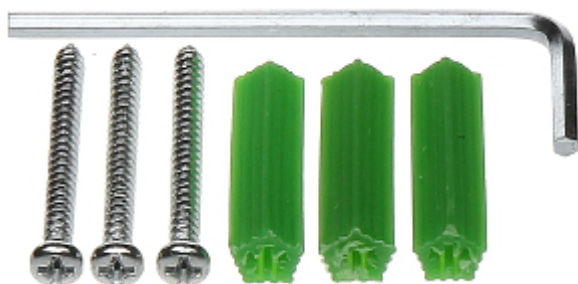

OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):

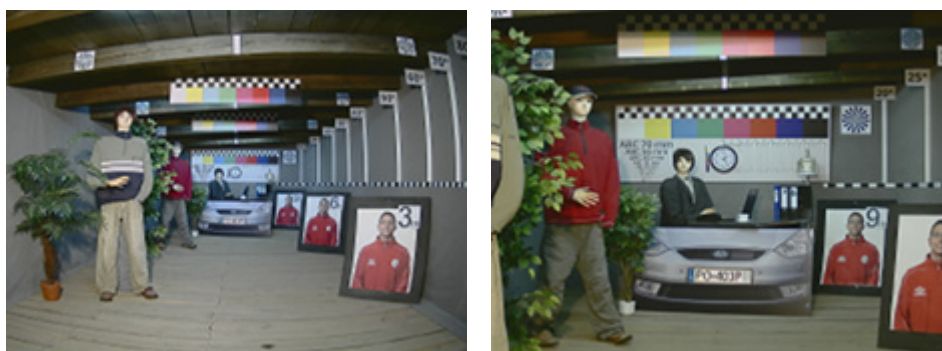

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



HD-TVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

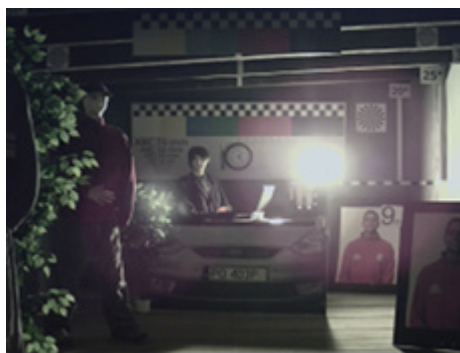

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------