

Code: GT-CH21C5-28VFW

AHD, HD-CVI, HD-TVI, PAL CAMERA **GT-CH21C5-28VFW** - 1080p 2.8 ...  
12 mm GEMINI TECHNOLOGY  
Net: 26.40 EUR Gross: 26.40 EUR

Megapixel camera with 1/2.9" Sony CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Setting the camera in PAL mode allows to obtain an image in 960H resolution. The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder.



#### SPECIFICATION

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                        | AHD, HD-CVI, HD-TVI, PAL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Sensor:                          | 1/2.9 " Sony CMOS IMX322                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Digital Image Processor:         | Nextchip NVP2441H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Matrix size:                     | 2.4 Mpx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Resolution:                      | 1920 x 1080 - 1080p, AHD-H, HD-CVI, HD-TVI ,<br>960 x 576 - 960H, PAL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Range of IR illumination:        | 50 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| IR illuminator power adjustment: | By potentiometer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Lens:                            | 2.8 ... 12 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| View angle:                      | <ul style="list-style-type: none"><li>• 83 ° ... 23 ° (manufacturer data)</li><li>• 93 ° ... 33 ° (our tests result)</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| S/N ratio:                       | > 50 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Video output:                    | 1 Vpp 75 Ω, AHD / HD-CVI / HD-TVI / PAL - selectable by switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Main features:                   | <ul style="list-style-type: none"><li>• Sense-UP - (Slow Shutter) - Increase the sensor sensitivity max. x 30</li><li>• D-WDR - Wide Dynamic Range</li><li>• 2D-DNR / 3D-DNR - Digital Noise Reduction</li><li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li><li>• ICR - Movable InfraRed filter</li><li>• Motion Detection - max. 4 zones</li><li>• Privacy zones - max. 4</li><li>• Day/Night mode (color/b&amp;w/auto)</li><li>• WB - White Balance (ATW/AWB/manual/indoor/outdoor)</li><li>• BLC - configurable Back Light Compensation</li><li>• HSBLCL - High Light Compensation (spot)</li><li>• Mirror - Mirror image</li><li>• image "freeze"</li><li>• Sharpness - sharper image outlines</li><li>• Monitor type correction - LCD/CRT</li></ul> |
| OSD menu:                        | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Power supply:                    | 12 V DC / 390 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Power consumption:     | ≤ 4.8 W                                                                                                                         |
| Housing:               | Compact - Metal                                                                                                                 |
| Color:                 | White                                                                                                                           |
| "Index of Protection": | IP66                                                                                                                            |
| Operation temp:        | -20 °C ... 60 °C                                                                                                                |
| Weight:                | 0.815 kg                                                                                                                        |
| Dimensions:            | 260 x 123 x 92 mm                                                                                                               |
| Supported languages:   | English, Chinese Traditional, Chinese Simplified, French, Spanish, Dutch, German, Polish, Portuguese, Russian, Turkish, Italian |
| Manufacturer / Brand:  | GEMINI TECHNOLOGY                                                                                                               |
| Guarantee:             | 2 years                                                                                                                         |

## PRESENTATION

Front view:




Side view:



Bottom view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

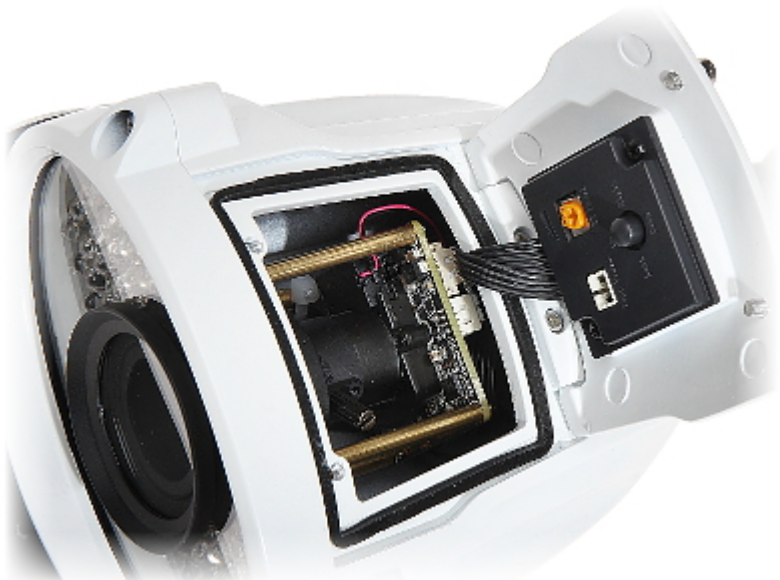

The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds, without going into the OSD menu:



Mounting side view:

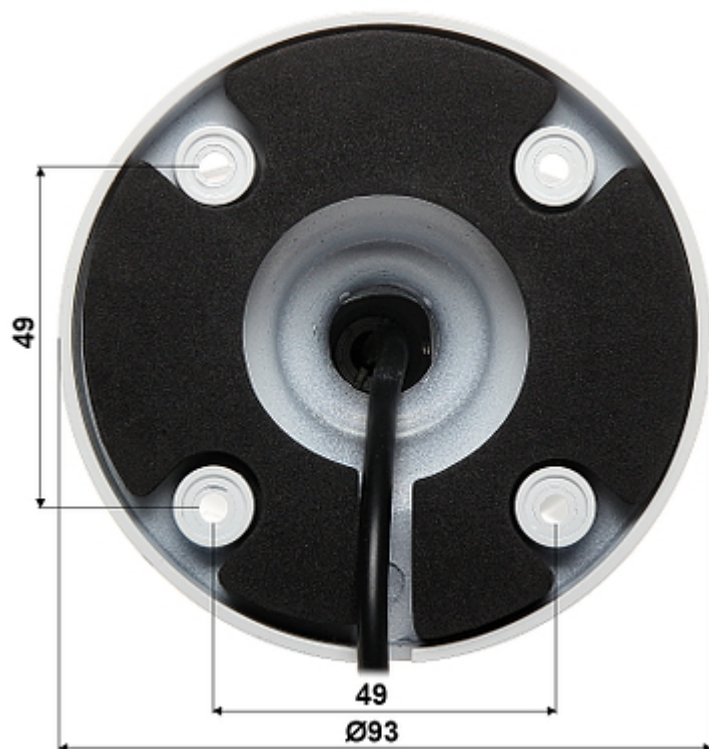

In the kit:



Package:



## OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:



HD-CVI:


Camera image at artificial illumination (about 30Lux):

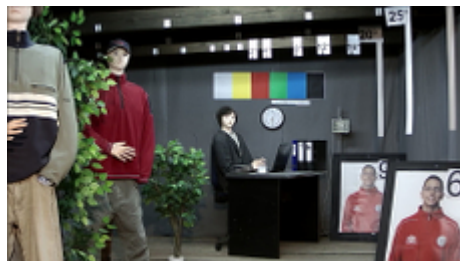

Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:

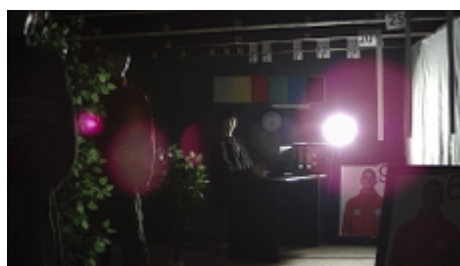

HD-TVI:


Camera image at artificial illumination (about 30Lux):

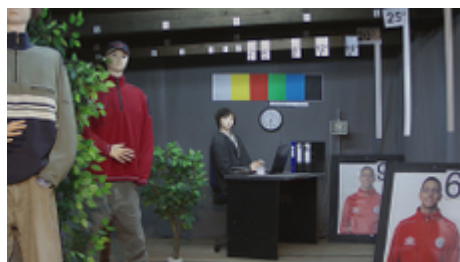

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

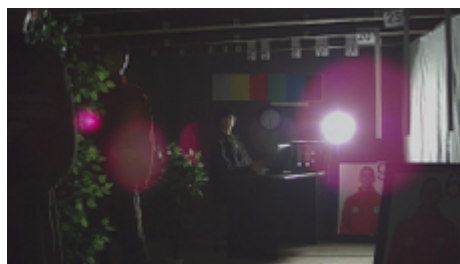

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

