

Code: LE-403405

## CIRCUIT BREAKER **LE-403405** THREE-PHASE 32 A B TYPE LEGRAND

Net: **26.28 EUR** Gross: **26.28 EUR**

Thermal-magnetic circuit breaker with B-type curve and 32A rated current. The LE-403405 circuit breaker is compatible to DIN TS-35 rail mounting system.  
Circuit breakers with B-type breaking curve are designed to protection against short-circuits and overloads of the lighting, control circuits and outlets.



### SPECIFICATION

|                           |                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device type:              | Circuit Breaker, Three-phase                                                                                                                                                                                                                                                                                                                                  |
| Rated current:            | 32 A                                                                                                                                                                                                                                                                                                                                                          |
| Number of poles:          | 3                                                                                                                                                                                                                                                                                                                                                             |
| Tripping curves:          | B type                                                                                                                                                                                                                                                                                                                                                        |
| Breaking capacity:        | 6000 A                                                                                                                                                                                                                                                                                                                                                        |
| Rated voltage:            | 400 V AC / 50 Hz                                                                                                                                                                                                                                                                                                                                              |
| Connectors type:          | screw terminals                                                                                                                                                                                                                                                                                                                                               |
| Main features:            | <ul style="list-style-type: none"><li>• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls</li><li>• No possibility of connecting the residual-current blocks</li><li>• Can be connected with using the supply busbars fork-type or prong-type</li><li>• Provided space for a label with description</li></ul> |
| Housing:                  | Plastic, DIN, TS-35 rail mounting                                                                                                                                                                                                                                                                                                                             |
| Width in 17.5 mm modules: | 3                                                                                                                                                                                                                                                                                                                                                             |
| Weight:                   | 0.4 kg                                                                                                                                                                                                                                                                                                                                                        |
| Dimensions:               | 53 x 83 x 75 mm                                                                                                                                                                                                                                                                                                                                               |
| Manufacturer / Brand:     | LEGRAND                                                                                                                                                                                                                                                                                                                                                       |
| Guarantee:                | 2 years                                                                                                                                                                                                                                                                                                                                                       |

### PRESENTATION




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Front view:




Side view:

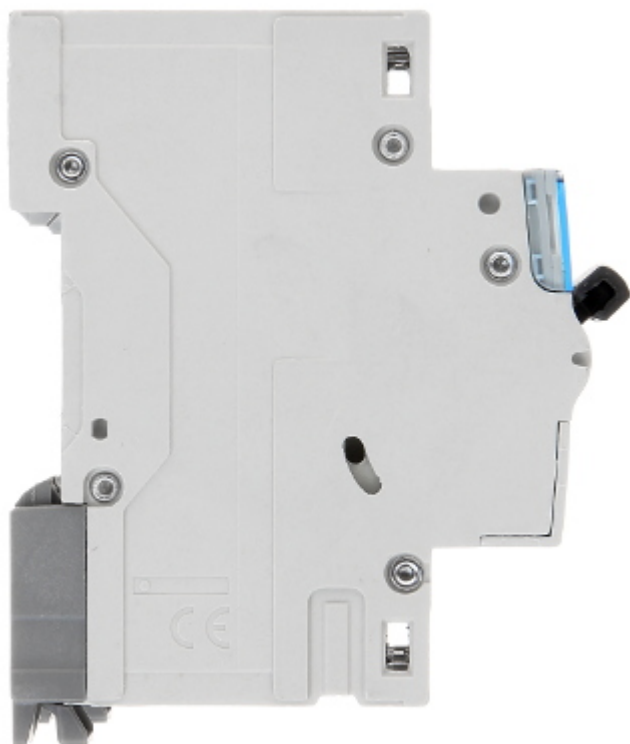


Mounting side view:

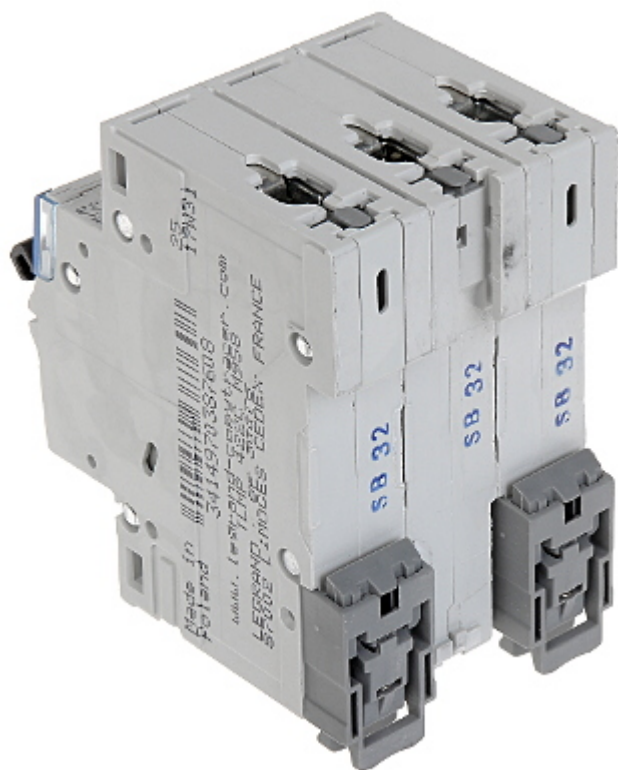

Bottom view:

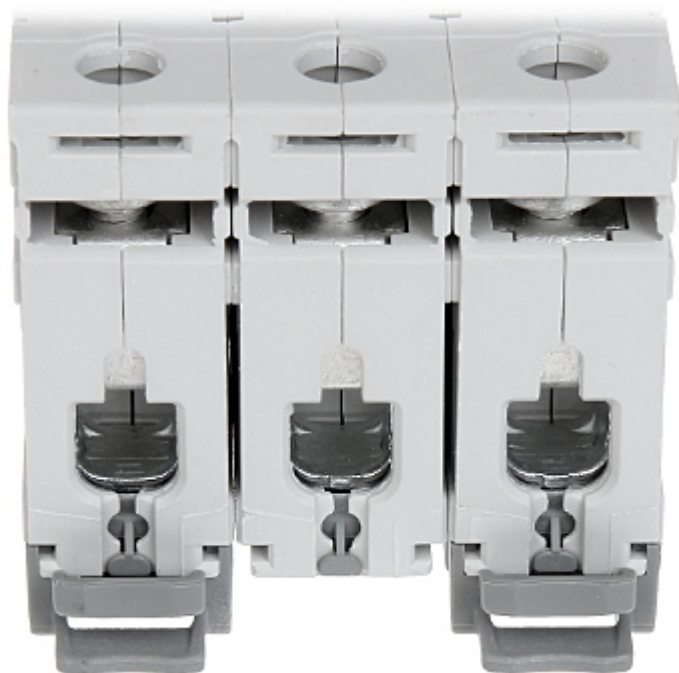

Tripping curves:

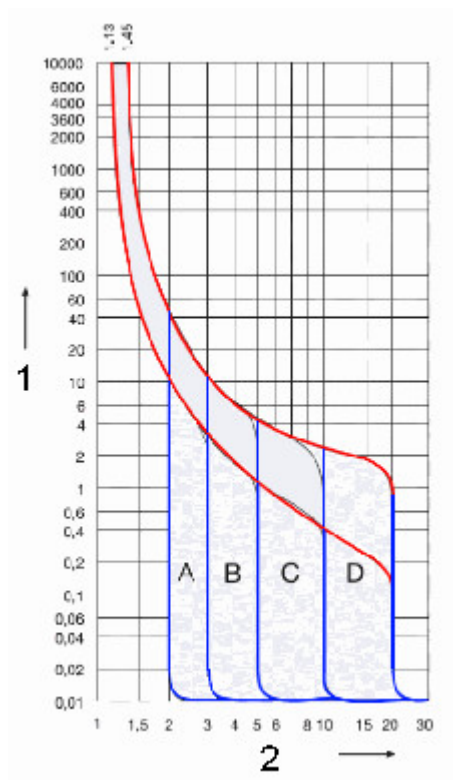

1. Tripping time (s)
2. The multiplier of the rated current

#### PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60