

Code: DS-K1T804BMF

ACCESS CONTROLLER **DS-K1T804BMF** Hikvision

Net: **195.74 EUR** Gross: **195.74 EUR**

The DS-K1T804BMF controller can operate autonomously or in the network mode. The device enables single door or read in/out access control.



SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	0 ... 4.5 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Doorbell button:	✓
Tamper output:	✓
RS-485 interface:	—
Communication:	Wiegand
Identification time:	< 1 s
Network interface:	• RJ-45 - 10/100 Base-T • Built-in Wi-Fi module
Default IP address:	192.0.0.64
Default admin user / password:	admin / -
Main features:	• Color LCD : 2.4 " , 320 x 240 px • Memory of 3000 fingerprint patterns • Memory of 3000 RFID cards • History of 100 000 events • Full support via network • Counter of the door opening time with the possibility of sending an alarm signal after exceeding the set value • Door contact and request button for exit inputs • Alarm inputs / outputs : 1 / 1 • Port USB

Power supply:	12 V DC / 1 A (power adapter included)
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
Housing:	Plastic
"Index of Protection":	—
Vandal-proof:	—
Color:	Black
Weight:	0.44 kg
Dimensions:	205 x 77 x 37 mm
SAP Code:	302918016
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION

Front view:





Rear view:






Side view (visible USB connector and RESET button):



Connectors description:



In the kit:

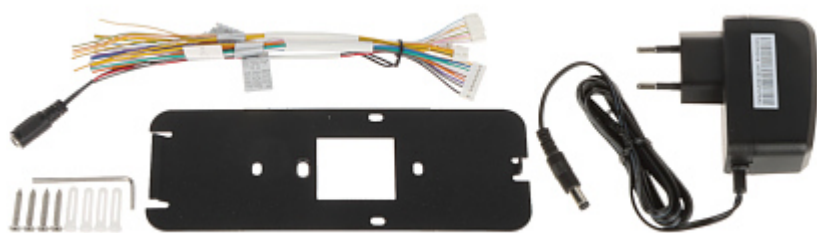

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------