

Code: DS-K1T502DBWX-C

ACCESS CONTROLLER **DS-K1T502DBWX-C** Hikvision

Net: **446.68 EUR** Gross: **446.68 EUR**

The DS-K1T502DBWX-C controller can operate autonomously or in the network mode. The device enables single door or read in/out access control. In addition, the built-in camera allows the registration of photos of people logging in and the transmission of the camera image directly to the computer managing the system.

RFID proximity reader built-in, 13.56 MHz S50 standard.



SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 3 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Doorbell button:	✓
Battery backup support:	—
Tamper output:	✓
Input lines:	2
Output lines:	1
Communication:	• RS-485, • Wiegand (data output only), • LAN, • Bluetooth
Network interface:	• RJ-45 - 10/100 Base-T • Built-in Wi-Fi module
Default IP address:	192.0.0.64
Default admin user / password:	admin / -
Power supply:	12 V ... 24 V DC
Maximal current consumption:	1 A

Main features:	• Built-in camera 2 Mpx, Camera view angle 110 ° • Possibility to control the door from the Hik-Connect mobile application • 100000 indexed users • micro SD Memory Card Reader • Bi-directional audio streaming support - SIP 2.0 protocol • Buzzer • LED indication • White button illumination • Support for door contact and exit button • NO/NC output
Operation temp:	-40 °C ... 70 °C
"Index of Protection":	IP65
IK rating:	IK09
Housing:	Metal + Plastic
Color:	Silver
Weight:	0.65 kg
Dimensions:	177 x 81 x 24 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302918805
Guarantee:	3 years

PRESENTATION

Front panel:




Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors description:

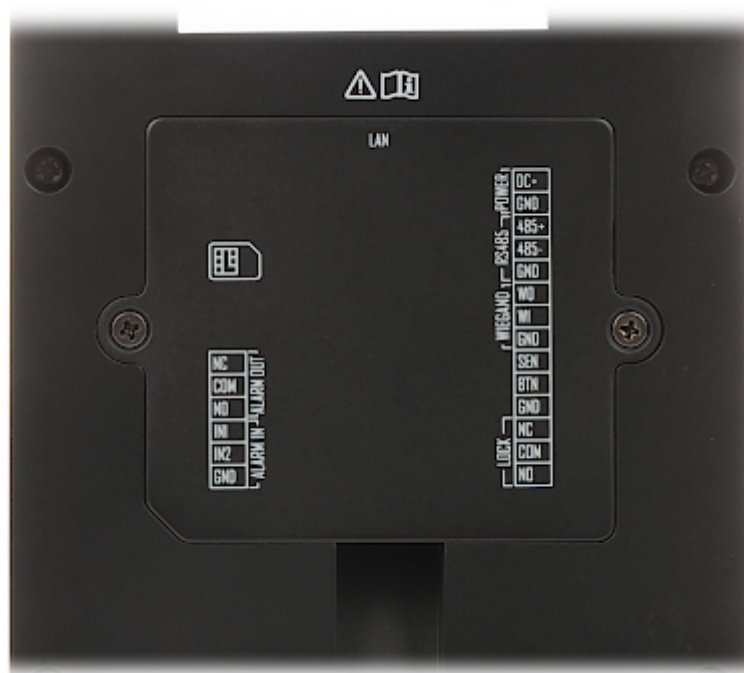


View after open the cover:



Connectors description:

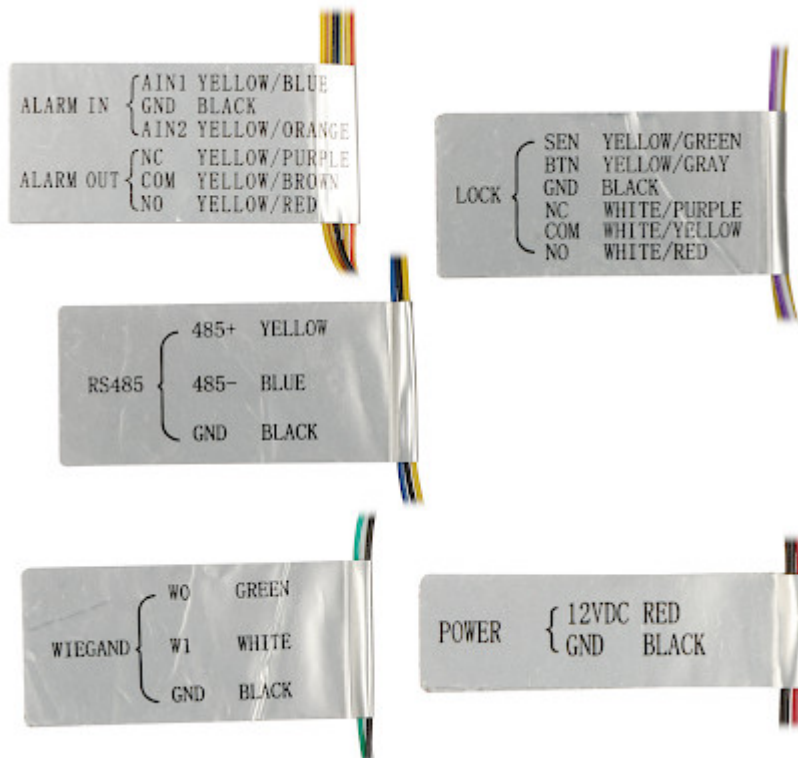

In the kit:

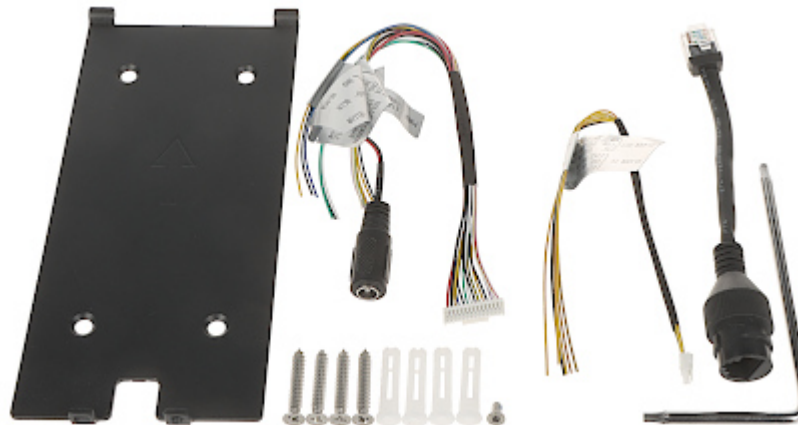

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

