

Code: ASC1202C-D

ACCESS CONTROLLER **ASC1202C-D** DAHUA

Net: **429.74 EUR** Gross: **429.74 EUR**

The ASC1202C-D controller is intended to use in access control systems based on electrical control of door opening.




SPECIFICATION

Number of served transitions:	2 (two-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	8 pcs
Output lines:	4 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand
Power supply:	100 ... 240 V AC
Main features:	• Support for 2 doors (8 inputs: 2x door sensor, 2x exit button, 4x alarm line) • 100000 indexed users • History of 150000 events • 128 General Purpose Schedules • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Door Left Open and Door Forced Open alarms • Tamper detection - opening the enclosure • Watchdog built-in • Remote programming from PC • Metal housing
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)


Weight:	2.33 kg
Dimensions:	280 x 320 x 115 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:

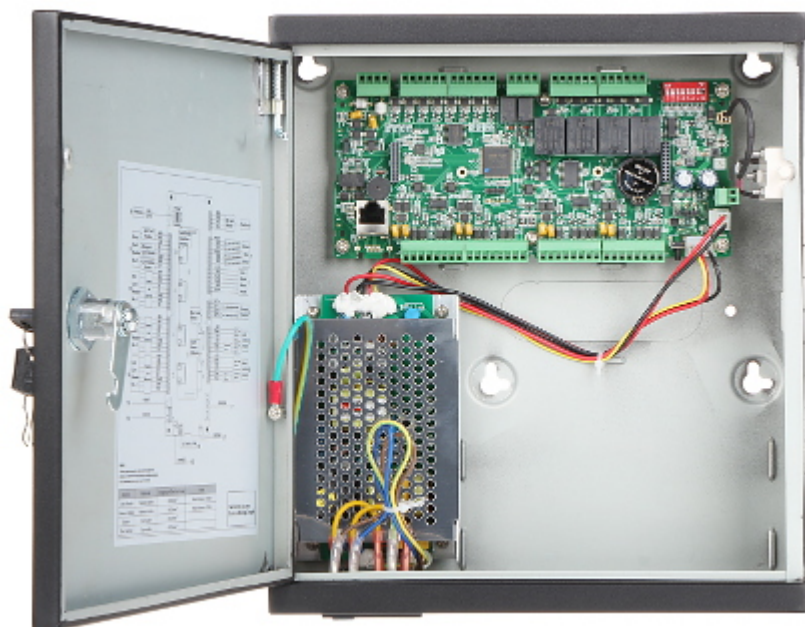

Internal view of the housing:

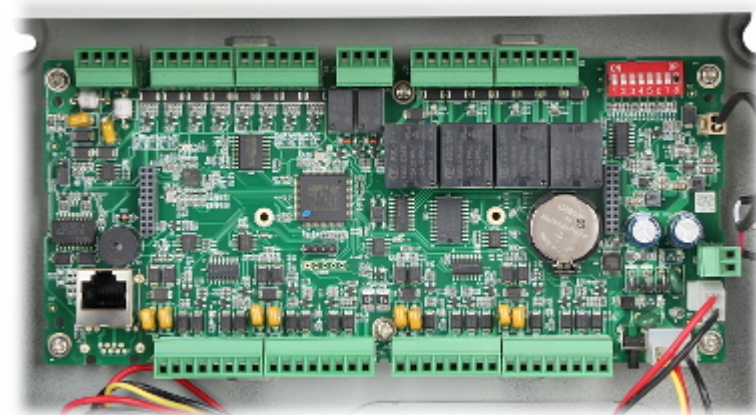

Bottom view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Mounting side view:






Dimensions:

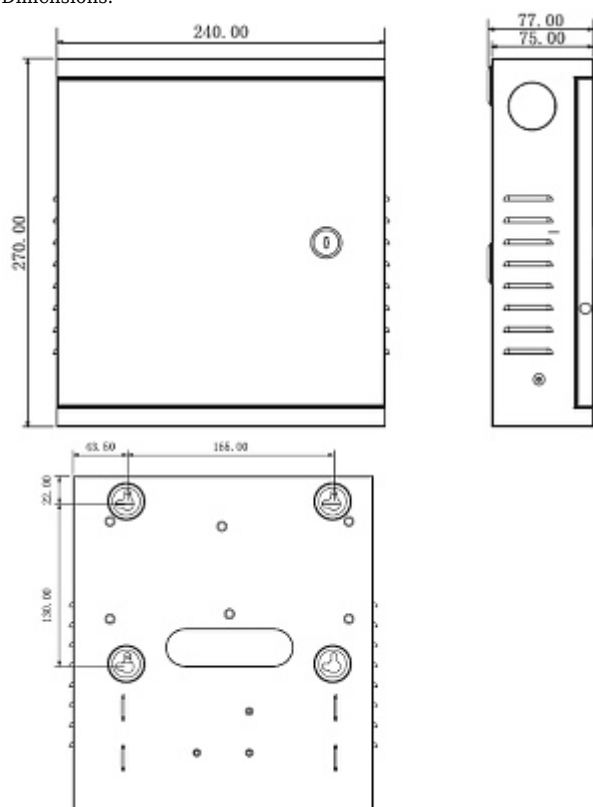

In the kit:

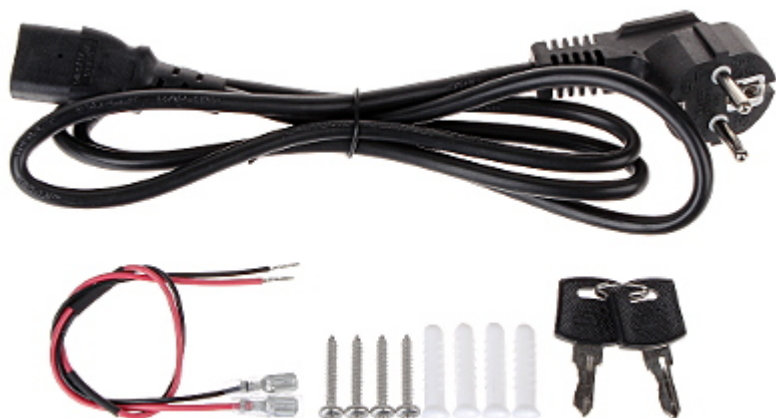

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------