

Code: ASC2204C-H

ACCESS CONTROLLER **ASC2204C-H** DAHUA

Net: **759.18 EUR** Gross: **759.18 EUR**

The ASC2204C-H controller is intended to use in access control systems based on electrical control of door opening.




SPECIFICATION

Number of served transitions:	4 (one-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	20 pcs
Output lines:	12 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand 34/26
Power supply:	80 ... 260 V AC
Main features:	• Support for 4 doors (20 inputs: 4x lock state, 4x door sensor, 4x exit button, 8x alarm line) • 200000 indexed users • History of 150000 events • Possibility to connecting in cascade • 128 General Purpose Schedules • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Door Left Open and Door Forced Open alarms • Tamper detection - opening the enclosure • Watchdog built-in • Remote programming from PC • Real time clock with battery backup • Metal housing • ONVIF compliance


Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	2.77 kg
Dimensions:	270 x 330 x 90 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:

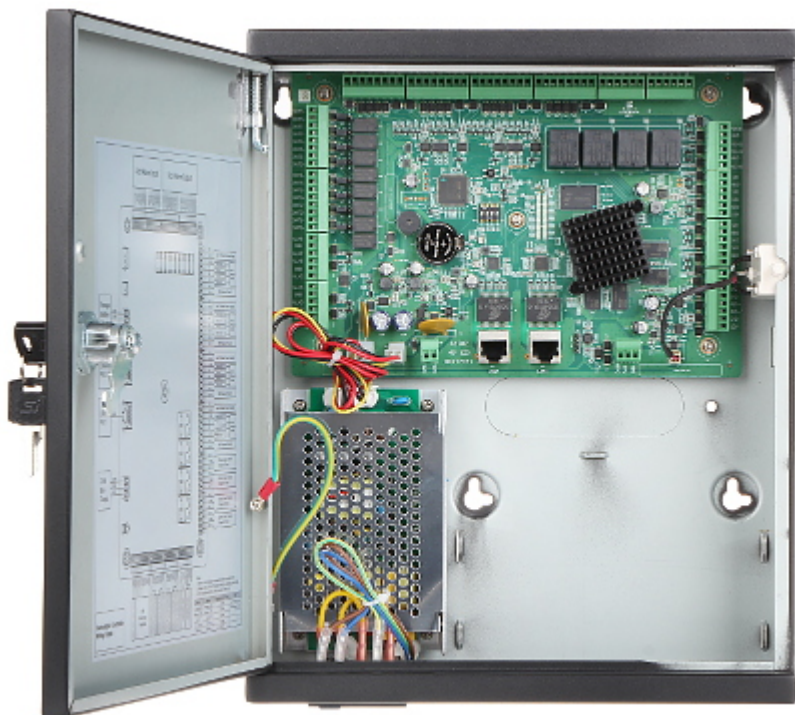

Internal view of the housing:

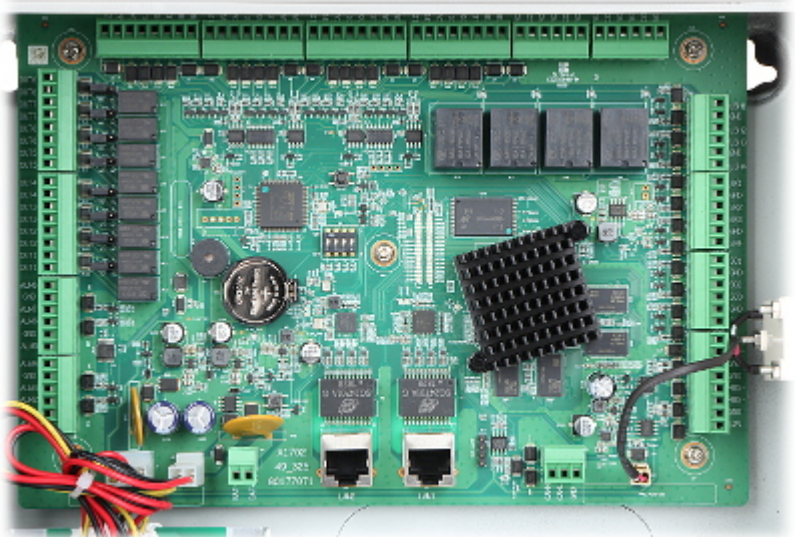

Bottom view:



Side view:




Mounting side view:






Dimensions:

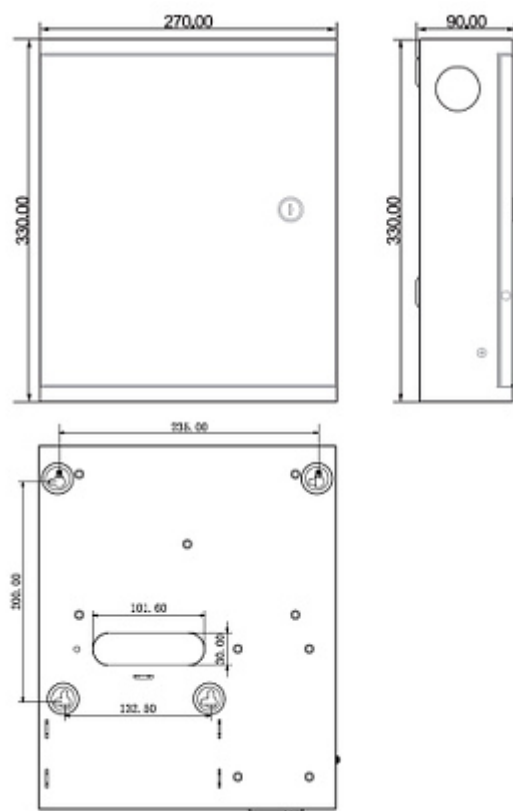

In the kit:

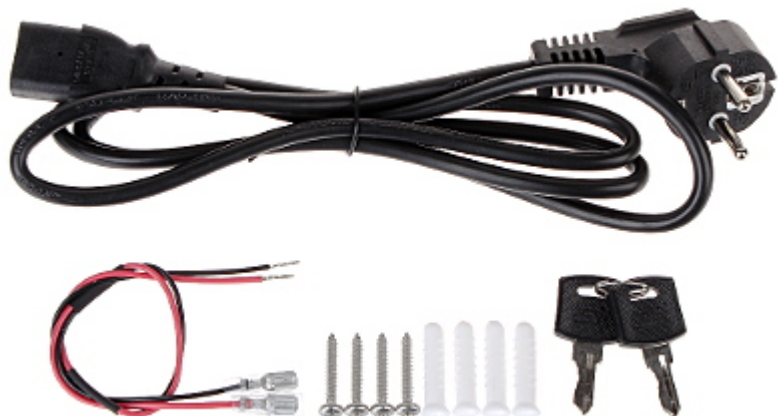

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------