


Code: ASC2102B-T

## ACCESS CONTROLLER **ASC2102B-T** DAHUA

Net: **173.27 EUR** Gross: **173.27 EUR**

The ASC2102B-T controller is intended to use in access control systems based on electrical control of door opening. The device is used to extend the capabilities of a system based on the ASC2204C-H central controller. The controller works in the SLAVE mode and requires a connection to the controller in the MASTER mode using the CAN (Controller Area Network) bus.

Up to 16 SLAVE controllers can be connected to the MASTER controller. The ASC2102B-T device address in the system is set using dedicated DIP switches.

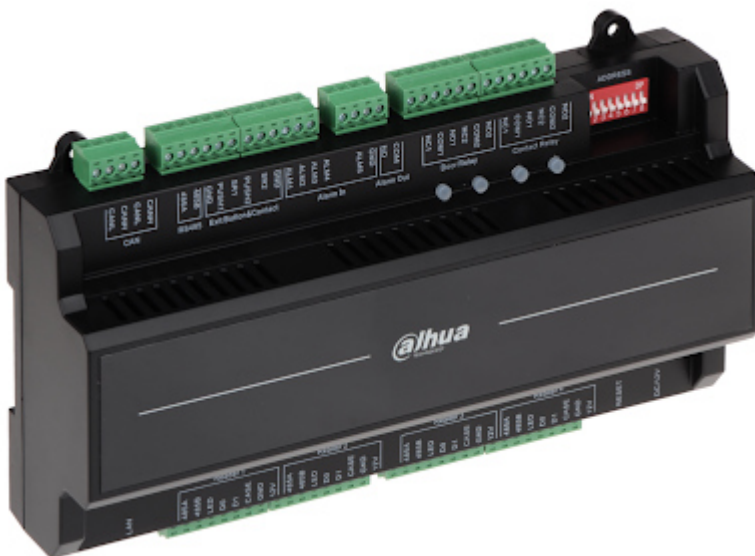


### SPECIFICATION

|                                |                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of served transitions:  | 2 (two-way)                                                                                                                                                                                                                                                                                                                                                      |
| Support:                       | DAHUA ASC2204C-H                                                                                                                                                                                                                                                                                                                                                 |
| Number of supported readers:   | 4 pcs                                                                                                                                                                                                                                                                                                                                                            |
| Battery backup support:        | —                                                                                                                                                                                                                                                                                                                                                                |
| Output lines:                  | 5 pcs - Relay                                                                                                                                                                                                                                                                                                                                                    |
| Alarm inputs / outputs:        | 5 / 1                                                                                                                                                                                                                                                                                                                                                            |
| Communication:                 | <ul style="list-style-type: none"><li>• RS-485,</li><li>• Wiegand 34/26,</li><li>• Control panel CAN (Controller Area Network)</li></ul>                                                                                                                                                                                                                         |
| Power supply:                  | 12 V DC / 1 A                                                                                                                                                                                                                                                                                                                                                    |
| Main features:                 | <ul style="list-style-type: none"><li>• 20 000 indexed users</li><li>• History of 30 000 events</li><li>• Function to prevent of multiple use of the same code/card to gain access (anti-passback)</li><li>• Door Left Open and Door Forced Open alarms</li><li>• Watchdog built-in</li><li>• Possibility to mount on a wall, or on the DIN TS-35 rail</li></ul> |
| Operation temp:                | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                 |
| Permissible relative humidity: | max. 95 % (non-condensing)                                                                                                                                                                                                                                                                                                                                       |
| Weight:                        | 0.384 kg                                                                                                                                                                                                                                                                                                                                                         |
| Dimensions:                    | 209 x 117 x 51 mm                                                                                                                                                                                                                                                                                                                                                |
| Manufacturer / Brand:          | DAHUA                                                                                                                                                                                                                                                                                                                                                            |
| Guarantee:                     | <b>3 years</b>                                                                                                                                                                                                                                                                                                                                                   |

### PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

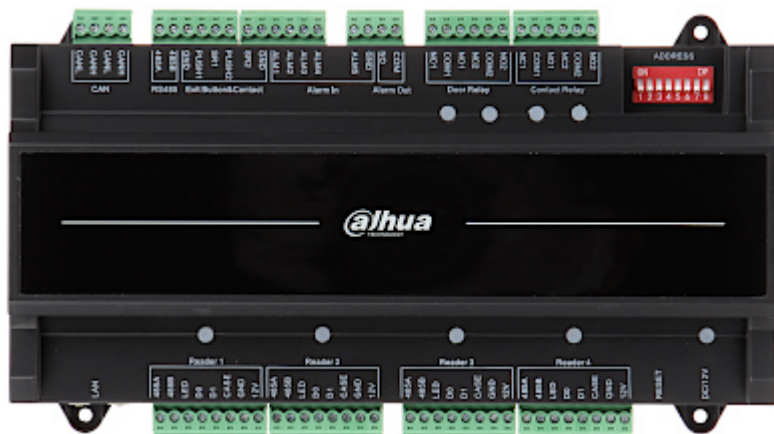

Device connectors:



Mounting side view:

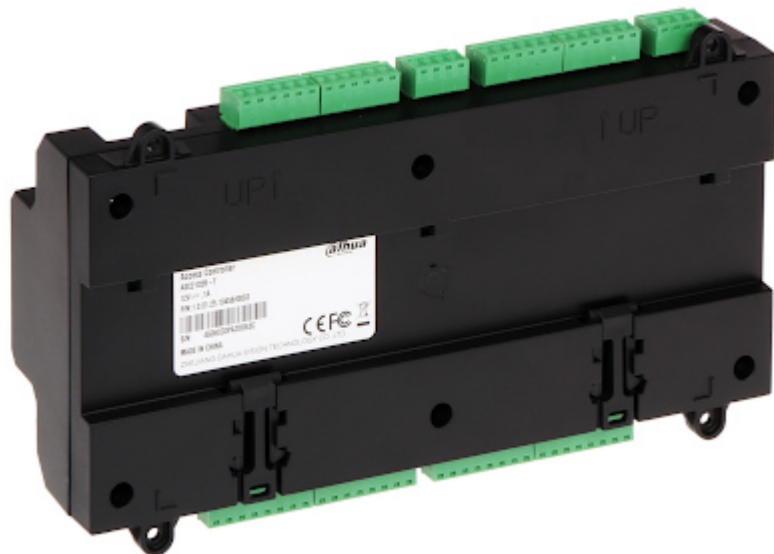

In the kit:



#### PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

