

Code: ASC1208C-S

ACCESS CONTROLLER **ASC1208C-S** DAHUA

Net: **492.30 EUR** Gross: **492.30 EUR**

The ASC1208C-S controller is intended to use in access control systems based on electrical control of door opening.



SPECIFICATION



Number of supported readers:	8 pcs
Battery backup support:	max. 7 Ah
Input lines:	20 pcs
Output lines:	12 pcs (8 pcs - Relay)
Communication:	• RS-485, • Ethernet, • Wiegand
Power supply:	230 V AC
Main features:	• 100000 indexed users • History of 150000 events • Remote programming from PC • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Door Left Open and Door Forced Open alarms • Tamper detection - opening the enclosure • Metal housing
Default IP address:	192.168.0.2
Default admin user / password:	admin / 123456
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	2.64 kg
Dimensions:	330 x 270 x 85 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Internal view of the housing:

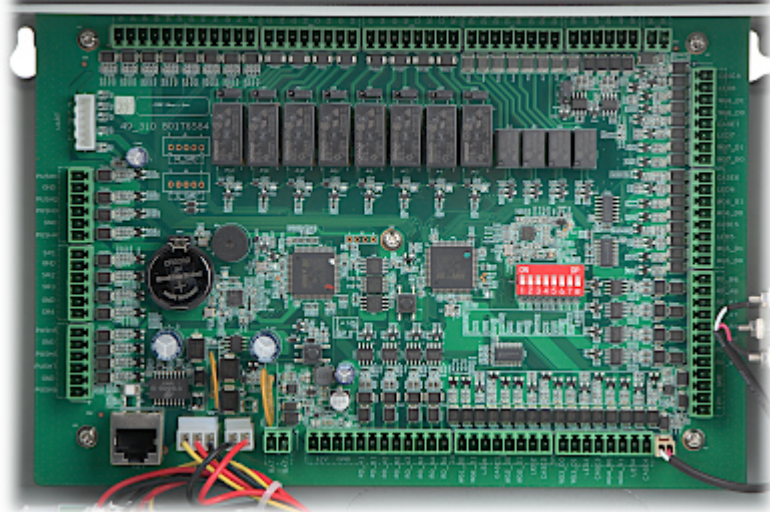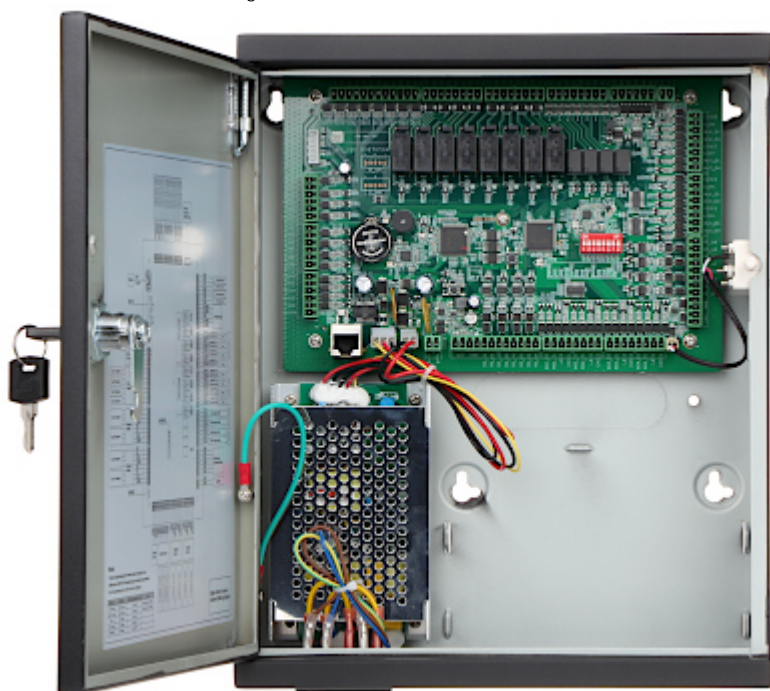

Bottom view:



Side view:




Mounting side view:





In the kit:

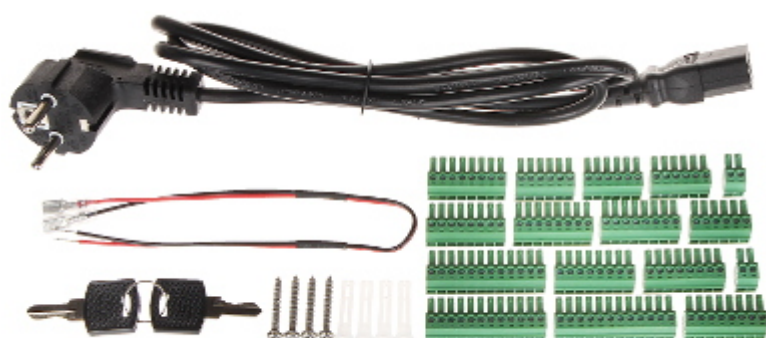

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------