

Code: ASI7223X-A

ACCESS CONTROLLER **ASI7223X-A** - 1080p DAHUA

Net: **1 419.87 EUR** Gross: **1 419.87 EUR**



Access controller with face recognition function.

With face recognition algorithm, the access controller can recognize more than 360 positions on human face.

SPECIFICATION

Sensor:	1/2.8 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
General information:	
Standard:	TCP/IP
Range of IR illumination:	5 m
White light LED illuminator range:	5 m
Temperature measurement:	—
Face recognition distance:	0.3 m ... 2.0 m (max 100 000 faces in the database)
RFID proximity reader built-in:	13.56 MHz S50
Internal memory:	Support storage of 300 000 records
Video output:	—
RS-485 interface:	✓
RS-232 interface:	✓
Wiegand interface:	✓
USB:	2 x USB 2.0
Memory card slot:	—

Alarm inputs / outputs:	1 / 1 - Relay output
Audio:	Speaker built-in
Network interface:	• 1 x 10/100 Base-T (RJ-45) • 1 x 10/100/1000 Base-T (RJ-45)
Network protocols:	IPv4, RTSP, RTP, TCP, UDP, P2P
WEB Server:	Built-in
ONVIF:	✓
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Main features:	• Built-in LCD display showing the image from the video camera - 7 " capacitive touch screen, 1024 x 600 px • Identification modes : PIN, Proximity identifier 13.56 MHz S50, Face recognition, Any combination of the above • Wiegand 34/26 • WDR - 120 dB - Wide Dynamic Range • LED indication • Buzzer for acoustic signaling of some system events • AGC - Automatic Gain Control • Sharpness - sharper image outlines • Day/Night mode (color/b&w/auto) • RESET button
Power supply:	12 V DC / 2 A (power adapter included)
Power consumption:	≤ 24 W
Housing:	Aluminum + Tempered glass
Color:	Black + Silver
"Index of Protection":	IP65 (after additional sealing the housing connection with the mounting surface, e.g. with silicone)
Operation temp:	-30 °C ... 60 °C
Weight:	3 kg
Dimensions:	428 x 129 x 99 mm
Montage hole diameter:	37 mm
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:



Dimensions:

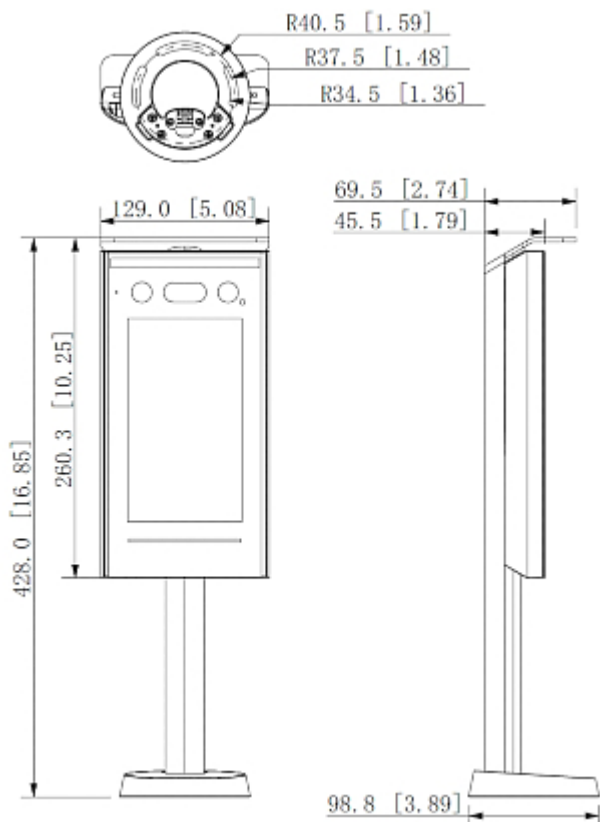

Example of application:



1. System management center
2. Switch
3. Remote client
4. Controlled passage (door/gate/wicket)
5. Electromagnetic Lock
6. Door/gate opening button
7. Reader with keypad
8. Signaling device

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

