

Code: DS-K2604T

ACCESS CONTROLLER **DS-K2604T** Hikvision

Net: **770.32 EUR** Gross: **770.32 EUR**

The DS-K2604T controller is intended to use in access control systems based on electrical control of door opening.



SPECIFICATION

Number of supported readers:	• 8 pcs @ RS-485, • 4 pcs @ Wiegand
Battery backup support:	max. 7 Ah
Input lines:	4 pcs - Alarm inputs , 4 pcs - Reed switch , 4 pcs - Door/gate opening button , 9 pcs - Tamper
Output lines:	4 pcs - Lock relay , 4 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand (w26 / w34), • Open Supervised Device Protocol (OSDP)
Power supply:	230 V AC
Main features:	• 100000 indexed users • History of 300000 events • Remote programming from PC • Metal housing
Operation temp:	-20 °C ... 65 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	4.7 kg
Dimensions:	373 x 345 x 98 mm
Manufacturer / Brand:	Hikvision



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

SAP Code:	302913800
Guarantee:	3 years


PRESENTATION

Front view:






Mounting side view:



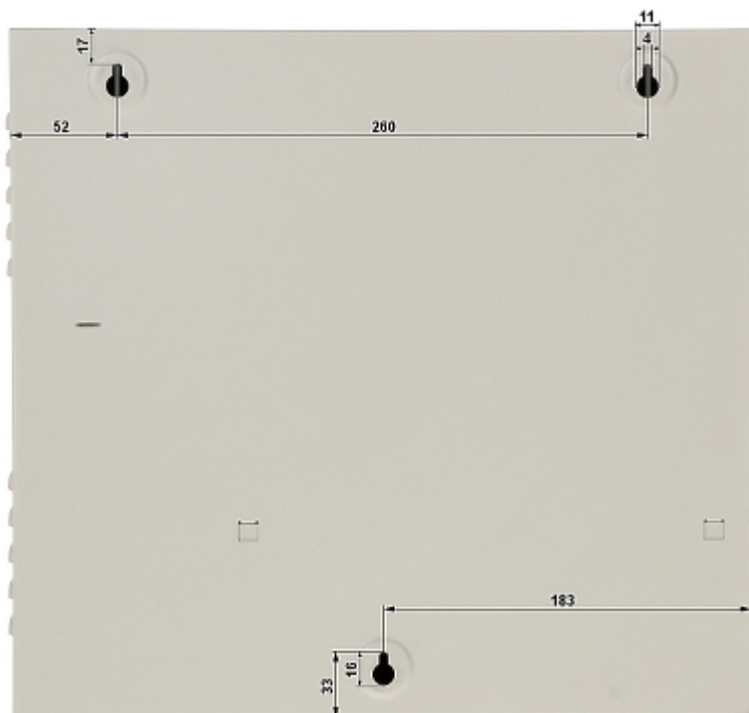


Internal view of the housing:

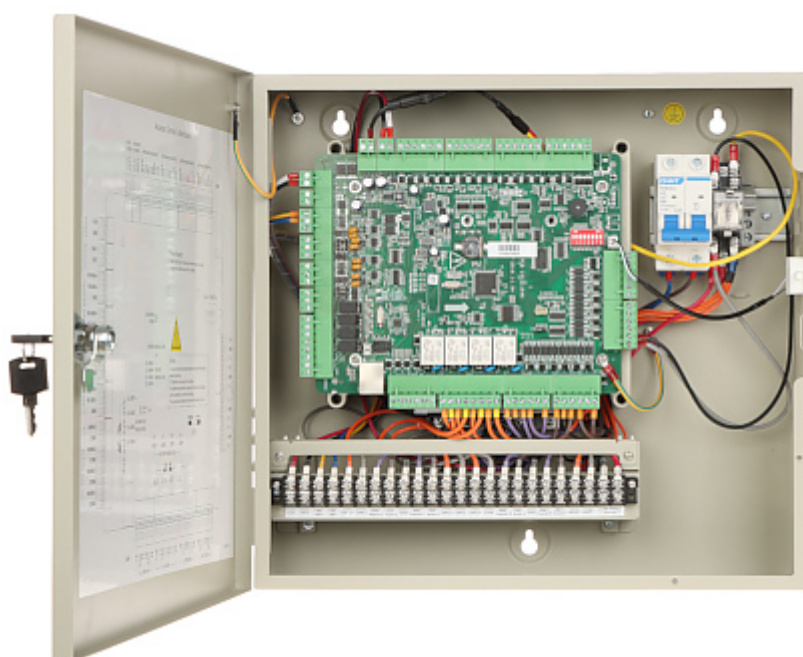

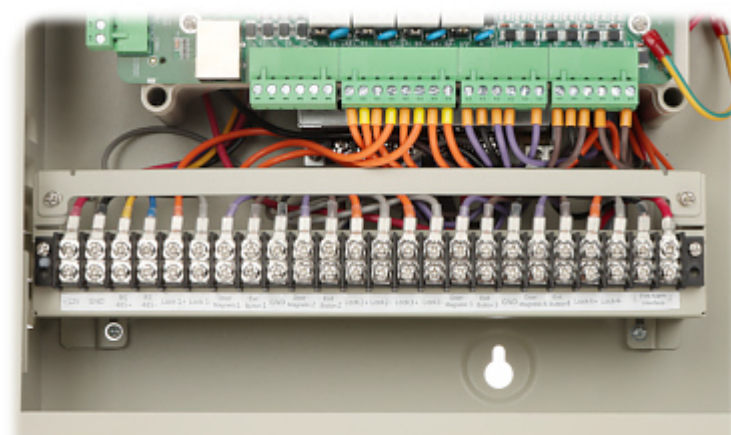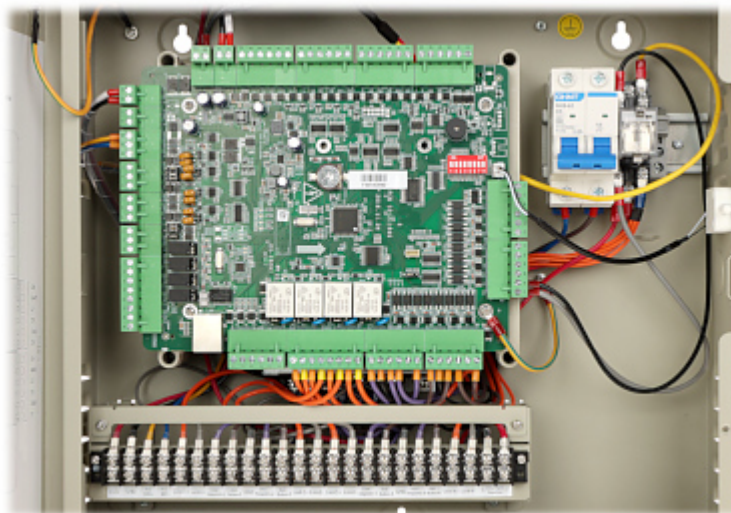


Connectors description:

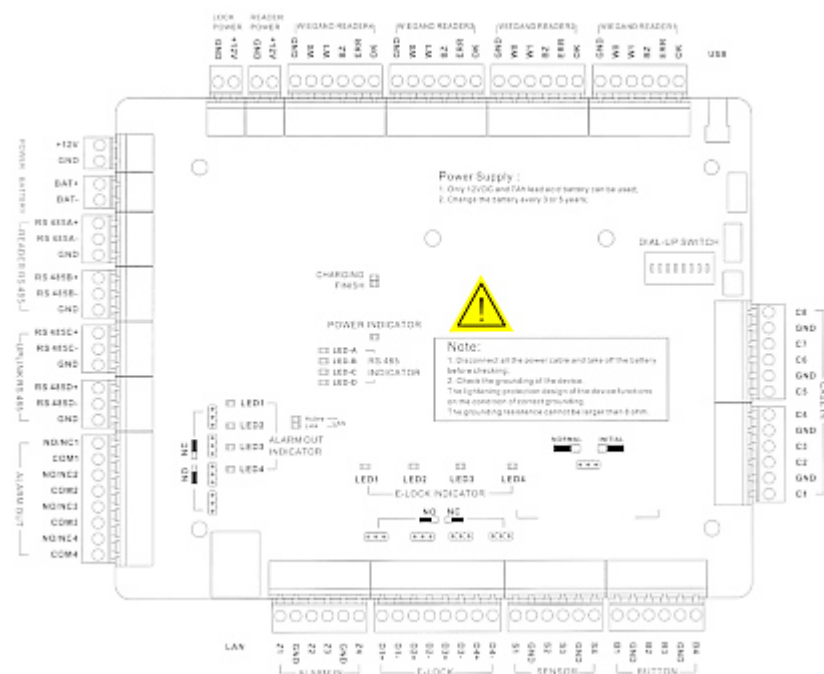


Dimensions:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta.opti@delta.poznan.pl; tel: +(48) 61 864 69 60

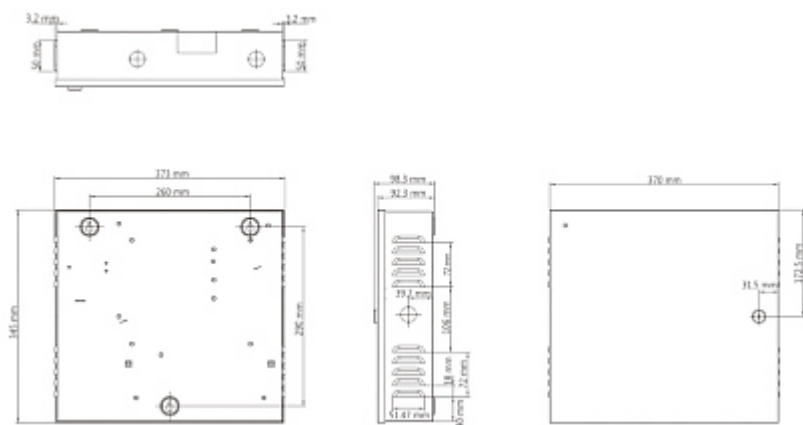

In the kit:

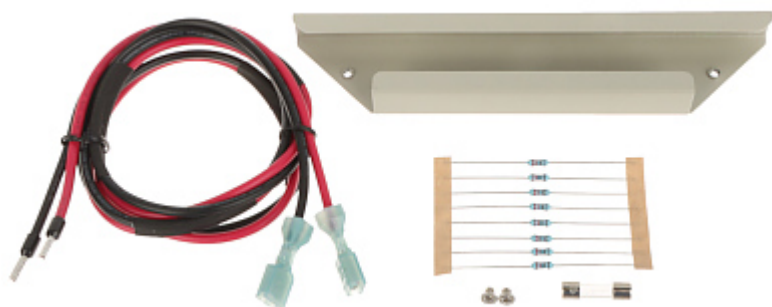

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------