


ACCESS CONTROLLER **ASC2202B-S** DAHUA

Net: 211.99 EUR Gross: 211.99 EUR

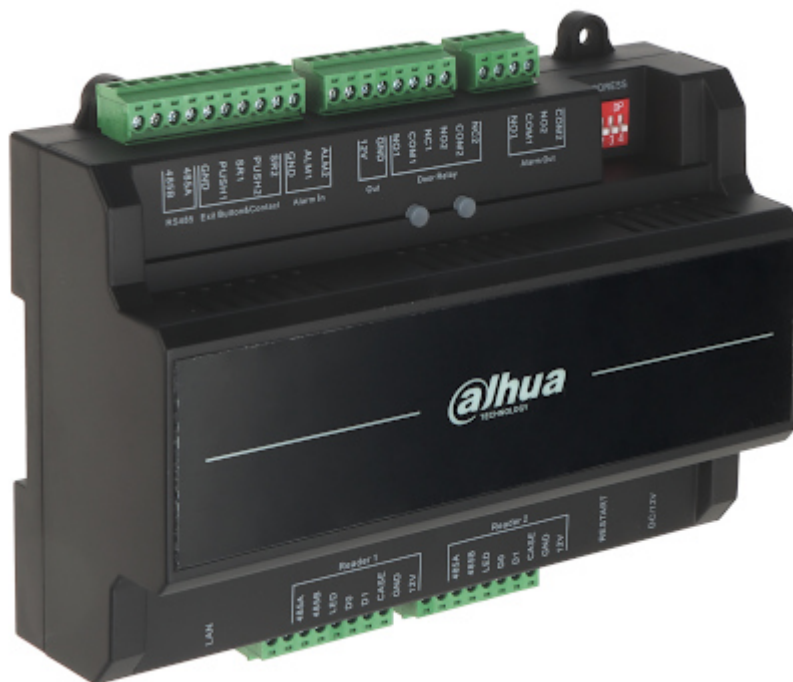

The ASC2202B-S controller is intended to use in access control systems based on electrical control of door opening.

SPECIFICATION


Number of served transitions:	2 (one-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	—
Output lines:	2 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand
Power supply:	• PoE (802.3at), • 12 V DC / 4 A
Main features:	• 100000 indexed users • History of 500000 events • Remote programming from PC • Function of protection against multiple use of the same card for access (anti-passback) • Counter of the door opening time with the possibility of sending an alarm signal after exceeding the set value • Automatic sending of alarm messages to the SmartPSS system or after entering a code, card or fingerprint defined as door opening under duress • Possibility to mount on a wall, or on the DIN TS-35 rail
Default IP address:	192.168.0.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	5 % ... 90 % (non-condensing)
Weight:	0.27 kg



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	155 x 116 x 50 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

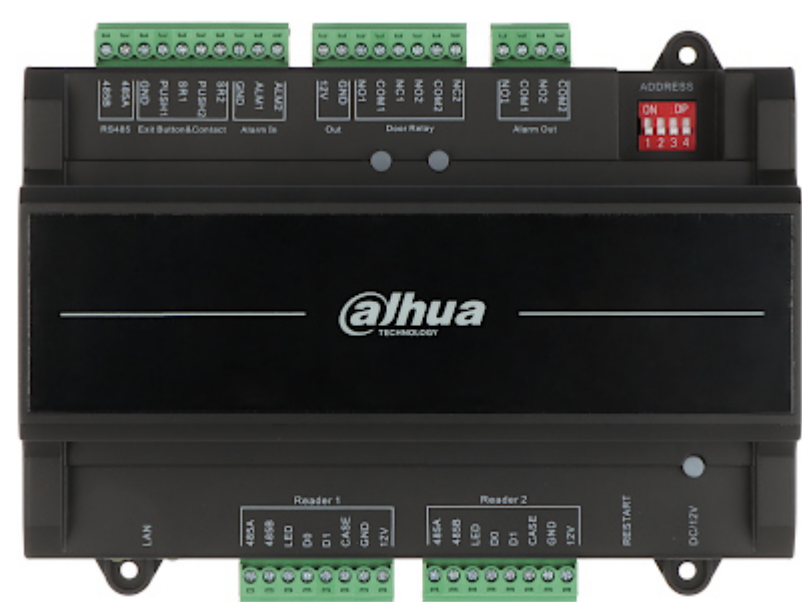


Device connectors:





Mounting side view:

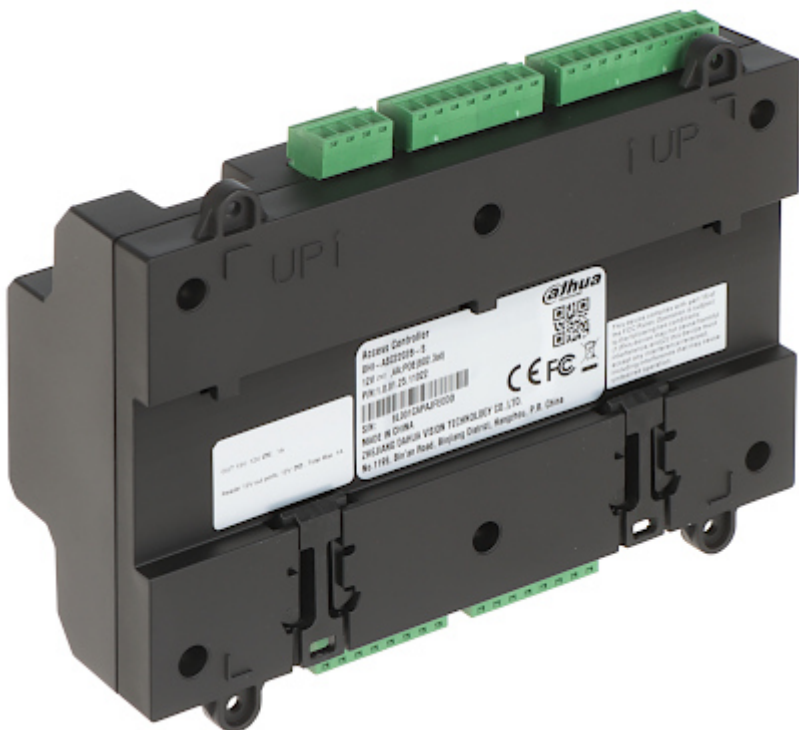

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60