

Code: MC16-PAC-EX-8

ACCESS CONTROLLER MODULE **MC16-PAC-EX-8** ROGER

Net: 1 559.80 EUR Gross: 1 559.80 EUR

The MC16-PAC-EX-8 controller is a multifunctional electronic module, intended for use in the RACS 5 v2 system, which enables the implementation of access control of the transition and building automation.

Attention! The pre-installed license includes functionality relating to control of the 8 transitions and building automation.




SPECIFICATION

Number of served transitions:	8
Inputs:	48
Outputs:	32
Number of users:	max. 12000 - Number of identifiers
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Number of permissions per ID:	100
Buffer memory:	8 000 000 events buffer
MCT readers support:	16 pcs
Readers connections:	4 pcs - Wiegand / PRT
Number of login points:	16
Number of access terminals:	32
Number of access zones:	16
Number of alarm zones:	16
Number of automation nodes:	16
Battery backup support:	12 V / 7 Ah
Communication:	• Ethernet - RJ-45 socket • RS-485 interface • RACS 5 v2 (Roger)
Main features:	• Integrated support in VISO EX software • Functions in the VISO EX system: - MSSQL database - work in distributed systems - multi-station work - monitoring of transitions with video preview - T&A event reporting - maximum number of transitions in the system - unlimited - division of the system into partitions operated by independent operators - tool for integration with RACS5 (API) systems - integration with many systems (elevator systems, building applications, SMS, BMS, PSIM, VMS, Active Directory systems)


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	• 17 ... 22 V AC • 10 ... 15 V DC • 22 ... 26 V DC
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	0.14 kg
Dimensions:	175 x 72 x 30 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

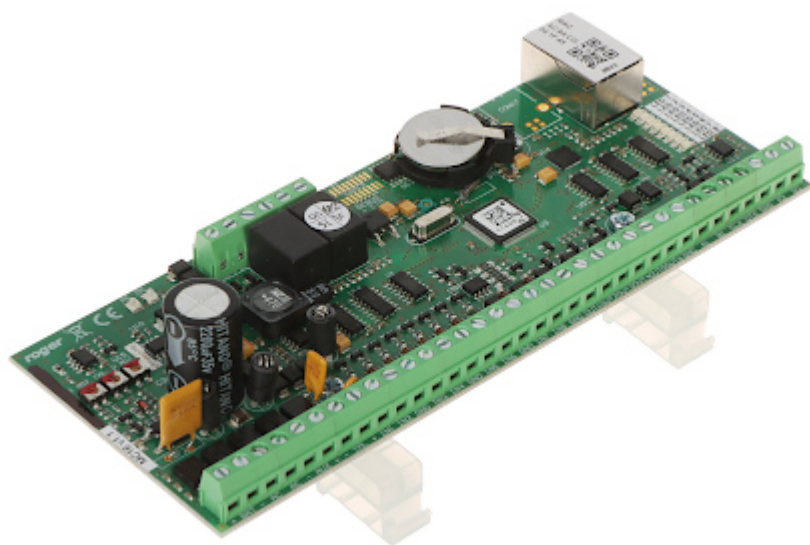


Top view:

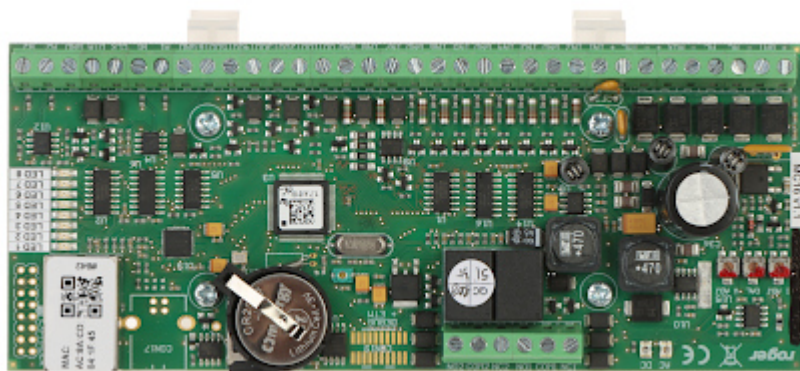

Connectors:

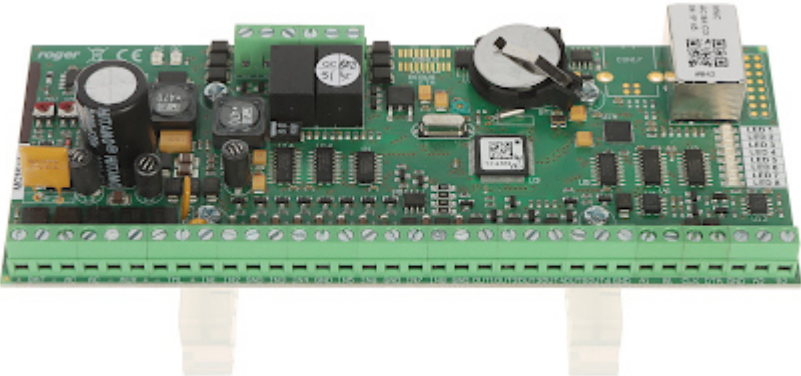

[illegible]

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

