

Code: MC16-PAC-EX-16

## ACCESS CONTROLLER MODULE **MC16-PAC-EX-16** ROGER

Net: 2 953.63 EUR Gross: 2 953.63 EUR

The MC16-PAC-EX-16 controller is a multifunctional electronic module, intended for use in the RACS 5 v2 system, which enables the implementation of access control of the transition and building automation.

**Attention!** The pre-installed license includes functionality relating to control of the 16 transitions and building automation.



### SPECIFICATION


|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of served transitions:  | 16 (two-way)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Number of supported readers:   | 64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Number of users:               | limited by license (max. no limit)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Number of media per ID:        | 8 - Proximity card, PIN code, fingerprint, etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Buffer memory:                 | 8 000 000 events buffer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Number of access zones:        | 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Number of alarm zones:         | 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Battery backup support:        | 12 V / 7 Ah                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Communication:                 | <ul style="list-style-type: none"><li>• Ethernet - RJ-45 socket</li><li>• RACS 5 v2 (Roger)</li><li>• RS-485 interface</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Main features:                 | <ul style="list-style-type: none"><li>• Integrated support in VISO EX software</li><li>• Functions in the VISO EX system: - MSSQL database</li><li>- work in distributed systems</li><li>- multi-station work</li><li>- monitoring of transitions with video preview</li><li>- T&amp;A event reporting</li><li>- maximum number of transitions in the system - unlimited</li><li>- division of the system into partitions operated by independent operators</li><li>- tool for integration with RACS5 (API) systems</li><li>- integration with many systems (elevator systems, building applications, SMS, BMS, PSIM, VMS, Active Directory systems)</li></ul> |
| Power supply:                  | <ul style="list-style-type: none"><li>• 17 ... 22 V AC</li><li>• 10 ... 15 V DC</li><li>• 22 ... 26 V DC</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Operation temp:                | 5 °C ... 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Permissible relative humidity: | 10 % ... 95 % (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Weight:                        | 0.14 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Dimensions:                    | 175 x 72 x 30 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Manufacturer / Brand:          | ROGER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Guarantee:

3 years

## PRESENTATION


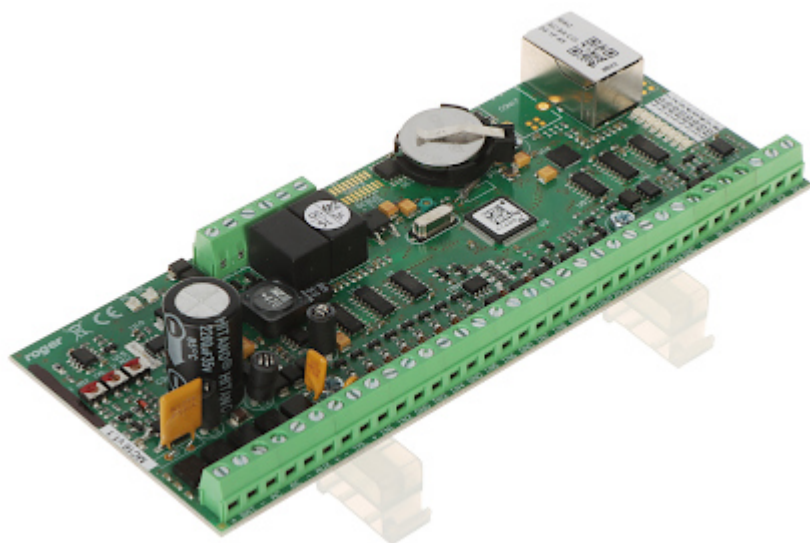


Top view:

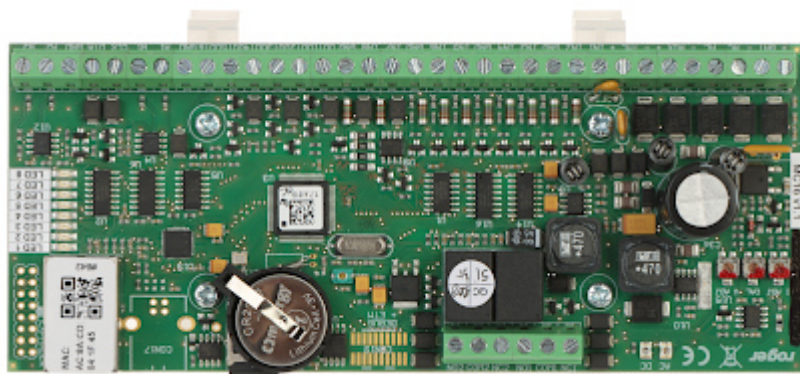


Connectors:




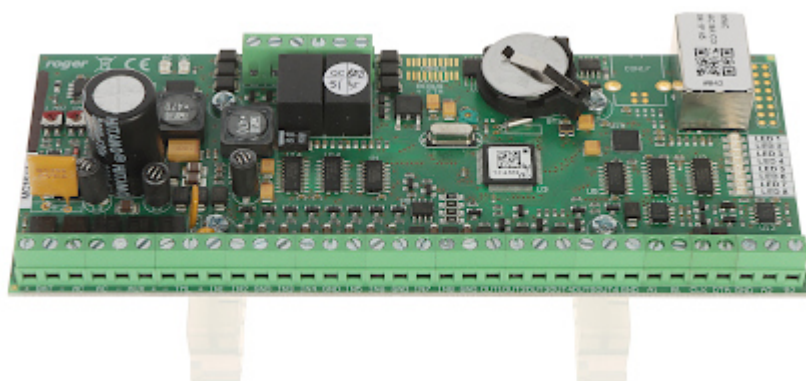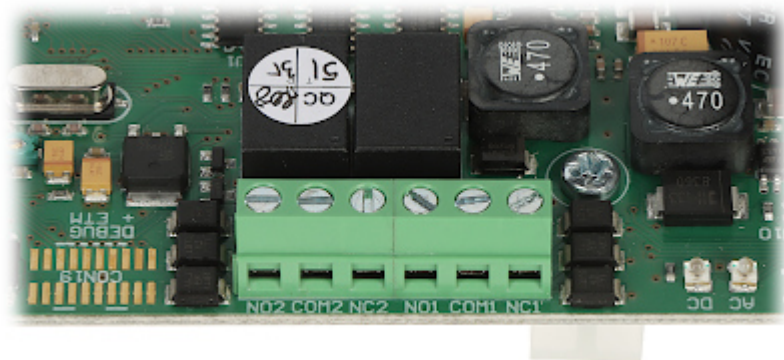

Mounting side view:

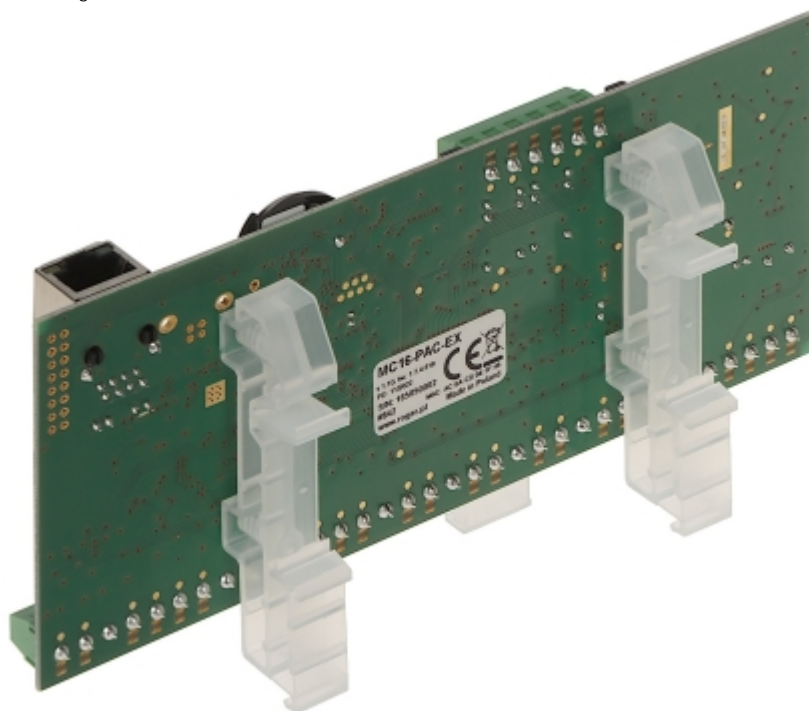

In the kit:

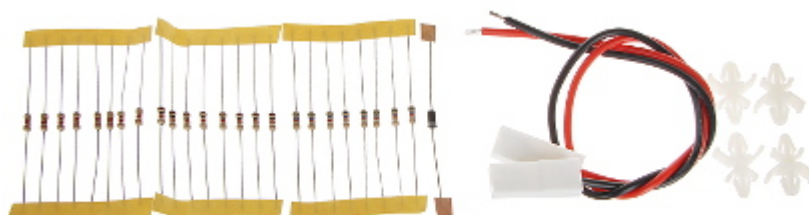

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

