

Code: PSB-1554828

BUFFERED POWER SUPPLY ADAPTER **PSB-1554828** PULSAR

Net: **46.28 EUR** Gross: **46.28 EUR**

The buffer PSU is intended for an uninterrupted supply to devices that require 48V DC (+/-15%).
Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!




SPECIFICATION

Adapter type:	Switching
Power voltage:	176 V ... 264 V AC
Output voltage:	• 44 ... 54 V DC (buffer operation), • 38 ... 54 V DC (battery operation)
Output voltage adjustment:	48 ... 56 V
Maximal load:	2.3 A + 0.5 A (battery charging)
Output power:	155 W (max)
Efficiency:	86 %
Number of outputs:	1 pcs
Protections:	• Short-circuit • Overvoltage • Overvoltage • Overload protection • Overheat
Operation temp. / Relative humidity:	-10 °C ... 40 °C / 20 % ... 90 %
Weight:	0.7 kg
Dimensions:	199 x 110 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


PRESENTATION

Adapter connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

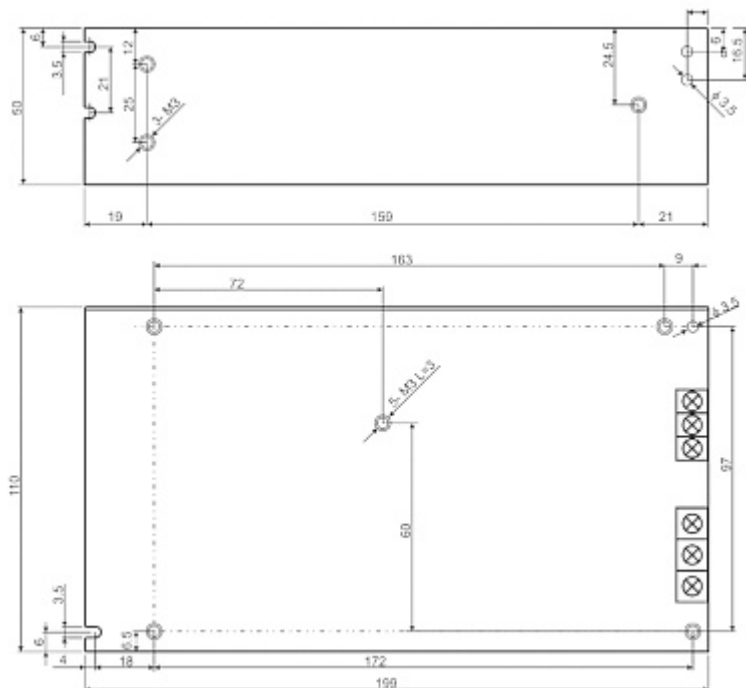

Connectors:

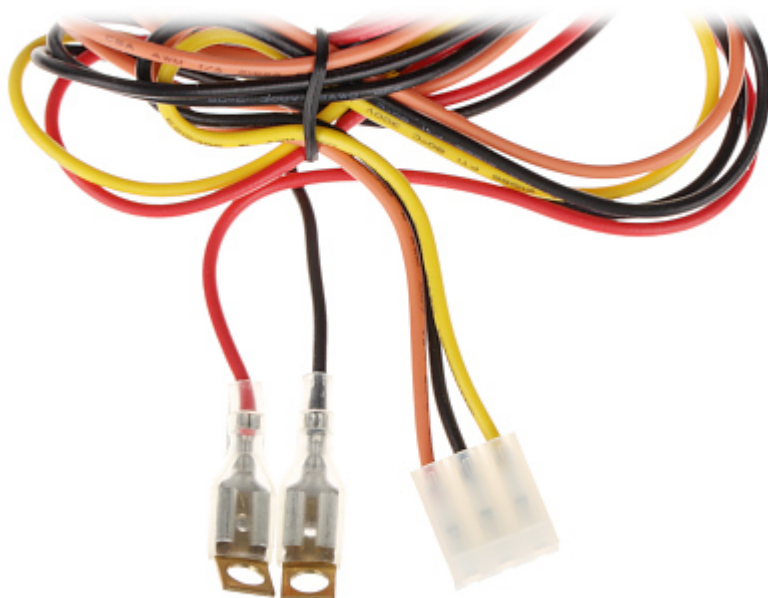


Schematic diagram:

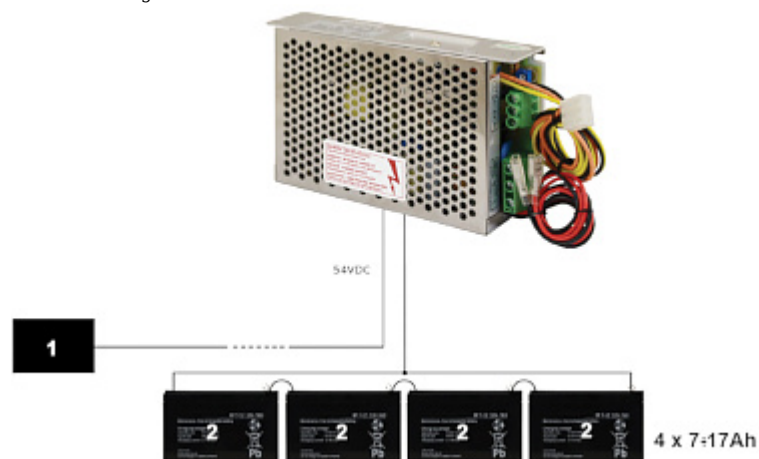

1. Receiver
2. Batteries

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

In the kit:

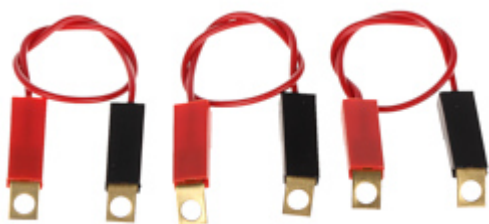

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60