

Code: PMT-48V150W1AA

SWITCHING ADAPTER **PMT-48V150W1AA** Delta Electronics

Net: **45.67 EUR** Gross: **45.67 EUR**

Power adapter with two pairs of output terminals.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.



SPECIFICATION


Adapter type:	Switching
Power voltage:	selectable by switch • 90 V ... 132 V AC, • 180 V ... 264 V AC
Output voltage:	48 V DC
Output voltage adjustment:	45.6 ... 52.8 V
Maximal load:	3.3 A
Output power:	158.4 W
Efficiency:	89 %
MTBF (Mean Time Between Faults):	> 700000 h - Telcordia SR-332
Number of outputs:	2 pcs
Operation temp. / Relative humidity:	-10 °C ... 70 °C / 5 % ... 90 %
Weight:	0.48 kg
Dimensions:	178 x 97 x 38 mm
Manufacturer / Brand:	Delta Electronics
Guarantee:	5 years

PRESENTATION

Adapter connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

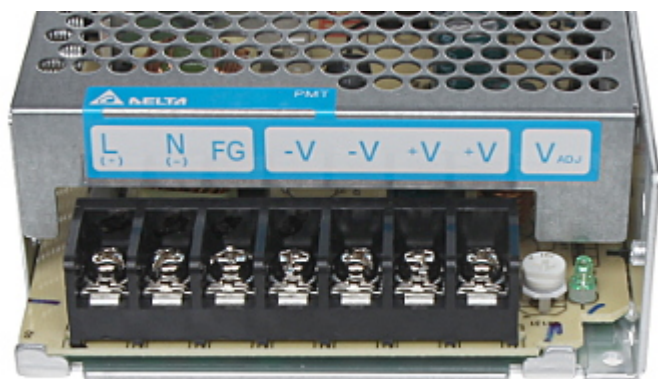

L - Live wire (230V)
 N - Neutral wire
 FG - Grounding
 -V - DC "-" output
 -V - DC "-" output
 +V - DC "+" output
 +V - DC "+" output
 ADJ - Output voltage adjustment
 Side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------