

Code: DS-2CE16F7T-IT3(2.8mm)

HD-TVI CAMERA **DS-2CE16F7T-IT3(2.8mm)** - 3.0 Mpx Hikvision

Net: **116.72 EUR** Gross: **116.72 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 3 Mpx. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction. Camera is according to IP66 Index of Protection norm.



SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	3.0 Mpx
Resolution:	1920 x 1536 - 3.0 Mpx , 1920 x 1080 - 1080p
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	• 84 ° (manufacturer data) • 80 ° (our tests result)
S/N ratio:	> 62 dB
Video output:	1 Vpp / 75 Ω - HD-TVI, BNC socket
Main features:	• WDR - 120 dB - Wide Dynamic Range • DNR - Digital Noise Reduction • EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners • ICR - Movable InfraRed filter • Mirror - Mirror image • BLC - Back Light Compensation • AGC - Automatic Gain Control • Auto White Balance
OSD menu:	OSD menu available via Hikvision HD-TVI recorder
"Index of Protection":	IP66
Power supply:	12 V DC / 420 mA
Power consumption:	≤ 5 W

Housing:	Compact, Metal
Color:	White / Black
Operation temp:	-40 °C ... 60 °C
Weight:	0.57 kg
Dimensions:	226 x 87 x 82 mm
Supported languages:	English
SAP Code:	300506312
Manufacturer / Brand:	Hikvision
Guarantee:	3 years


PRESENTATION





Side view:



Camera dimensions:

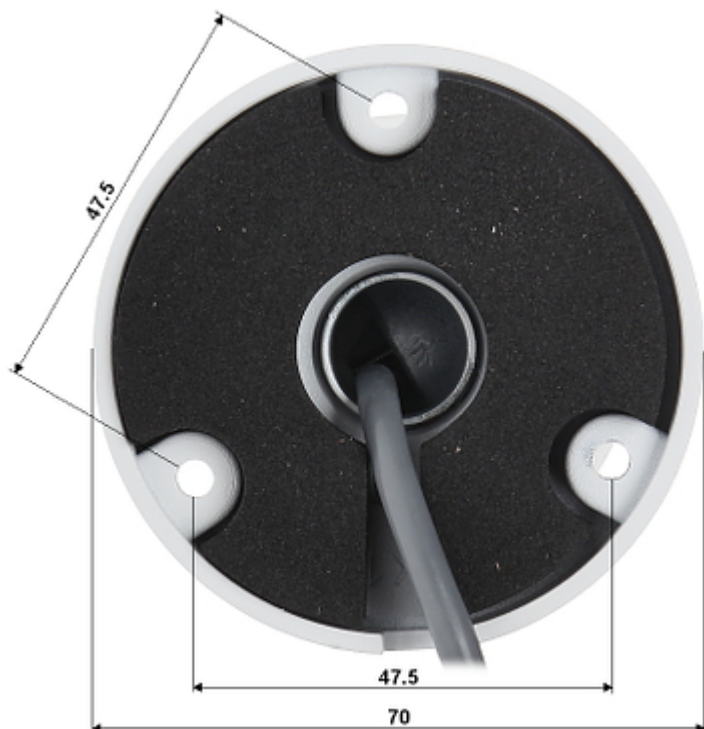

Mounting side view:

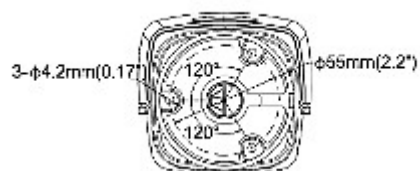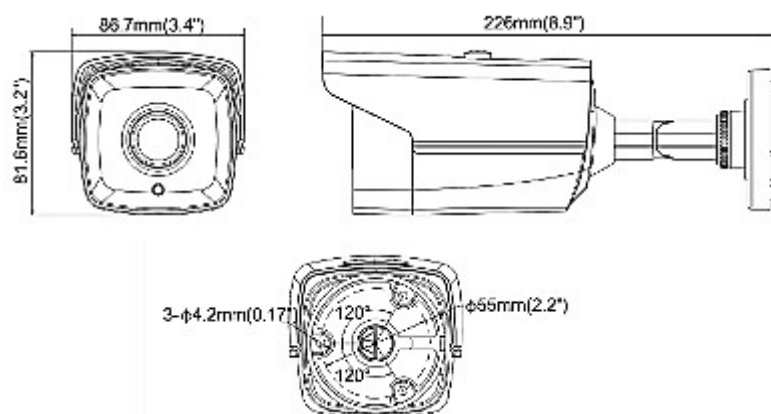

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------