

Code: DS-2CE16D0T-IR(2.8mm)

HD-TVI CAMERA **DS-2CE16D0T-IR(2.8mm)** - 1080p Hikvision

Net: **42.81 EUR** Gross: **42.81 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction. Camera is according to IP66 Index of Protection norm.



SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p @ HD-TVI
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	• 103 ° (manufacturer data) • 101 ° (our tests result)
S/N ratio:	> 62 dB
Video output:	1 Vpp HD-TVI / 75 Ω - HD-TVI, BNC socket
Main features:	• DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • BLC - Back Light Compensation • AGC - Automatic Gain Control • Auto White Balance
OSD menu:	—
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W
Housing:	Compact, Metal
Color:	White / Black
"Index of Protection":	IP66

Operation temp:	-40 °C ... 60 °C
Weight:	0.3 kg
Dimensions:	150 x Ø 70 mm
Supported languages:	—
Manufacturer / Brand:	Hikvision
SAP Code:	300506213
Guarantee:	3 years

PRESENTATION




Side view:




Mounting side view:



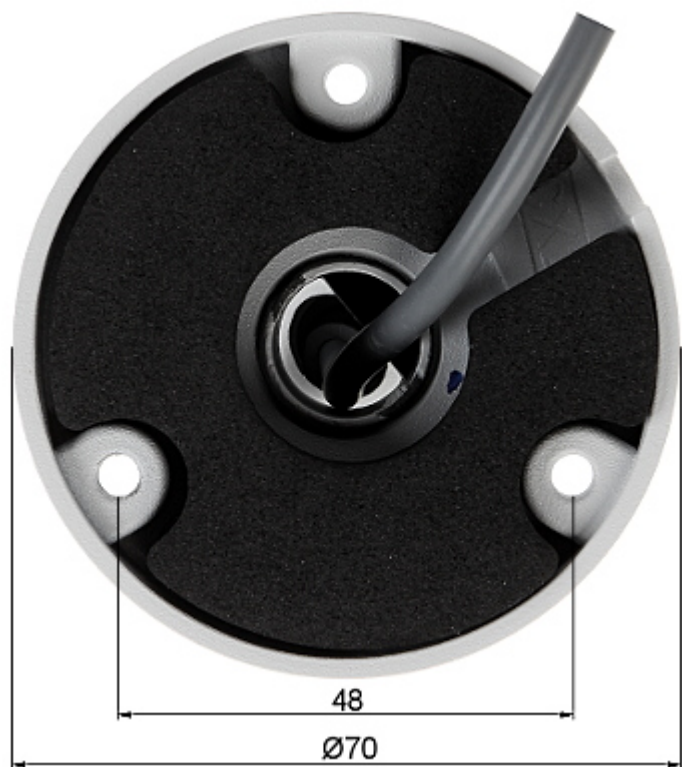

Camera dimensions:

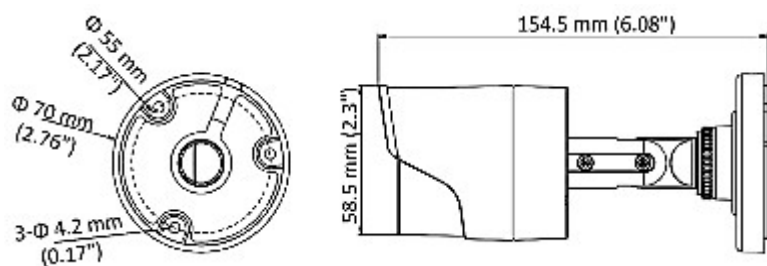

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------