

Code: ETI-D01/4A

FUSE LINK **ETI-D01/4A** 4 A 400 V gL/gG E14 ETI

Net: **1.06 EUR** Gross: **1.06 EUR**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



SPECIFICATION


Rated current:	4 A
Rated voltage:	250 V DC, 400 V AC
Fusing characteristics:	gL/gG
Fuse base:	E14
Type:	D0
Size:	D01
Breaking capacity:	50 kA AC, 8 kA DC
Main features:	• Low power and energy losses • Small temperature increase • High ability to limit short-circuit current • Stability of current-time characteristics and full selectivity of operation • Selective cooperation with over-current circuit breakers
Housing:	Ceramic
Weight:	0.0059 kg
Dimensions:	Ø 11 x 36 mm Ø 7.3 mm (A)
Manufacturer / Brand:	ETI
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Dimensions:

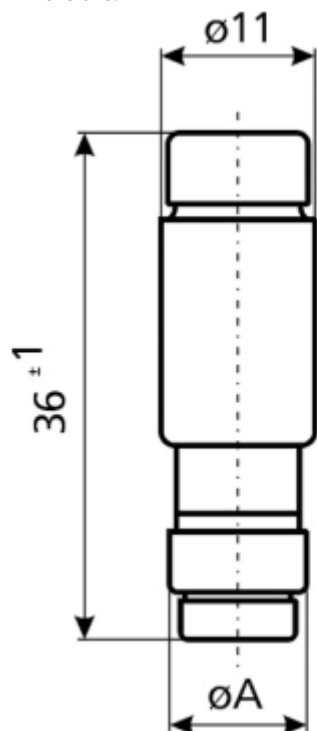

I_n [A]	ØA
2	7,3
4	7,3
6	7,3
10	8,5
13	8,5
16	9,7

Time-current characteristics:

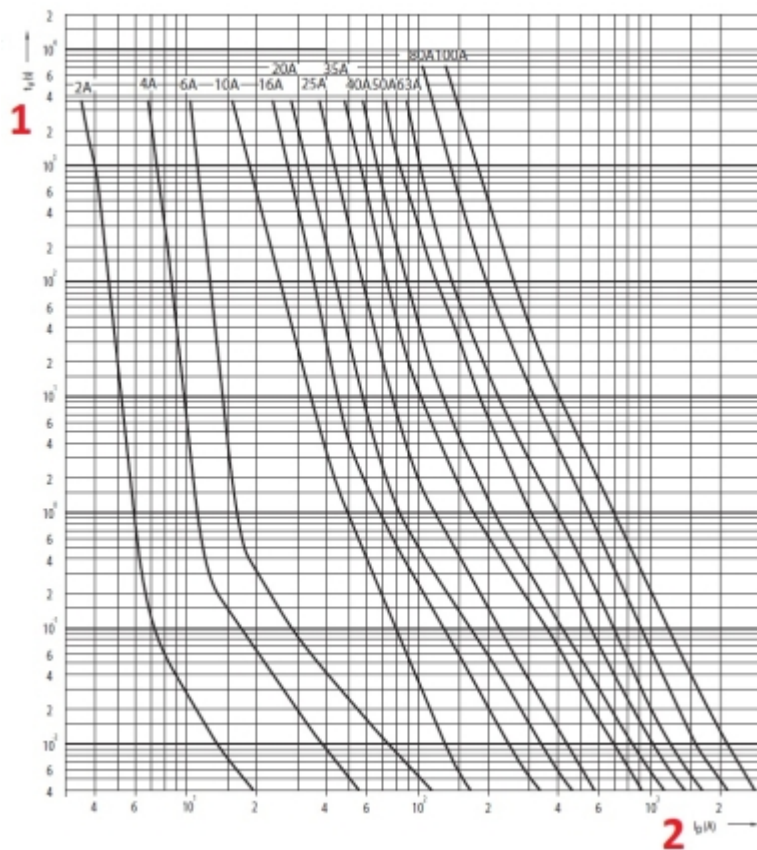

1. Prearcing time (s)
2. Prospective current (A)

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60