

Code: KIT/IPC-B32P/FSP12

SURVEILLANCE KIT **KIT/IPC-B32P/FSP12** Wi-Fi Cell Go - 3 Mpx 2.8 mm IMOU

Net: **98.13 EUR** Gross: **98.13 EUR**

The cameras of the IMOU series have been designed with special care to simplify the configuration and operation. Thanks to the battery power, you can place them anywhere without any wiring problems. In combination with the user friendly IMOU platform, the IMOU series devices allow anyone to create a simple and effective surveillance system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. The used Wi-Fi module allows to remote communication with camera for max. distance up to 50 m.

For outdoor use. Camera is according to IP65 Index of Protection norm.



SPECIFICATION

Standard:	IP
Resolution:	2304 x 1296 - 3 Mpx
Sensor:	Progressive Scan CMOS
Lens:	2.8 mm
View angle:	98 °
Range of IR illumination:	7 m
Audio:	• Microphone built-in, • Speaker built-in, • Bi-directional audio streaming support, • Alarm siren - 90 dB
Image compression method:	H.265 / H.264
Main stream frame rate:	15 fps @ 3 Mpx
Network interface:	Wi-Fi - IEEE 802.11 b/g/n/ac - 2.4 GHz
Mobile phones support:	Access by a cloud (P2P) • Android: Free application IMOU • iOS (iPhone): Free application IMOU
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	DHCP
Internal memory:	4 GB eMMC
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n/ac, Range : 50 m (open area), • Ability to set your own mode of operation, • VLOG mode - possibility of manual recording by pressing the button on the case, • micro USB socket • PIR detector - Built-in • People detection

Power supply:	• built-in battery : 5000 mAh • 5 V DC / 2 A (power adapter not included) • FSP12 Solar Panel
Power consumption:	≤ 3.5 W
"Index of Protection":	IP65
Operation temp:	-20 °C ... 50 °C
Weight:	0.21 kg
Dimensions:	88 x 60 x 41 mm (without bracket)
Supported languages:	—

FSP12 Solar Panel:

Output voltage:	6.2 V DC @ micro USB
Output current:	484 mA
Output power:	3 W
Length of the cables:	2.75 m
Weight:	0.3 kg (without bracket)
Dimensions:	198 x 140 x 29 mm (without bracket)

General information:

Manufacturer / Brand:	DAHUA / IMOU
Guarantee:	2 years

PRESENTATION

CAMERA:



Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



micro USB connector:




Bottom view (control buttons visible):





Solar Panel:

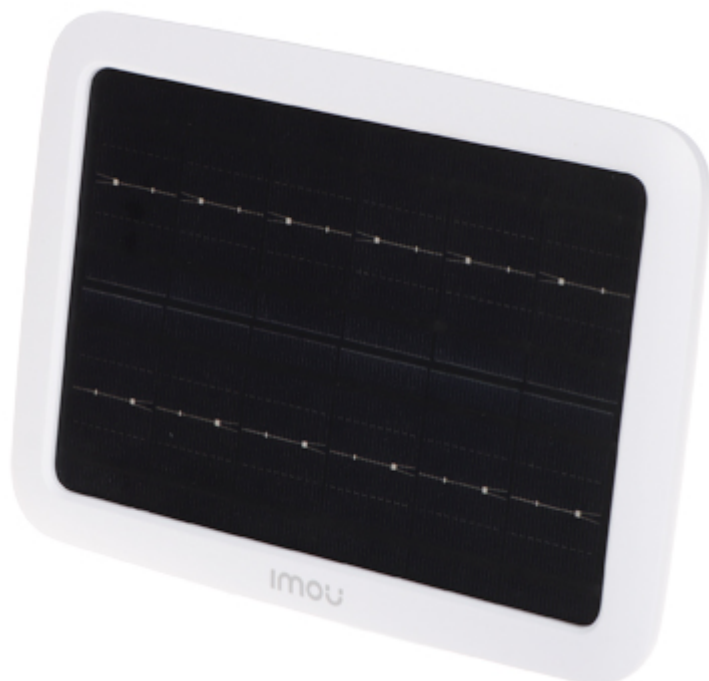

Rear view:



Connector:



In the kit:



OUR OPINIONS



- Very small camera dimensions.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------