

Code: DS-KH8520-WTE1/EU

INDOOR PANEL Wi-Fi / IP **DS-KH8520-WTE1/EU** Hikvision

Net: **459.63 EUR** Gross: **459.63 EUR**

The DS-KH8520-WTE1/EU panel has been designed to create a simple and effective system of local communication.

A device dedicated to work with modular video doorphones Hikvision IP. It can be also used as simple alarm control panel, or notification module by the support 8 alarm inputs.

The device is fully configurable via the **iVMS4200** software. In addition, the device has the ability to work with the **Hik-Connect** application on mobile devices.



SPECIFICATION

Compatibility:	IP Hikvision modular video doorphones
Shield:	10.1 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save photos if there is no response to the bell button, • IP Hikvision cameras support, • The ability of direct communication between two or more panels, • Register a short voice message if there is no response to the bell button • Support for capturing a photo during video calls • The microSD cards support max. 32 GB (not included) • The device is fully configurable via the iVMS4200 software. • In addition, the device has the ability to work with the Hik-Connect application on mobile devices
Controlling:	capacitive touch screen
Default administrator password:	— The administrator password should be set at the first start
Default password for securing the zone:	123456
Alarm inputs:	8
Alarm outputs:	2

Power supply:	• 12 V DC, • PoE (802.3af)
Power consumption:	≤ 6 W
Color:	Black
Operation temp:	-10 °C ... 55 °C
Weight:	0.67 kg
Dimensions:	254 x 166 x 15 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301485
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:






Device connectors:





The diagram illustrates a network architecture for a multi-unit building. It shows three identical units, each containing a computer (1) and a monitor (2). These units are connected to a central network switch (3). The switch is connected to a LAN (4) and a server (5). The server is connected to a storage unit (6) and a backup unit (7). A legend indicates UTP (green line) and RVV (blue line) connections.

- In the kit:

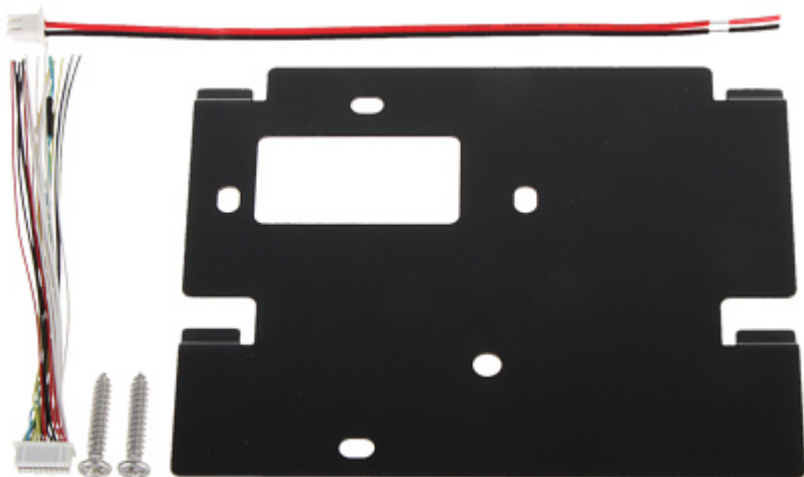

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------