

Code: DS-KV8102-IP

VIDEO DOORPHONE **DS-KV8102-IP** Hikvision

Net: **170.59 EUR** Gross: **170.59 EUR**



The device is dedicated to work with Hikvision I generation indoor panels.

SPECIFICATION

Sensor:	1.3 Mpx CMOS
LED illuminator:	—
IR illuminator:	✓
Compatibility:	Hikvision IP Video Doorphones
proximity reader built-in:	Access control cards - 13.56 MHz S50
UTP category:	UTP cat. 5e
Alarm inputs:	4 pcs
Relay outputs:	1 pcs NO/NC
RS-485:	✓
Ethernet:	1 x RJ-45 - 10/100 Base-T
Main features:	• Doorbell button, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface ,
Operation temp:	-40 °C ... 70 °C
Power supply:	• 12 V DC / 1 A, • 24 V PoE
Housing:	Plastic, Waterproof
"Index of Protection":	IP65

Color:	Silver
Weight:	0.27 kg
Dimensions:	164 x 97 x 40 mm
Supported languages:	English, Polish, Serbian, Hungarian
Manufacturer / Brand:	Hikvision
SAP Code:	305300117
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors view:



Connectors description:

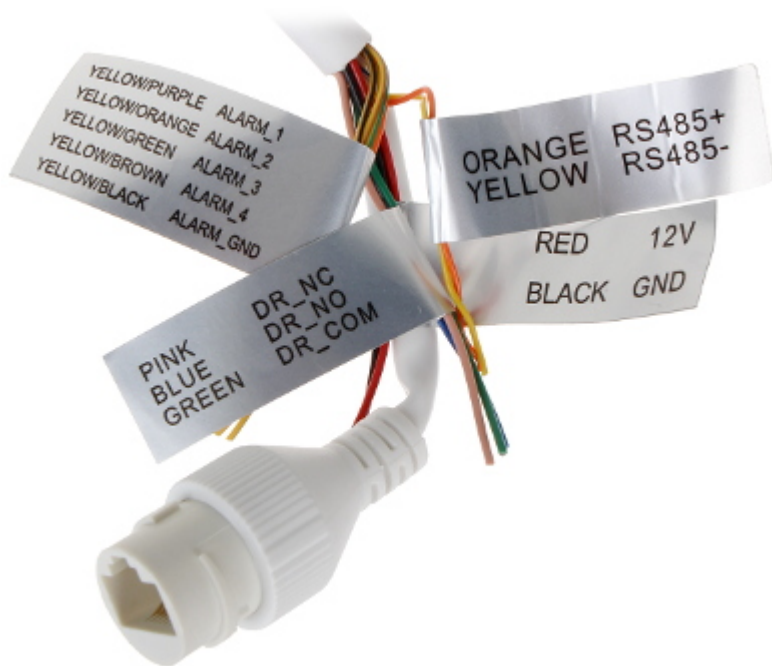

Examples of connection diagrams:

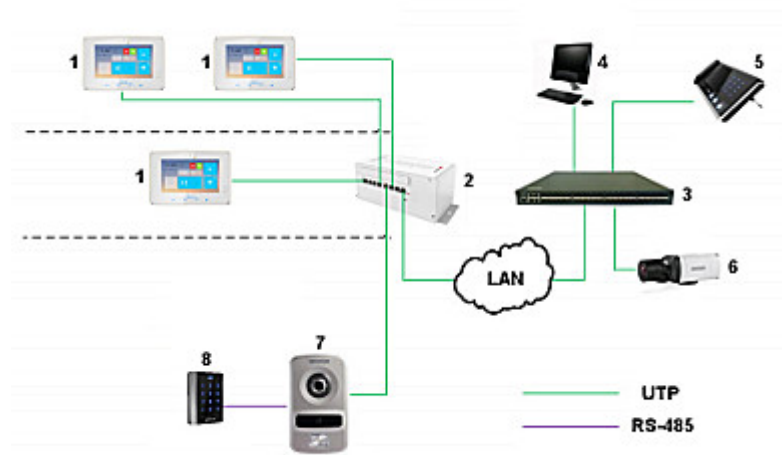

1. INDOOR PANEL
 2. Switch dedicated to intercom systems
 3. Switch
 4. Remote client
 5. System management center
 6. IP cameras
 7. Video doorphone
 8. Reader with keypad
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

