

Code: ITC215-PW4I-IRLZF27135

IP CAMERA ANPR **ITC215-PW4I-IRLZF27135** - 1080p 2.7 ... 13.5 mm - MOTOZOOM DAHUA

Net: **872.33 EUR** Gross: **872.33 EUR**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p , 1280 x 720 - 720p , 704 x 576 - D1
Lens:	2.7 ... 13.5 mm - Motozoom
View angle:	119 ° ... 32 °
Range of IR illumination:	12 m
S/N ratio:	> 50 dB (AGC off)
Compression:	H.265 / H.264
Main stream frame rate:	25 fps - 1080p
Optimal distance for ANPR monitoring:	3 ... 8 m
Network interface:	100/1000 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, TCP/IP, UDP, NTP, DHCP, DNS
WEB Server:	Built-in, NVR compliance
Memory card slot:	Micro SD memory cards up to 64GB support (possible local recording)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Max. number of on-line users:	20
ONVIF:	✓
Alarm inputs / outputs:	3 / 3
Audio:	• External microphone input • Audio output • Bi-directional audio streaming support
RS-485 interface:	2 x
Mobile phones support:	—
Main features:	• Max. speed of a moving vehicle : 40 km/h • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Motozoom lens - Control from a Web browser • Built-in LPR Deep learning engine • Image analysis : License plate recognition, Gate opening, detection of 11 vehicle colors (during the day), White list - database of 10000 records in the camera • Detection models: based on video or induction loop • Support for 11 vehicle sizes: large bus, medium bus, large truck, medium truck, small truck, sedan, minivan, SUV, MPV, pick-up and minicar • ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto)
Power supply:	• PoE (802.3at), • 12 V DC
Housing:	Compact, Metal + Plastic
Color:	White + Black
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-30 °C ... 65 °C
Weight:	2.36 kg (with bracket)
Dimensions:	• 297 x 124 x 108 mm (without bracket) • 482 x 124 x 196 mm (with bracket)
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:



Bottom view:






Connectors:



Connectors description:



Dimensions:

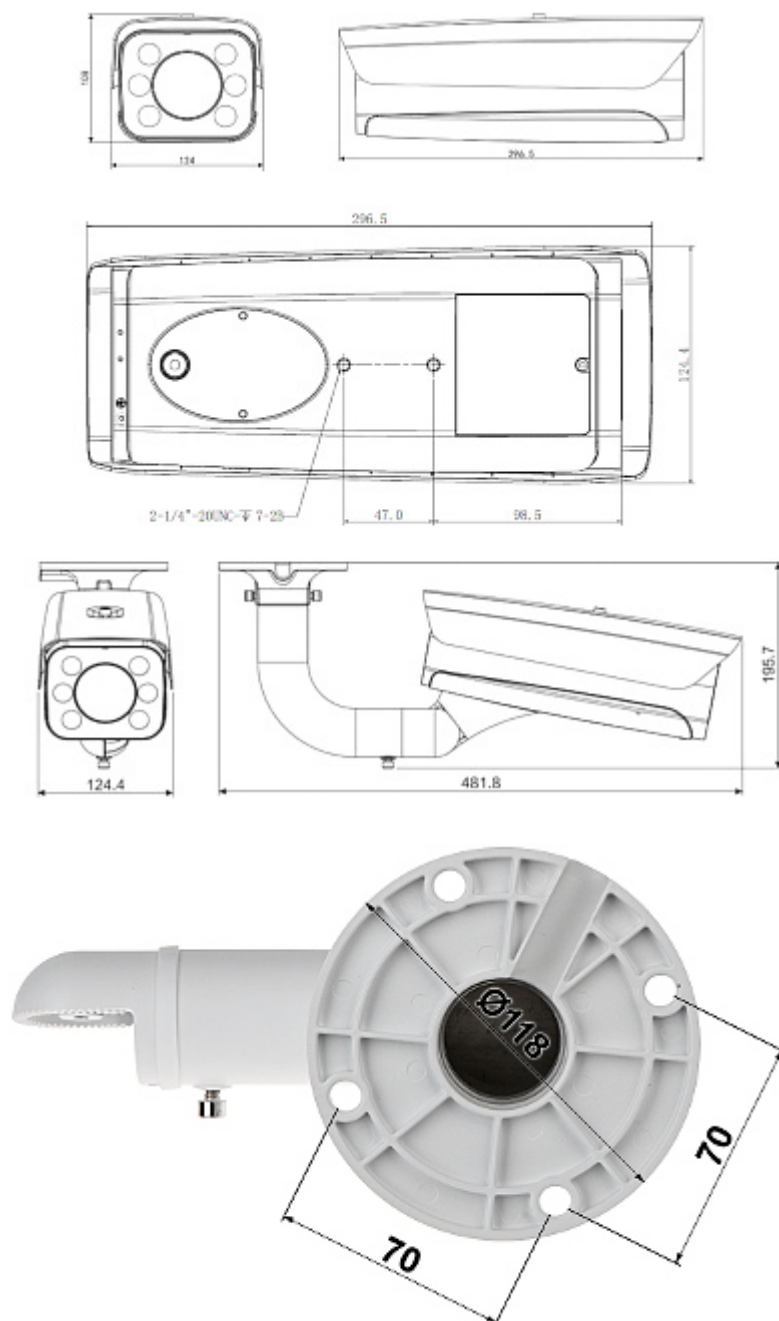

See how to initialize DAHUA cameras:

:

In the kit:



OUR OPINIONS



- Motozoom lens.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60