

Code: SD2A500HB-GN-A-PV-S2

IP SPEED DOME CAMERA OUTDOOR **SD2A500HB-GN-A-PV-S2** - 5 Mpx 4 mm DAHUA

Net: **216.70 EUR** Gross: **216.70 EUR**

Camera equipped with Full-Color technology, which allows you to obtain a clear color image even at night and has the function of active audio-visual deterrence in combination with AI artificial intelligence functions.

Built-in Infra-Red illuminator enables night monitoring. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " STARVIS™ CMOS
Matrix size:	5 Mpx
Resolution:	2560 x 1920 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 1920 x 1080 1080p , 1280 x 960 1.3 Mpx , 1280 x 720 - 720p
Lens:	4 mm
View angle:	• 80 ° (manufacturer data) • 77 ° (our tests result)
Optical zoom:	—
Digital zoom:	—
Range of IR illumination:	30 m
White light LED illuminator range:	30 m
Video output:	—
Rotation speed (manual control):	0.1 °/s ... 74 °/s (horizontal) 0.1 °/s ... 36 °/s (vertical)
Preset rotation speed:	max. 62 °/s (horizontal) max. 36 °/s (vertical)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Horizontal rotation range:	0 ° ... 345 ° - Rotation of the head is limited by stops
Vertical rotation range:	0 ° ... 80 °
RS-485 interface:	—
Number of presets:	300
Horizontal scan:	—
Route settings:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	—
Main stream frame rate:	• 20 fps - 5 Mpx • 25 fps - 4 Mpx
Memory card slot:	Micro SD memory cards up to 512GB support (possible local recording)
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	UDP, FTP, RTMP, IPv4/IPv6, IP Filter, DNS, RTCP HTTP, HTTPS, TCP/IP, NTP, SSL, DHCP, RTP, RTSP, SMTP, DDNS, ARP
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	21.06
Audio:	• Microphone built-in • Speaker built-in • Audio detection • Bi-directional audio streaming support • Compliance with the AAC standard
Mobile phones support:	Port 37777 • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• D-WDR - Wide Dynamic Range • 2-DNR, 3-DNR - Digital Noise Reduction • Day/night mode • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • ICR - Movable InfraRed filter • The camera is equipped with a built-in heater with a thermostat • Motion Detection • Configurable Privacy Zones • Mirror - Mirror image • Active deterrence function - Light and sound alarm • Smart motion detection (with recognizing people and vehicles) • IVS analysis : intrusion : crossing the line (tripwire)
Power supply:	• PoE (802.3af), • 12 V DC / 1090 mA
Power consumption:	≤ 13 W



Housing:	Speed Dome, Plastic
Color:	White + Black
"Index of Protection":	IP66
Operation temp:	-30 °C ... 55 °C
Weight:	0.44 kg
Dimensions:	Ø 111 x 140.5 mm (without bracket)
Supported languages:	English, Spanish
Manufacturer / Brand:	DAHUA
Guarantee:	5 years

PRESENTATION

Rear view:



RESET button:






Camera bracket:



Top view:



Dimensions:

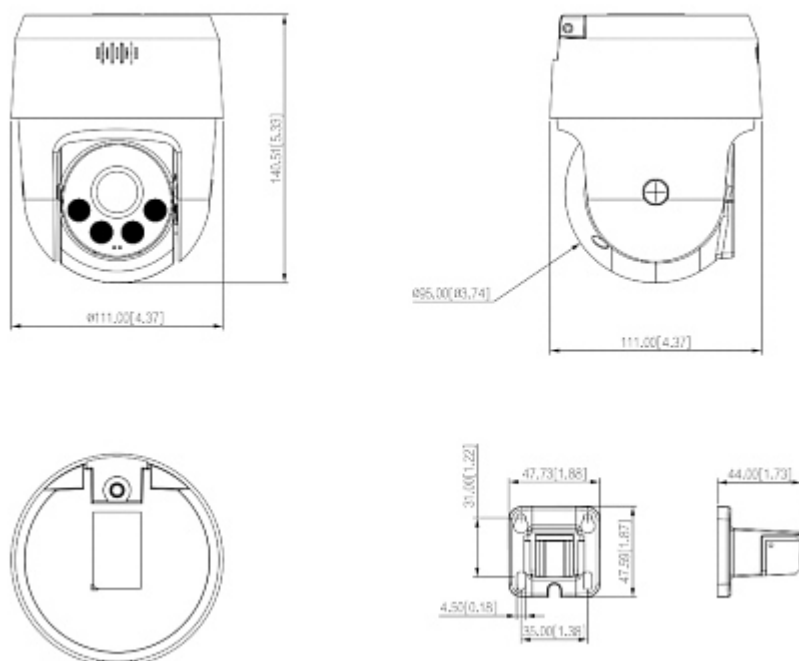

See how to initialize DAHUA cameras:

:

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------